
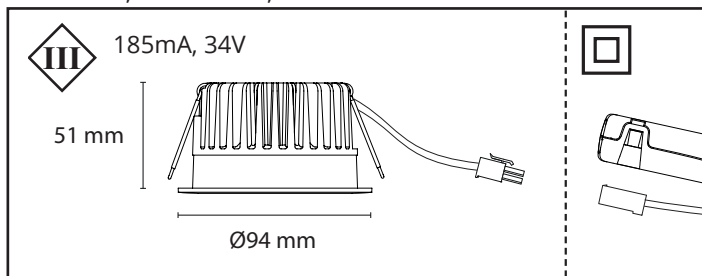
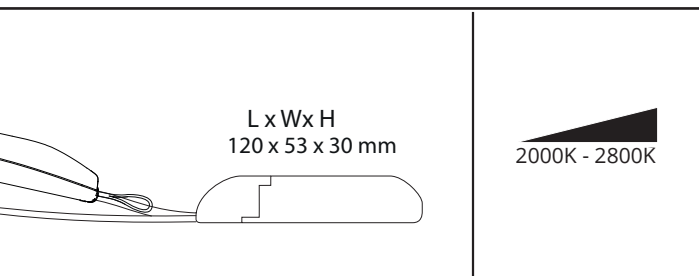
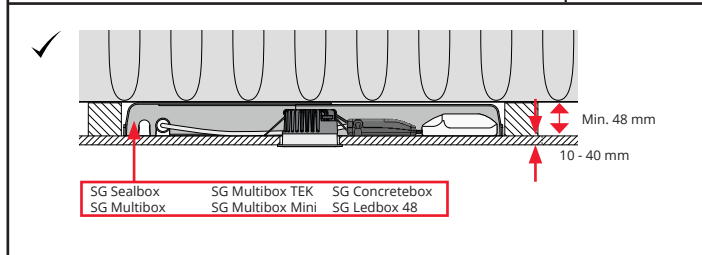
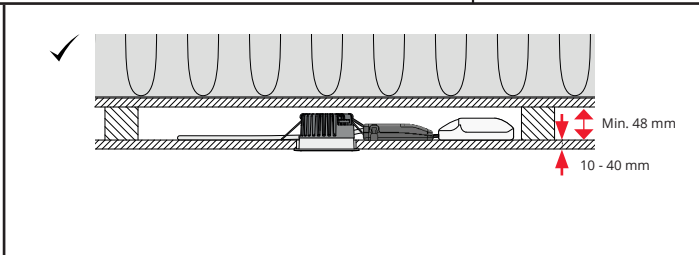
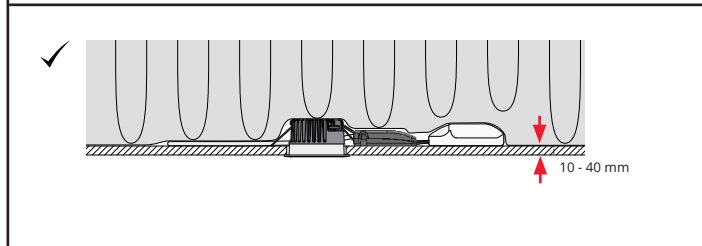
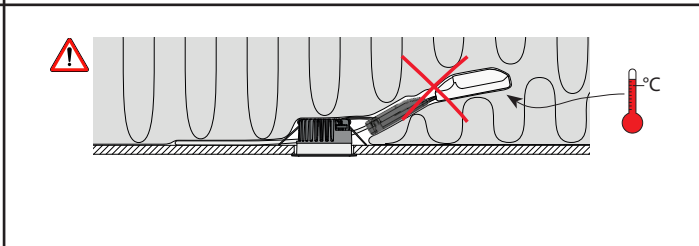
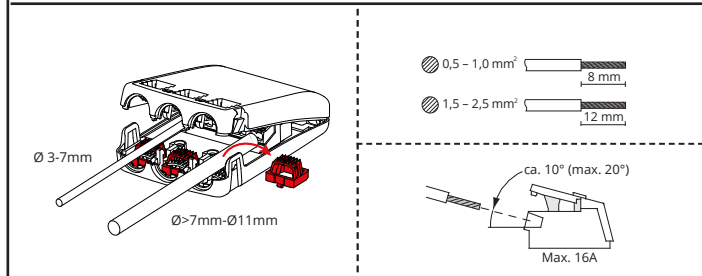


Soft IsoSafe DimToWarm DALI

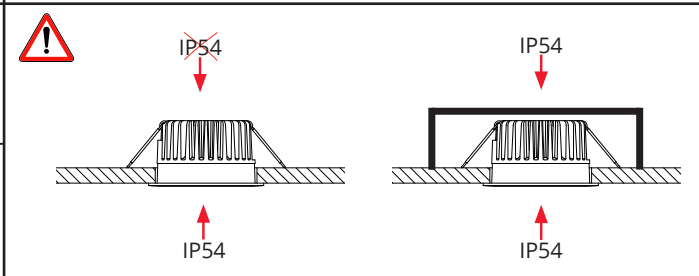

220-240V, 0/50/60Hz, 8W

	
	
	
	
NO: Kan kun installeres og vedlikeholdes av en registrert installasjonsvirksomhet. DK: Må kun installeres og vedligeholdes af uddannet elektriker. SE: Skall installeras och underhållas av behörig elektriker. EN: Only to be installed and maintained by an authorized electrician. FR: Doit être installé et maintenu par un électricien qualifié. NL: Mag alleen geïnstalleerd en onderhouden worden door een bevoegde elektricien. DE: Dieses Produkt darf nur durch autorisiertes Personal (z.B. Elektro-Installateur) angeschlossen, in Betrieb genommen und gewartet werden. FI: Asentaa ja huoltaa saa vain valtuutettu sähköasentaja	NO: Skru av strømmen før montering. DK: Sluk for strømmen inden montering. SE: Stäng av strömmen innan montering. EN: Turn off power before installing. FR: Couper le courant avant l'installation. NL: Stroom uitschakelen voor u het toestel installeert. DE: Vor Installationsarbeiten den Strom abschalten. FI: Sammuta virta ennen kytkestä NO: Minimumsavstand til brennbart materiale i armaturens stråleretning: 0,01m DK: Mindste afstand til brændbare materialer i armaturets stråleretning: 0,01m SE: Minsta avståndet till brännbara material i armaturens strålrättning: 0,01m EN: Minimum distance to flammable material in the beam direction: 0,01m FR: Distance minimum entre le faisceau lumineux de l'armature et toute matière inflammable: 0,01m NL: Minimale afstand tussen de lichtstraal van de armatuur en het brandbaar materiaal: 0,01m DE: Der kleinste Abstand zum brennbaren Material in die Richtung des Lichtstrahls: 0,01m FI: Pienin etäisyys palavaan materiaaliin valaisimen suunnassa: 0,01m

NORWAY

SG Armaturen AS
Skytterheia 25
N-4790 Lillesand

Tel: +47 37 50 03 00
firmapost@sg-as.no
www.sg-as.no

SWEDEN

SG Armaturen AB
Tel: +46 31 81 71 10
info@sg-ab.se
www.sg-ab.se

FINLAND

SG Armaturen Oy
info@sg-oy.fi
www.sg-oy.fi

DENMARK

SG Armaturen A/S
Tel: +45 70 70 72 13
info@sg-as.dk
www.sg-as.dk

UNITED KINGDOM

SG Lighting LTD
Tel: +47 37 50 03 00
info@sglighting.co.uk
www.sglighting.co.uk

FRANCE

SG Lighting SA/NV
Tel: +33(0) 4 94 93 00 00
info.france@sglighting.fr
www.sglighting.net

BENELUX


SG Lighting SA/NV
Tel: +32(0) 15 20 72 71
info.benelux@sglighting.net
www.sglighting.net

GERMANY

SG Leuchten GmbH
Tel: +49 40 23 99 44 59
info@sg-leuchten.de
www.sg-leuchten.de

INTERNATIONAL

SG Lighting Co Ltd.
Tel: +86 769 88 49 20 88
cindy@sgdgc.com
www.sg-as.com

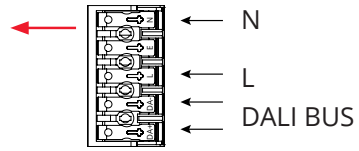

The diagram shows a circular button labeled "Reset:". Inside the button is a switch mechanism with four horizontal bars labeled "DA", "DA", "L", and "N" from top to bottom. The top two "DA" bars are connected to a common terminal on the left. The "L" bar is connected to a common terminal on the right. The "N" bar is connected to a common terminal on the right. A red arrow points to the switch mechanism. Below the button is a clock icon and the text "30 sec.".