


# PRODUCT DATASHEET

## PL PFM 600 36 W 3000 K

PANEL PERFORMANCE 600 | Square recessed panel luminaires, tool-free installation, for 600 x 600 mm ceiling systems

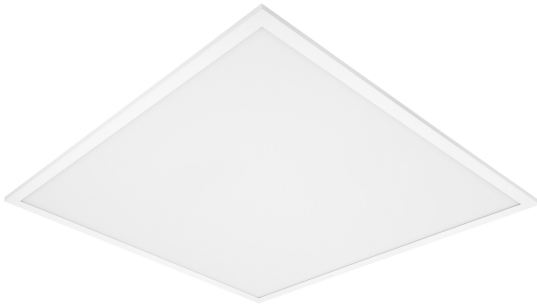

---

### Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, conference rooms
- Reception areas, foyers, corridors, elevators
- Suitable for recessed ceiling systems with grid size of 600 x 600 mm

---

### Product benefits

- Tool-free electrical connection due to push button connector
- Through-wiring possible with included connector box
- Energy savings thanks to high system efficacy: up to 120 lm/W
- Comfortable light and high color consistency
- Extended services such as energy monitoring and remote maintenance possible with DALI versions
- External driver for extended flexibility and easy installation
- Low flicker light thanks to special electronic control gear
- 5 years guarantee

---

### Product features

- Extruded aluminum frame
- Polystyrene diffuser
- 3-pole terminal block, cable cross section up to 3 x 2.5 mm<sup>2</sup> (25 W and 30 W versions)
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm<sup>2</sup> (36 W versions and DALI types)



- Luminaire versions with IoT-ready DALI-2 driver available
- Lifetime (L80/B10): up to 60,000 h (at 25 °C)

---

**TECHNICAL DATA****Electrical data**


|                                          |                     |
|------------------------------------------|---------------------|
| Nominal wattage                          | 36.00 W             |
| Nominal voltage                          | 220...240 V         |
| Mains frequency                          | 50...60 Hz          |
| Nominal current                          | 160 mA              |
| Inrush current                           | 30 A                |
| Inrush current time $T_{h50}$            | 200 $\mu$ s         |
| Max. no. of lum. on circuit break. B16 A | 13                  |
| Max. no. of lum. on circuit break. C10 A | 12                  |
| Max. no. of lum. on circuit break. C16 A | 19                  |
| Power factor $\lambda$                   | > 0.95              |
| Total harmonic distortion                | < 10 %              |
| Protection class                         | II                  |
| Operating mode                           | External LED driver |

**Photometrical data**

|                                              |            |
|----------------------------------------------|------------|
| Luminous flux                                | 4320 lm    |
| Luminous efficacy                            | 120 lm/W   |
| Color temperature                            | 3000 K     |
| Light color (designation)                    | Warm White |
| Color rendering index Ra                     | > 80       |
| Standard deviation of color matching         | 3 sdcn     |
| Luminous intensity                           | -          |
| Low flicker                                  | Yes        |
| Flickering metric (Pst LM)                   | -          |
| Stroboscope effect metric (SVM)              | -          |
| Photobiological safety group acc. to EN62778 | RG0        |
| Photobiological safety group acc. to EN62471 | RG0        |
| Beam angle                                   | 120 °      |
| UGR                                          | < 22       |




LDC typ cone

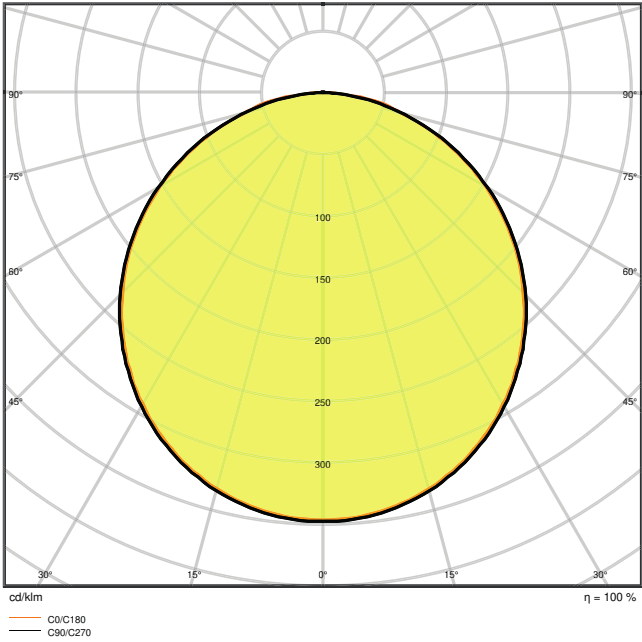

LDC typ polar

Dimensions & Weight

|                |           |
|----------------|-----------|
| Length         | 595.00 mm |
| Width          | 595.00 mm |
| Height         | 32.00 mm  |
| Product weight | 1650.00 g |

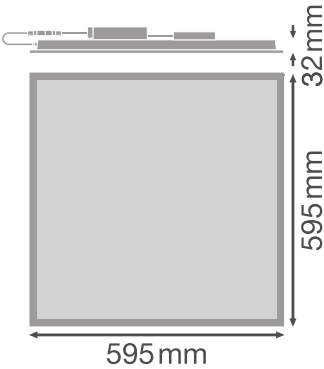

## Materials &amp; Colors

|                                            |                  |
|--------------------------------------------|------------------|
| Product color                              | White            |
| Housing color                              | White            |
| Body material                              | Steel            |
| Cover material                             | Polystyrene (PS) |
| Light emitting surface material            | Polystyrene      |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C           |
| Mercury content                            | 0.0 mg           |

## Application &amp; Mounting

|                                        |                            |
|----------------------------------------|----------------------------|
| Ambient temperature range              | -10...+50 °C               |
| Type of connection                     | Screwless terminal         |
| Type of protection                     | IP40/IP20                  |
| Protection class IK (shock resistance) | IK02                       |
| Dimmable                               | No                         |
| Mounting type                          | Recessed/Suspended/Surface |
| Mounting location                      | Ceiling / Wall             |
| Application environment                | Indoor                     |
| Mounting length                        | 575 mm                     |
| Mounting width                         | 575 mm                     |
| Mounting depth                         | 80,0 mm                    |
| LED module replaceable                 | Not replaceable            |
| With light source                      | Yes                        |

## Lifespan

|                            |          |
|----------------------------|----------|
| Lifespan L70/B50 at 25 °C  | 100000 h |
| Lifespan L80/B10 at 25 °C  | 60000 h  |
| Lifespan L90/B10 at 25 °C  | 35000 h  |
| Number of switching cycles | 50000    |

## Control gear

|                             |                                   |
|-----------------------------|-----------------------------------|
| Output current              | 760 mA                            |
| ECG - Output ripple current | < 5 %                             |
| Recommended control gear    | OSRAM OTI DALI 50/220-240/1A4 NFC |

## Certificates &amp; Standards

|           |                      |
|-----------|----------------------|
| Standards | CE / CB / ENEC / EAC |
|-----------|----------------------|

|                                                      |    |
|------------------------------------------------------|----|
| Luminaire with limited surface temperature, "D sign" | No |
| Ball shot safe                                       | No |

## EQUIPMENT / ACCESSORIES

- Accessories for several mounting options available
- Connector box with 3-pole or 5-pole terminal included
- Security rope for luminaire included
- Security brackets included
- External control gear included
- Not suitable for use with Emergency Conversion Box

## DOWNLOAD DATA

| Documents and certificates                                                          |                               |
|-------------------------------------------------------------------------------------|-------------------------------|
|     | User instruction              |
|     | Addon Technical Information   |
|    | Packaging insert              |
|   | Declarations Of Conformity CE |
| Photometric and lighting design files                                               |                               |
|  | IES file (IES)                |
|  | LDT file (Eulumdat)           |
|  | ULD file (DIALux)             |
|   | ROLF file (RELUX)             |
|  | UGR file (UGR table)          |
|   | LDC typ cone                  |
|   | LDC typ polar                 |
| CAD/BIM files                                                                       |                               |
|   | BIM_Revit_3D                  |


| CAD/BIM files                                                                     |                  |
|-----------------------------------------------------------------------------------|------------------|
|   | CAD_STEP_3D      |
| Tender texts                                                                      |                  |
|  | Tender documents |

LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075440319 | Folding box<br>1             | 52 mm x 622 mm x 694 mm              | 2135.00 g    | 22.45 dm <sup>3</sup> |
| 4058075440326 | Shipping box<br>4            | 640 mm x 220 mm x 710 mm             | 9835.00 g    | 99.97 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

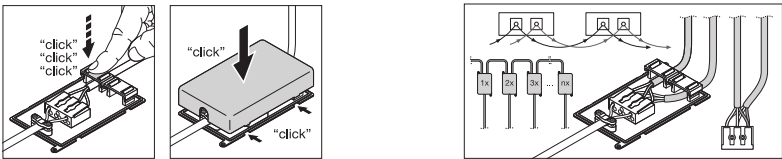

References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.