

# PRODUCT DATASHEET

## TruSys® WW 53 W 4000 K SI DALI

TruSys® WALLWASHER | Luminaire inserts with asymmetrical light distribution

---

### Areas of application

- Direct replacement for luminaires with compact fluorescent lamps
- Discounters, supermarkets



---

### Product benefits

- Innovative optical design with a rod lense-technology over the entire length of the luminaire
- Internal holders prevent the luminaire from falling while being mounted
- Easy electrical and mechanical connection to the mounting rail via snap-in mounting
- Single directional light distribution for lighting and accentuation of walls or advertisements
- Clean look as mounting brackets are not visible when mounted
- Plug-and-play system allows easy installation
- High-value design
- Rows of up to 81 (On-Off) / 91 (DALI) luminaires and an overall length of 124 m (On-Off) / 151 m (DALI) possible
- Energy savings of up to 65 % compared to luminaires with 2 x 80 W T5 lamps
- Version with DALI ECG available

---

### Product features

## Oops! An Error Occurred

**The server returned a "500 Internal Server Error".**

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

- Asymmetric wallwasher light distribution with beam angle 45°
- Luminous efficacy: up to 135 lm/W
- Fixed energy taps for electrical connection
- High-quality aluminum casing
- Type of protection: IP20
- Follows the unified LEDVANCE design language (SCALE design)

choose one

Country

[myLEDVANCE](#)

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

TECHNICAL DATA

Electrical data

|                                          |                       |
|------------------------------------------|-----------------------|
| Nominal wattage                          | 53.00 W               |
| Nominal voltage                          | 220...240 V           |
| Mains frequency                          | 0/50/60 Hz            |
| Nominal current                          | 250 mA                |
| Inrush current                           | 35 A                  |
| Inrush current time T <sub>h50</sub>     | 170 µs                |
| Max. no. of lum. on circuit break. B16 A | 21                    |
| Max. no. of lum. on circuit break. C10 A | 21                    |
| Max. no. of lum. on circuit break. C16 A | 35                    |
| Power factor λ                           | ≥0.95                 |
| Total harmonic distortion                | < 6.1 %               |
| Protection class                         | I                     |
| Operating mode                           | Integrated LED driver |

Photometrical data


|                                              |            |
|----------------------------------------------|------------|
| Luminous flux                                | 6300 lm    |
| Luminous efficacy                            | 120 lm/W   |
| Color temperature                            | 4000 K     |
| Light color (designation)                    | Cool White |
| Color rendering index Ra                     | ≥80        |
| Standard deviation of color matching         | ≤3 sdcm    |
| Low flicker                                  | Yes        |
| Photobiological safety group acc. to EN62778 | RG1        |
| Photobiological safety group acc. to EN62471 | RG1        |
| Beam angle                                   | 45 °       |

choose one Professional


CountryDeutsch  
myLEDVANCE

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

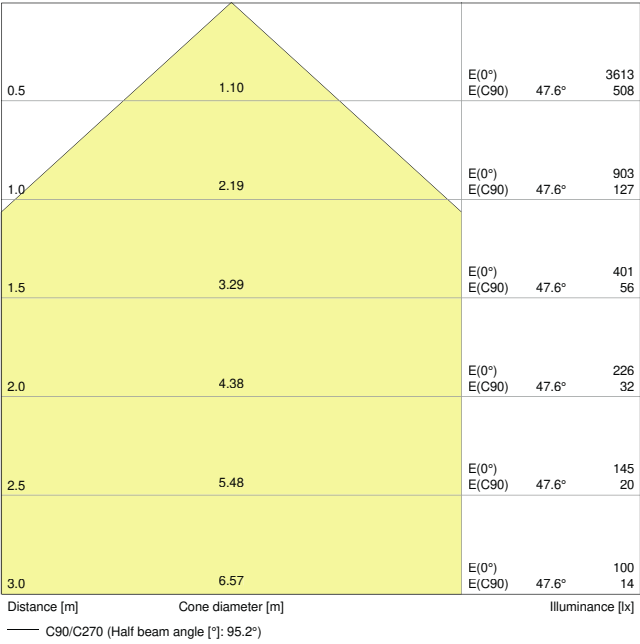


LDC typ cone

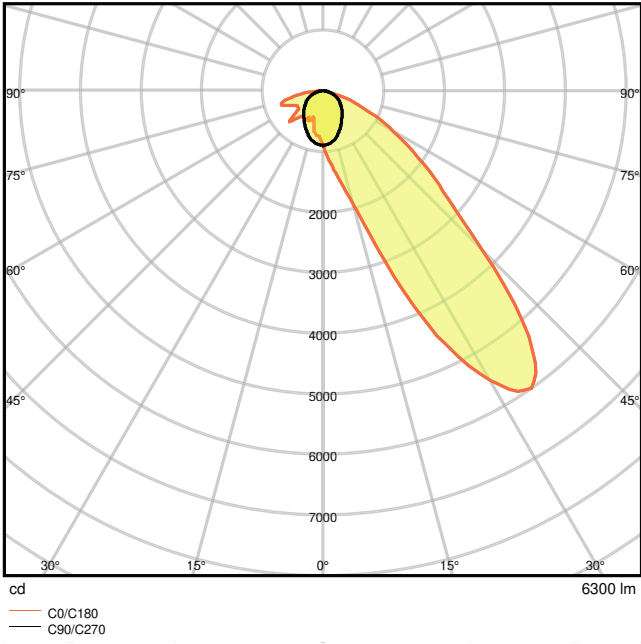

LDC typ polar

Dimensions & Weight

|                |            |
|----------------|------------|
| Length         | 1534.00 mm |
| Width          | 71.00 mm   |
| Height         | 53.00 mm   |
| Product weight | 1800.00 g  |



Materials & Colors

|                |                               |
|----------------|-------------------------------|
| Product color  | Silver                        |
| Housing color  | Silver                        |
| Body material  | Aluminum                      |
| Cover material | Polymethylmethacrylate (PMMA) |

Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

|                                            |        |
|--------------------------------------------|--------|
| Glow Wire Test according to IEC 60695-2-12 | 650 °C |
| Mercury content                            | 0.0 mg |

Application & Mounting

|                                        |                    |
|----------------------------------------|--------------------|
| Ambient temperature range              | -20...+45 °C       |
| Type of connection                     | Plug-In connection |
| Type of protection                     | IP20               |
| Protection class IK (shock resistance) | IK07               |
| Dimmable                               | Yes                |
| Type of dimming                        | DALI               |
| Mounting type                          | Suspended/Surface  |
| Mounting location                      | Mounting rail      |
| Application environment                | Indoor             |
| LED module replaceable                 | Not replaceable    |
| With light source                      | Yes                |

Lifespan

|                            |         |
|----------------------------|---------|
| Lifespan L70/B50 at 25 °C  | 75000 h |
| Lifespan L80/B10 at 25 °C  | 50000 h |
| Lifespan L90/B10 at 25 °C  | 35000 h |
| Number of switching cycles | 100000  |

Certificates & Standards

|                |                                |
|----------------|--------------------------------|
| Standards      | CE / CB / TÜV SÜD / ENEC / EAC |
| Ball shot safe | No                             |

Additional product data

|                       |   |
|-----------------------|---|
| Number of illuminants | - |
|-----------------------|---|

EQUIPMENT / ACCESSORIES

- Mounting rail with fixed integrated 5- (On-Off) / 7-pole (DALI) cable

DOWNLOAD DATA

choose one Professional

CountryDeutsch  
[myLEDVANCE](#)

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

|                                                                                     |                               |
|-------------------------------------------------------------------------------------|-------------------------------|
|     | User instruction              |
|     | Addon Technical Information   |
|     | On-Pack-Info                  |
|     | Declarations Of Conformity CE |
| Photometric and lighting design files                                               |                               |
|    | IES file (IES)                |
|    | LDT file (Eulumdat)           |
|    | ULD file (DIALux)             |
|     | ROLF file (RELUX)             |
|    | LDC typ cone                  |
|   | LDC typ polar                 |
| CAD/BIM files                                                                       |                               |
|   | BIM_Revit_3D                  |
|   | CAD_STEP_3D                   |
| Tender texts                                                                        |                               |
|  | Tender documents              |

LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075102606 | Folding box<br>1             | 58 mm x 1,552 mm x 82 mm             | 1965.00 g    | 7.38 dm <sup>3</sup>  |
| 4058075102613 | Shipping box<br>3            | 1,561 mm x 186 mm x 94 mm            | 7500.00 g    | 27.30 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

choose one 

Professional

Country 

Deutsch

  
[myLEDVANCE](#)

## The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## Oops! An Error Occurred

### The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.