


The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

PRODUCT DATASHEET

ENDURA Garden 18 Dots 3000K

ENDURA GARDEN DOT | Decorative light dots for outdoor use

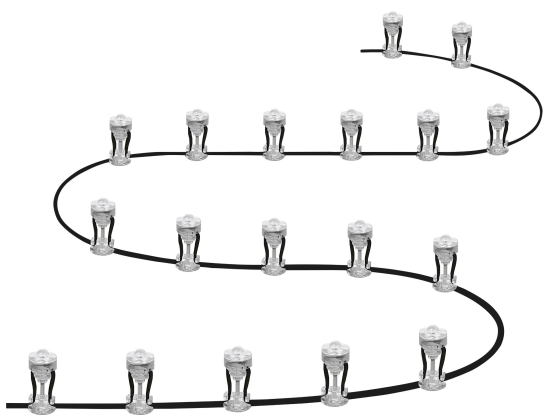

Areas of application

- Gardens, balconies and other outdoor areas

Product benefits

- Easy and quick installation

Product features

- Protection class (dots): IP65
- Protection class (power supply): IP44
- Extension up to maximum 18 dots
- Color temperature: 3,000 K (Warm White)

Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

TECHNICAL DATA

Electrical data

Nominal wattage	12.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Power factor λ	> 0.5
Protection class	II
Operating mode	Mains voltage

Photometrical data

Luminous flux	850 lm
Total luminous flux of contained light sources	1260 lm
Luminous efficacy	57 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥80
Standard deviation of color matching	≤6 sdc _m
Beam angle	33.00 °

Dimensions & Weight

Diameter	23.00 mm
Width	23.00 mm
Height	96.00 mm
Product weight	500.00 g



Materials & Colors

Product color	Clear
Body material	Polycarbonate (PC)
Cover material	Polycarbonate (PC)

Application & Mounting

Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

Ambient temperature range	-20...+40 °C
Type of connection	Plug type C (EU)
Type of protection	IP65
Dimmable	No
Mounting type	Ground spike
Mounting location	Ground
Application environment	Outdoor
LED module replaceable	Not replaceable
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	25000 h
Number of switching cycles	12500

Certificates & Standards

Standards	CE / EAC
-----------	----------



EQUIPMENT / ACCESSORIES

- Power supply included only in basic set
- Complete mounting and connecting accessories included



DOWNLOAD DATA

Documents and certificates	
	User instruction
	Declarations Of Conformity CE



LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075478473	Folding box 1	152 mm x 122 mm x 124 mm	557.00 g	2.30 dm ³
4058075478480	Shipping box 4	327 mm x 267 mm x 150 mm	2600.00 g	13.10 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.