

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

FICHA TÉCNICA DEL PRODUCTO

TruSys® PFM VN 50 W/4000 K

TruSys® PERFORMANCE VERY NARROW | Luminarias con distribución de luz muy estrecha

Áreas de aplicación

- Sustituto directo para luminarias con lámparas fluorescentes
- Salas industriales, almacenes con estanterías altas, garajes y ferreterías



Beneficios del producto

- Distribución de luz muy intensiva para almacenes con estanterías altas.
- Instalación sencilla, no se necesitan herramientas para la conexión
- Ahorradora energéticamente y eficiente en costes
- Aplicación flexible gracias a una amplia gama de paquetes lumínicos y ángulos de apertura
- Posibilidad de iluminación en línea con hasta 57 (encendido/apagado)/ 66 (DALI) luminarias
- Versiones con driver DALI disponibles

Características del producto

- Ángulo de apertura muy intensivo: 30°
- Controle la instalación con pulsadores inteligentes
- Eficacia luminosa: hasta 160 lm/W
- Tomas de luminaria fijos
- Paquete de lúmenes 5600 lm, 8000 lm, 11200 lm
- Carcasa de chapa de acero
- Material de la lente: PMMA

Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

– DESIGN LEDVANCE

– Vida útil (L80 / B10): hasta 60,000 h

Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

INFORMACION TECNICA

DATOS ELÉCTRICOS

Potencia nominal	50,00 W
Tensión nominal	220...240 V
Frecuencia de red	50...60 Hz
Corriente nominal	270 mA
Corriente de encendido IP	30 A
T. corriente entrante T _{h50}	265 µs
Núm. Máx. de luminarias en diferen B16 A	8
Núm. Máx. de luminarias en diferen C10 A	8
Núm. Máx. de luminarias en diferen C16 A	13
Factor de potencia λ	> 0,90
Distorsión armónica total	< 20 %
Clase de protección	I
Modo de funcionamiento	Integrated LED driver

Datos fotométricos

Flujo luminoso	8000 lm
Eficacia luminosa	160 lm/W
Temperatura de color	4000 K
Tono de luz (denominación)	Blanco neutro
Índice de reproducción cromática Ra	≥80
Desviación estándar de ajuste de color	≤3 sdcm
Libre de flickering	Sí
Grupo de seguridad fotobiológica EN62778	RG1
Ángulo de radiación	30 °
UGR longitudinal	21


Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.


The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

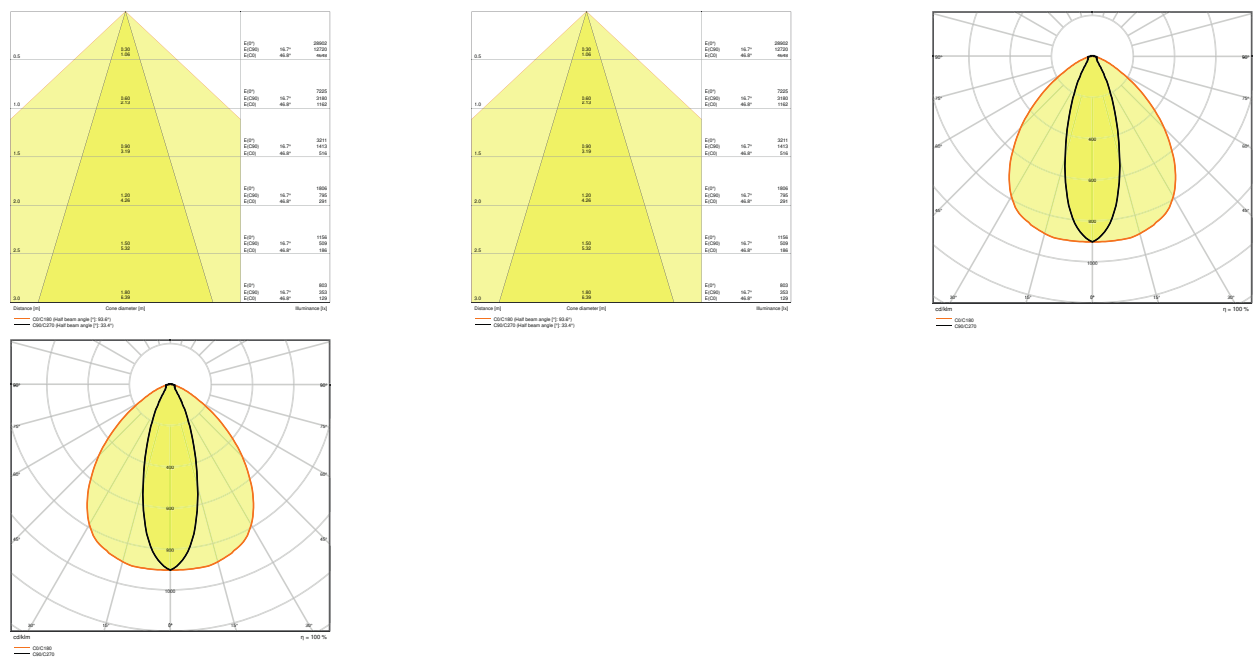

DIMENSIONES Y PESO

Largo	1500.00 mm
Ancho	66.80 mm
Alto	39.40 mm
Peso del producto	1660,00 g



MATERIAL Y COLORES

Color del producto	Blanco
Color de carcasa	Blanco
Material del cuerpo	Steel
Material cobertura	Polymethylmethacrylate (PMMA)
Material de la superficie emisora de luz	PMMA
Test filamento incand. según IEC 60695-2-12	650 °C

Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

APLICACIÓN Y MONTAJE

Margen de temperatura ambiente	-25...+40 °C
Tipo de conexión	Enchufe conectado
Tipo de protección	IP20
Clase protección IK (resistencia g [PIM])	IK04
Regulable	No
Tipo de montaje	En suspensión/En superficie
Ubicación de montaje	Carril de montaje
Entorno de aplicación	Indoor
Módulo LED sustituible	no reemplazable
Con fuente de luz	Sí

Vida media

Duración L70/B50 @ 25 °C	65000 h
Duración L80/B10 @ 25 °C	60000 h
Duración L90/B10 @ 25 °C	50000 h
Número de ciclos de encendidos	100000

EQUIPO DE CONTROL

Flujo de corriente	620 mA
ECE - Flujos de corrientes de rizado	< 20 %

CERTIFICADOS Y ESTÁNDARES

Normas	CE / CB / ENEC / EAC
Seguro contra balonazos	No

DATOS ADICIONALES DEL PRODUCTO

Número de puntos de luz	-
-------------------------	---

Equipamiento / Accesorios

- Carril electrificado con cable integrado de 5 y 8 hilos.

DESCARGAS

choose one Professional

CountryDeutsch
[myLEDVANCE](#)

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

	User instruction
	Addon Technical Information
	Declarations Of Conformity CE
Archivos fotométricos y para diseño de iluminación	
	IES file (IES)
	LDT file (Eulumdat)
	ULD file (DIALux)
	UGR file (UGR table)
	LDC typ cone
	LDC typ polar
Archivos CAD/BIM	
	CAD_STEP_3D
Declaración de conformidad	
	Documentos para oferta

DATOS LOGÍSTICOS

Código de producto	Cantidad por caja (unidad/master)	Dimensiones (longitud x largo x altura)	Peso bruto	Volumen
4058075398757	Caja unitaria 1	108 mm x 1,534 mm x 102 mm	1835.00 g	16.90 dm ³
4058075398764	Embalaje de envío 4	1,547 mm x 218 mm x 231 mm	8133.00 g	77.90 dm ³

El codigo de producto mencionado describe la cantidad minima de unidades que puede ser comprada. Una unidad de transporte puede contener uno o más productos individuales. Cuando se realiza la compra, para las cantidades porfavor ingrese una o varias unidades de envio.

DESCARGO DE RESPONSABILIDAD

Sujeto a cambio sin aviso. Errores y omisiones exceptuadas. Asegurese de utilizar la version más reciente.

Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

Oops! An Error Occurred

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.