

# PRODUCT DATASHEET

## LN INDV D/I 1200 42 W 3000 K

LINEAR IndiviLED® DIRECT/INDIRECT | Pendant luminaire for single luminaire or light line application



### Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, schools
- General indoor illumination
- Corridors, entrance areas
- Seamless linear lighting
- Shop lighting

### Product benefits

- Homogenous light distribution and reduced glare thanks to the IndiviLED® optics
- Increased light comfort thanks to direct and indirect light emission
- The product family offers full lighting solution for different applications
- Energy savings of up to 50 % compared to T5 batten luminaires
- Robust structure with IK06
- Versions with DALI ECG available
- 5 years guarantee

### Product features

- Each LED with individual lens and reflector for UGR < 16 and homogenous light distribution
- Indirect lighting with 850 lm
- Pendant mounting with suspension kit



- Linkable into seamless light line with line connection adapter (surface or pendant mounting)
- Available with length of 1200 or 1500 mm
- Luminous flux up to 6550 lm
- Luminous efficacy: up to 120 lm/W
- Initial color consistency: 3 SDCM
- Glow Wire Test according to IEC 60695-2-12: 850 °C
- Lifetime (L70/B50): 60,000 h (at 25 °C)


---

**TECHNICAL DATA****Electrical data**


|                                          |                       |
|------------------------------------------|-----------------------|
| Nominal wattage                          | 42.00 W               |
| Nominal voltage                          | 220...240 V           |
| Mains frequency                          | 50...60 Hz            |
| Nominal current                          | 230 mA                |
| Inrush current                           | 30 A                  |
| Inrush current time $T_{H50}$            | 100 $\mu$ s           |
| Max. no. of lum. on circuit break. B16 A | 25                    |
| Max. no. of lum. on circuit break. C10 A | 20                    |
| Max. no. of lum. on circuit break. C16 A | 32                    |
| Power factor $\lambda$                   | > 0.90                |
| Total harmonic distortion                | $\leq$ 18 %           |
| Protection class                         | I                     |
| Operating mode                           | Integrated LED driver |

**Photometrical data**

|                                              |            |
|----------------------------------------------|------------|
| Luminous flux                                | 4650 lm    |
| Luminous efficacy                            | 110 lm/W   |
| Color temperature                            | 3000 K     |
| Light color (designation)                    | Warm White |
| Color rendering index Ra                     | $\geq$ 80  |
| Standard deviation of color matching         | 3 sdcn     |
| Low flicker                                  | Yes        |
| Flickering metric (Pst LM)                   | -          |
| Stroboscope effect metric (SVM)              | -          |
| Photobiological safety group acc. to EN62778 | RG1        |
| Photobiological safety group acc. to EN62471 | RG0        |
| Beam angle                                   | 70 °       |
| UGR                                          | < 16       |

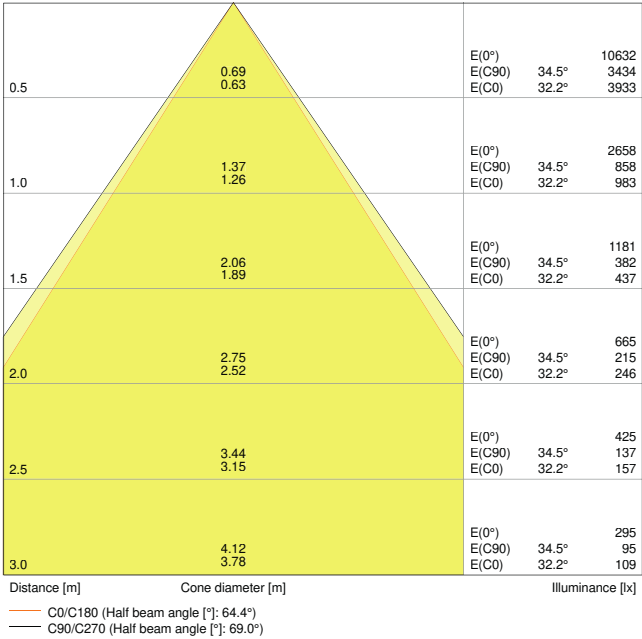


LDC typ cone

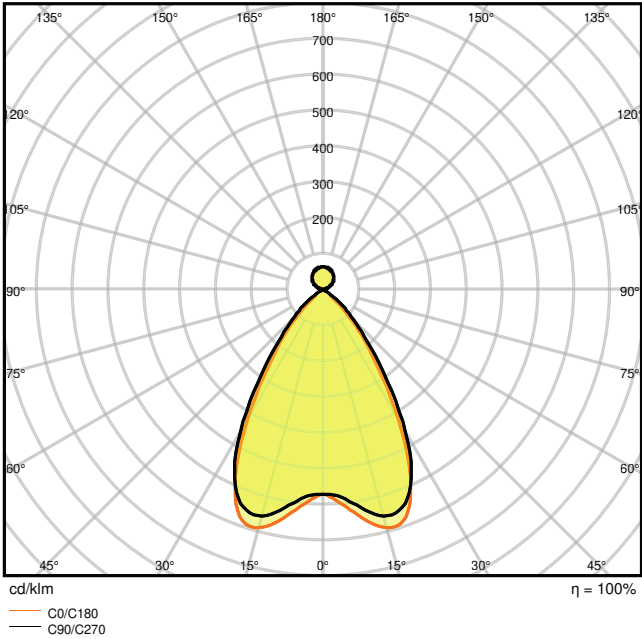

LDC typ polar

Dimensions & Weight

|                |            |
|----------------|------------|
| Length         | 1199.00 mm |
| Width          | 120.00 mm  |
| Height         | 40.00 mm   |
| Product weight | 2600.00 g  |



Materials & Colors

|               |          |
|---------------|----------|
| Product color | White    |
| Housing color | White    |
| Body material | Aluminum |

|                                            |                    |
|--------------------------------------------|--------------------|
| Cover material                             | Aluminum           |
| Light emitting surface material            | Polycarbonate (PC) |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C             |
| Mercury content                            | 0.0 mg             |

### Application & Mounting

|                                        |                    |
|----------------------------------------|--------------------|
| Ambient temperature range              | -20...+45 °C       |
| Type of connection                     | Screwless terminal |
| Type of protection                     | IP20               |
| Protection class IK (shock resistance) | IK06               |
| Dimmable                               | No                 |
| Mounting type                          | Suspended          |
| Mounting location                      | Ceiling            |
| Application environment                | Indoor             |
| LED module replaceable                 | Not replaceable    |
| With light source                      | Yes                |

### Lifespan

|                            |         |
|----------------------------|---------|
| Lifespan L70/B50 at 25 °C  | 60000 h |
| Lifespan L80/B10 at 25 °C  | 50000 h |
| Lifespan L90/B10 at 25 °C  | 35000 h |
| Number of switching cycles | 100000  |

### Certificates & Standards

|                                                      |                         |
|------------------------------------------------------|-------------------------|
| Standards                                            | CE / CB / TÜV SÜD / EAC |
| Luminaire with limited surface temperature, "D sign" | No                      |
| Ball shot safe                                       | No                      |

### Additional product data

|                       |   |
|-----------------------|---|
| Number of illuminants | - |
|-----------------------|---|

### EQUIPMENT / ACCESSORIES

- Ceiling connection box available
- Suspension kit available
- Line connection adapter available
- Through-wiring cable kit available

## DOWNLOAD DATA







| Documents and certificates                                                          |                               |
|-------------------------------------------------------------------------------------|-------------------------------|
|     | User instruction              |
|     | Addon Technical Information   |
|     | On-Pack-Info                  |
|     | Declarations Of Conformity CE |
| Photometric and lighting design files                                               |                               |
|    | IES file (IES)                |
|    | LDT file (Eulumdat)           |
|    | ULD file (DIALux)             |
|   | ROLF file (RELUX)             |
|  | UGR file (UGR table)          |
|   | LDC typ cone                  |
|   | LDC typ polar                 |
| Tender texts                                                                        |                               |
|  | Tender documents              |

## LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075109728 | Folding box<br>1             | 132 mm x 1,334 mm x 52 mm            | 2393.00 g    | 9.16 dm <sup>3</sup>  |
| 4058075109735 | Shipping box<br>4            | 1,357 mm x 207 mm x 169 mm           | 12102.00 g   | 47.47 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## ADDITIONAL CATALOG INFORMATION



## References / Links

- For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.