

# PRODUCT DATASHEET

## ENDURA Classic Tradition 33cm E27 Gold

ENDURA® CLASSIC TRADITION ALU | Timeless lantern shape with aluminum housing



### Areas of application

- Outdoor use (IP44)
- Building facades
- Entrance lighting
- Patios, balconies
- Pathway lighting
- Driveways

### Product benefits

- High flexibility in the choice of the light source thanks to E27 base
- Suitable for smart applications thanks to compatibility with Smart + lamps from LEDVANCE
- Easy and quick installation

### Product features

- Die-cast aluminum housing
- Diffuser made of clear polycarbonate
- Available with and without motion sensor
- Available as wall and bollard luminaires




TECHNICAL DATA

Electrical data

|                  |               |
|------------------|---------------|
| Nominal voltage  | 220...240 V   |
| Mains frequency  | 50...60 Hz    |
| Protection class | I             |
| Operating mode   | Mains voltage |

Dimensions & Weight

|                |           |
|----------------|-----------|
| Length         | 170.00 mm |
| Width          | 170.00 mm |
| Height         | 325.00 mm |
| Product weight | 555.00 g  |

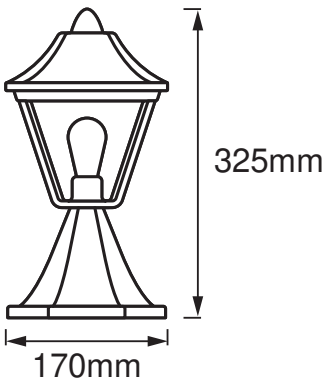

Materials & Colors

|                 |            |
|-----------------|------------|
| Product color   | Black/Gold |
| Housing color   | Black/Gold |
| Body material   | Aluminum   |
| Mercury content | 0.0 mg     |

Application & Mounting

|                              |                |
|------------------------------|----------------|
| Ambient temperature range    | -20...+40 °C   |
| Temperature range at storage | -20...+85 °C   |
| Type of connection           | Screw terminal |
| Type of protection           | IP44           |

|                         |          |
|-------------------------|----------|
| Dimmable                | No       |
| Mounting type           | Standing |
| Mounting location       | Floor    |
| Application environment | Outdoor  |
| With light source       | No       |
| Holder designation      | E27      |

### Certificates & Standards

|           |                 |
|-----------|-----------------|
| Standards | CE / EAC / UKCA |
|-----------|-----------------|

### Additional product data

|                       |                            |
|-----------------------|----------------------------|
| Product remark        | Maximum bulb wattage: 60 W |
| Number of illuminants | 1                          |

### EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included
- No light sources included

### DOWNLOAD DATA

| Documents and certificates                                                         |                               |
|------------------------------------------------------------------------------------|-------------------------------|
|  | User instruction              |
|  | Packaging insert              |
|  | Declarations Of Conformity CE |

### LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075206342 | Folding box<br>1             | 194 mm x 194 mm x 346 mm             | 622.00 g     | 13.02 dm <sup>3</sup> |
| 4058075206359 | Shipping box<br>4            | 403 mm x 403 mm x 365 mm             | 3238.00 g    | 59.28 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.