



Sample image

Datasheet

Article number: 70005788

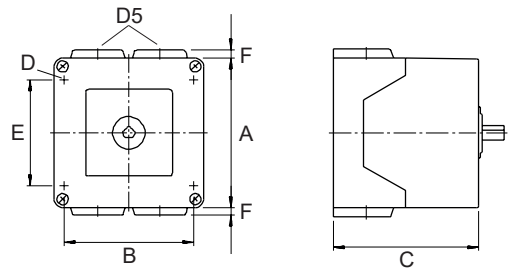
Designation: CA20.A410.PF1

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
690 AC / DC						
Rated uninterrupted current Iu/Ith						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements			
25	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C			
Rated operational current Ie						
Utilization category			Voltage (V)	Current (A)		
AC-15			220 - 240	8		
AC-15			380 - 440	5		
Rated operational power						
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)		
AC-3	220 - 240	3	3	4		
AC-3	380 - 440	3	3	7,50		
AC-3	660 - 690	3	3	7,50		
AC-3	220 - 240	1	2	3		
AC-3	380 - 440	1	2	3,70		
AC-23A	220 - 240	3	3	5,50		
AC-23A	380 - 440	3	3	11		
AC-23A	660 - 690	3	3	11		
AC-23A	220 - 240	1	2	3		
AC-23A	380 - 440	1	2	5,50		
Max Fuse Rating IEC						
Fuse characteristic		No. of Fuses		Current (A)		
gG		1		35		
UL60947-4-1 , UL508						
Nominal Voltage						
Voltage (V) AC / DC						
600 AC						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
600 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C) Additional Text				
30		0 - 40 --				
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
Reversing		110 - 120	1	2	0,33	40
Reversing		220 - 240	1	2	0,75	40
Reversing		277 - 277	1	2	1	40
Reversing		415 - 415	1	2	1,50	40
Reversing		440 - 480	1	2	2	40
Reversing		550 - 600	1	2	2	40
Reversing		110 - 120	3	3	1	40
Reversing		220 - 240	3	3	2	40
Reversing		415 - 415	3	3	3	40
Reversing		440 - 480	3	3	5	40
Reversing		550 - 600	3	3	5	40
DOL		110 - 120	1	2	1,50	40
DOL		220 - 240	1	2	3	40
DOL		277 - 277	1	2	3	40
DOL		415 - 415	1	2	3	40
DOL		440 - 480	1	2	5	40
DOL		550 - 600	1	2	5	40
DOL		110 - 120	3	3	3	40
DOL		220 - 240	3	3	7,50	40
DOL		415 - 415	3	3	7,50	40
DOL		440 - 480	3	3	10	40

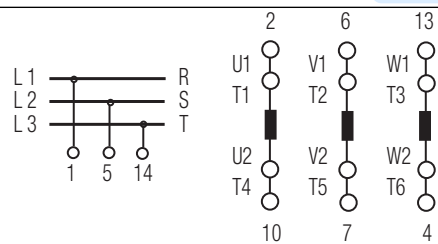
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		550 - 600	3	3	10	40
Pilot duty rating code						
Duty Code						
A600						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnect are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
75			– Use copper wire only			
Connecting instructions						
Markings						
When intended for use as a motor disconnect the device shall be provided with a method of being locked in the OFF-position.						
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	600	30	1	2	1	
AC	600	30	3	3	1	
CSA						
Nominal Voltage						
		Voltage (V) AC / DC				
		600 AC				
Rated insulation voltage Ui						
		Voltage (V) AC / DC				
		600 AC				
Rated thermal current						
Current (A)			Ambient temperature (°C) Additional Text			
30			0 - 40 –			
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	1,50	40
DOL		220 - 240	1	2	3	40
DOL		277 - 277	1	2	3	40
DOL		415 - 415	1	2	5	40
DOL		440 - 480	1	2	5	40
DOL		550 - 600	1	2	5	40
DOL		110 - 120	3	3	3	40
DOL		220 - 240	3	3	7,50	40
DOL		415 - 415	3	3	10	40
DOL		440 - 480	3	3	10	40
DOL		550 - 600	3	3	10	40
Pilot duty rating code						
Duty Code						
A600						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
75			– only			
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	600	30	1	1	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			1		9	
Stripping length						
			Length (mm) –			
			9 STRIPPINGLENGTH			
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)		Material of the wire
solid wire	Min.	1		0.75mm²		Copper
solid wire	Min.	2		0.75mm²		Copper
flexible wire	Min.	1		1.5mm²		Copper
flexible wire	Max.	2		AWG 12		Copper
flexible wire	Max.	2		4mm²		Copper
flexible wire	Min.	2		1.5mm²		Copper
Single-core or stranded wire	Max.	2		AWG 10		Copper
Single-core or stranded wire	Max.	2		4mm²		Copper
flexible wire with ferrule according to DIN 46228	Min.	1		1mm²		Copper
flexible wire with ferrule according to DIN 46228	Max.	2		2.5mm²		Copper
flexible wire with ferrule according to DIN 46228	Min.	2		1mm²		Copper
Approbations						
Specification						Marking
EAC						

Approbations		Marking
Specification		
CE marking		
UK Directives		
CSA C.22.2 No.14		
GB/T14048.3		
Recommended screw driver		
Type of screw driver	Value	
Cross Screwdriver	PH1	
Slot screwdriver according to DIN 5264	0,8x5,5	
General Information		
Text		
- Do not lubricate or treat contacts. - Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology. - Use copper wire only. Do not coat the wire end with tin. - Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications. - After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.		
Waste Electrical & Electronic Equipment (WEEE)		
Picture name	Description	
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com	
Proposition 65		
Picture name	Description	
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .	
Classification Contact: Rigid contact bridge		
Classification Contact Mat: Silver		
Classification Terminal: Screw terminal		

Mounting-PF1			
			
IP - Code front side		IP65	
Stages		3,00 - 4,00	
A	□	82,00 mm	
B	H	68,00 mm	
C	H	90,10 mm	
D	Ø	4,40 mm	
D5	Ø	4,00 x M20	
E	H	52,00 mm	
F	H	5,00 mm	


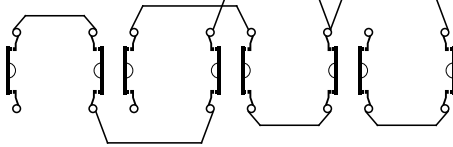
Wiring diagram

CA20.A410.PF1



Switch program

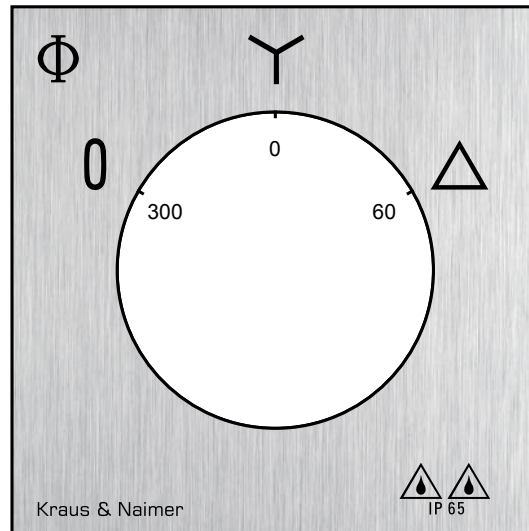
CA20.A410.PF1

 Kraus & Naimer		CA20		A410		Page 1 of 1							
Face Plate													
		1	3	5	7	9	11	13	15	17	19	21	23
													
Switching Angle 60 Total switching Angle 120		2	4	6	8	10	12	14	16	18	20	22	24
0													
315													
330													
345													
Y													
0													
15													
30													
45													
Δ													
60													
75													
90													
105													
120													
135													
150													
165													
180													
195													
210													
225													
240													
255													
270													
285													

Version: 55

Face plate

S1.F080/A10.PFL



HANDLES

Designation: S1B.G257

Handle colour: "7" electro grey

