



Sample image

## Datasheet

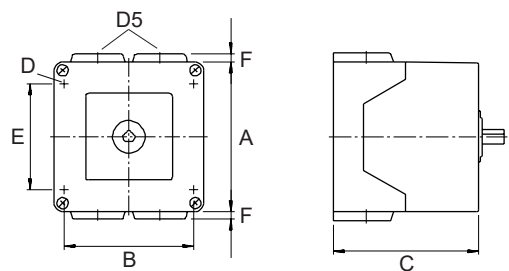
Article number: 70025279

Description: Other Component

|                                           |           |              |                                    |             |                          |
|-------------------------------------------|-----------|--------------|------------------------------------|-------------|--------------------------|
| IEC 60947-3 EN 60947-3, VDE 0660 Teil 107 |           |              |                                    |             |                          |
| 定格絶縁電圧 Ui                                 |           |              |                                    |             |                          |
| 電圧 (V) AC / DC                            |           |              |                                    |             |                          |
| 690 AC / DC                               |           |              |                                    |             |                          |
| 定格連続通電電流 Iu/Ith                           |           |              |                                    |             |                          |
| Current (A)                               | 周囲温度 (°C) | ピーク温度 (°C)   | 追加要求事項                             |             |                          |
| 20                                        | 55        | 60           | 周囲温度 +55°C、24 時間、ただし 瞬時ピーク温度 +60°C |             |                          |
| 定格操作電流 Ie                                 |           |              |                                    |             |                          |
| 負荷種別                                      | 電圧 (V)    |              |                                    | Current (A) |                          |
| AC-15                                     | 220 - 240 |              |                                    | 6           |                          |
| AC-15                                     | 380 - 440 |              |                                    | 4           |                          |
| 定格操作電力                                    |           |              |                                    |             |                          |
| 負荷種別                                      | 電圧 (V)    | 相数           | 極数                                 | 電力 (kW)     |                          |
| AC-3                                      | 220 - 240 | 3            | 3                                  | 3           |                          |
| AC-3                                      | 380 - 440 | 3            | 3                                  | 5,50        |                          |
| AC-3                                      | 660 - 690 | 3            | 3                                  | 5,50        |                          |
| AC-3                                      | 220 - 240 | 1            | 2                                  | 2,20        |                          |
| AC-3                                      | 380 - 440 | 1            | 2                                  | 3           |                          |
| AC-23A                                    | 220 - 240 | 3            | 3                                  | 3,70        |                          |
| AC-23A                                    | 380 - 440 | 3            | 3                                  | 7,50        |                          |
| AC-23A                                    | 660 - 690 | 3            | 3                                  | 7,50        |                          |
| AC-23A                                    | 220 - 240 | 1            | 2                                  | 2,50        |                          |
| AC-23A                                    | 380 - 440 | 1            | 2                                  | 3,70        |                          |
| 最大ヒューズ定格 IEC                              |           |              |                                    |             |                          |
| ヒューズ特性                                    | ヒューズ数     |              |                                    | Current (A) |                          |
| gG                                        | 1         |              |                                    | 25          |                          |
| UL60947-4-1, UL508                        |           |              |                                    |             |                          |
| Nominal Voltage                           |           |              |                                    |             |                          |
| 電圧 (V) AC / DC                            |           |              |                                    |             |                          |
| 600 AC                                    |           |              |                                    |             |                          |
| 定格絶縁電圧 Ui                                 |           |              |                                    |             |                          |
| 電圧 (V) AC / DC                            |           |              |                                    |             |                          |
| 600 AC                                    |           |              |                                    |             |                          |
| 定格熱電流                                     |           |              |                                    |             |                          |
| Current (A)                               |           | 周囲温度 (°C) 備考 |                                    |             |                          |
| 20                                        |           | 0 - 40 --    |                                    |             |                          |
| Horsepower rating                         |           |              |                                    |             |                          |
| Across-the-Line Motor Starting            | 電圧 (V)    | 相数           | 極数                                 | Power (HP)  | Ambient temperature [°C] |
| Reversing                                 | 110 - 120 | 1            | 2                                  | 0,17        | 40                       |
| Reversing                                 | 220 - 240 | 1            | 2                                  | 0,50        | 40                       |
| Reversing                                 | 277 - 277 | 1            | 2                                  | 0,60        | 40                       |
| Reversing                                 | 415 - 415 | 1            | 2                                  | 1           | 40                       |
| Reversing                                 | 440 - 480 | 1            | 2                                  | 1,50        | 40                       |
| Reversing                                 | 550 - 600 | 1            | 2                                  | 1,50        | 40                       |
| Reversing                                 | 110 - 120 | 3            | 3                                  | 0,50        | 40                       |
| Reversing                                 | 220 - 240 | 3            | 3                                  | 1           | 40                       |
| Reversing                                 | 415 - 415 | 3            | 3                                  | 2           | 40                       |
| Reversing                                 | 440 - 480 | 3            | 3                                  | 3           | 40                       |
| Reversing                                 | 550 - 600 | 3            | 3                                  | 3           | 40                       |
| DOL                                       | 110 - 120 | 1            | 2                                  | 0,50        | 40                       |
| DOL                                       | 220 - 240 | 1            | 2                                  | 1           | 40                       |
| DOL                                       | 277 - 277 | 1            | 2                                  | 2           | 40                       |
| DOL                                       | 440 - 480 | 1            | 2                                  | 2           | 40                       |
| DOL                                       | 550 - 600 | 1            | 2                                  | 2           | 40                       |
| DOL                                       | 110 - 120 | 3            | 3                                  | 1,50        | 40                       |
| DOL                                       | 220 - 240 | 3            | 3                                  | 3           | 40                       |
| DOL                                       | 415 - 415 | 3            | 3                                  | 5           | 40                       |
| DOL                                       | 440 - 480 | 3            | 3                                  | 5           | 40                       |
| DOL                                       | 550 - 600 | 3            | 3                                  | 5           | 40                       |

|                                                                                                                                                                                                                                                                                                                                                                                                          |           |             |                         |                          |                           |                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------|-------------------------|--------------------------|---------------------------|--------------------------|
| Pilot duty rating code                                                                                                                                                                                                                                                                                                                                                                                   |           |             |                         |                          |                           |                          |
| Duty Code                                                                                                                                                                                                                                                                                                                                                                                                |           |             |                         |                          |                           |                          |
| A600                                                                                                                                                                                                                                                                                                                                                                                                     |           |             |                         |                          |                           |                          |
| SCCR / Max. fuse rating                                                                                                                                                                                                                                                                                                                                                                                  |           |             |                         |                          |                           |                          |
| Conditions of acceptability                                                                                                                                                                                                                                                                                                                                                                              |           |             |                         |                          |                           |                          |
| These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnecter are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses. |           |             |                         |                          |                           |                          |
| Temp. rating of wire                                                                                                                                                                                                                                                                                                                                                                                     |           |             |                         |                          |                           |                          |
| Temperature rating (°C)                                                                                                                                                                                                                                                                                                                                                                                  |           |             | Current (A) Text        |                          |                           |                          |
| 60 - 75                                                                                                                                                                                                                                                                                                                                                                                                  |           |             | -- Use copper wire only |                          |                           |                          |
| Connecting instructions                                                                                                                                                                                                                                                                                                                                                                                  |           |             |                         |                          |                           |                          |
| Markings                                                                                                                                                                                                                                                                                                                                                                                                 |           |             |                         |                          |                           |                          |
| モータ断路器として使用する場合は、装置にはOFF位置でロックする方法を設けなければならない。                                                                                                                                                                                                                                                                                                                                                           |           |             |                         |                          |                           |                          |
| General Use                                                                                                                                                                                                                                                                                                                                                                                              |           |             |                         |                          |                           |                          |
| AC / DC                                                                                                                                                                                                                                                                                                                                                                                                  | 電圧 (V)    | Current (A) | 相数                      | 極数                       | No. of contacts in series |                          |
| AC                                                                                                                                                                                                                                                                                                                                                                                                       | 600       | 20          | 1                       | 2                        | 1                         |                          |
| AC                                                                                                                                                                                                                                                                                                                                                                                                       | 600       | 20          | 3                       | 3                        | 1                         |                          |
| CSA                                                                                                                                                                                                                                                                                                                                                                                                      |           |             |                         |                          |                           |                          |
| Nominal Voltage                                                                                                                                                                                                                                                                                                                                                                                          |           |             |                         |                          |                           |                          |
|                                                                                                                                                                                                                                                                                                                                                                                                          |           |             | 電圧 (V) AC / DC          |                          |                           |                          |
|                                                                                                                                                                                                                                                                                                                                                                                                          |           |             | 600 AC                  |                          |                           |                          |
| 定格絶縁電圧 Ui                                                                                                                                                                                                                                                                                                                                                                                                |           |             |                         |                          |                           |                          |
|                                                                                                                                                                                                                                                                                                                                                                                                          |           |             | 電圧 (V) AC / DC          |                          |                           |                          |
|                                                                                                                                                                                                                                                                                                                                                                                                          |           |             | 600 AC                  |                          |                           |                          |
| 定格熱電流                                                                                                                                                                                                                                                                                                                                                                                                    |           |             |                         |                          |                           |                          |
| Current (A)                                                                                                                                                                                                                                                                                                                                                                                              |           |             | 周囲温度 (°C) 備考            |                          |                           |                          |
| 20                                                                                                                                                                                                                                                                                                                                                                                                       |           |             | 0 - 40 --               |                          |                           |                          |
| Horsepower rating                                                                                                                                                                                                                                                                                                                                                                                        |           |             |                         |                          |                           |                          |
| Across-the-Line Motor Starting                                                                                                                                                                                                                                                                                                                                                                           |           | 電圧 (V)      | 相数                      | 極数                       | Power (HP)                | Ambient temperature [°C] |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |           | 110 - 120   | 1                       | 2                        | 0,50                      | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |           | 220 - 240   | 1                       | 2                        | 1                         | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |           | 277 - 277   | 1                       | 2                        | 2                         | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |           | 415 - 415   | 1                       | 2                        | 2                         | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |           | 440 - 480   | 1                       | 2                        | 2                         | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |           | 550 - 600   | 1                       | 2                        | 2                         | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |           | 110 - 120   | 3                       | 3                        | 1,50                      | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |           | 220 - 240   | 3                       | 3                        | 3                         | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |           | 415 - 415   | 3                       | 3                        | 5                         | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |           | 440 - 480   | 3                       | 3                        | 5                         | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |           | 550 - 600   | 3                       | 3                        | 5                         | 40                       |
| Pilot duty rating code                                                                                                                                                                                                                                                                                                                                                                                   |           |             |                         |                          |                           |                          |
| Duty Code                                                                                                                                                                                                                                                                                                                                                                                                |           |             |                         |                          |                           |                          |
| A600                                                                                                                                                                                                                                                                                                                                                                                                     |           |             |                         |                          |                           |                          |
| Temp. rating of wire                                                                                                                                                                                                                                                                                                                                                                                     |           |             |                         |                          |                           |                          |
| Temperature rating (°C)                                                                                                                                                                                                                                                                                                                                                                                  |           |             | Current (A) Text        |                          |                           |                          |
| 75                                                                                                                                                                                                                                                                                                                                                                                                       |           |             | -- only                 |                          |                           |                          |
| General Use                                                                                                                                                                                                                                                                                                                                                                                              |           |             |                         |                          |                           |                          |
| AC / DC                                                                                                                                                                                                                                                                                                                                                                                                  | 電圧 (V)    | Current (A) | 相数                      | 極数                       | No. of contacts in series |                          |
| AC                                                                                                                                                                                                                                                                                                                                                                                                       | 600       | 20          | 1                       | 1                        | 1                         |                          |
| GENERAL TECHNICAL INFORMATION                                                                                                                                                                                                                                                                                                                                                                            |           |             |                         |                          |                           |                          |
| 端子ネジ締付トルク                                                                                                                                                                                                                                                                                                                                                                                                |           |             |                         |                          |                           |                          |
|                                                                                                                                                                                                                                                                                                                                                                                                          |           |             | 締付トルク (Nm)              |                          | 締付トルク (lb-in)             |                          |
|                                                                                                                                                                                                                                                                                                                                                                                                          |           |             | 0,60                    |                          | 5                         |                          |
| Stripping length                                                                                                                                                                                                                                                                                                                                                                                         |           |             |                         |                          |                           |                          |
|                                                                                                                                                                                                                                                                                                                                                                                                          |           |             | Length (mm) --          |                          |                           |                          |
|                                                                                                                                                                                                                                                                                                                                                                                                          |           |             | 8 STRIPPINGLENGTH       |                          |                           |                          |
| 電線サイズ                                                                                                                                                                                                                                                                                                                                                                                                    |           |             |                         |                          |                           |                          |
| 電線種別                                                                                                                                                                                                                                                                                                                                                                                                     | 最小値 / 最大値 |             | 1端子当たりの配線数              | 断面積 (mm²) or (AWG/kcmil) | 電線材料                      |                          |
| 単線                                                                                                                                                                                                                                                                                                                                                                                                       | 最小        |             | 1                       | 0.5mm²                   | 銅                         |                          |
| 単線                                                                                                                                                                                                                                                                                                                                                                                                       | 最小        |             | 2                       | 0.5mm²                   | 銅                         |                          |
| 細撚線                                                                                                                                                                                                                                                                                                                                                                                                      | 最小        |             | 1                       | 0.75mm²                  | 銅                         |                          |
| 細撚線                                                                                                                                                                                                                                                                                                                                                                                                      | 最小        |             | 2                       | 0.75mm²                  | 銅                         |                          |
| 細撚線                                                                                                                                                                                                                                                                                                                                                                                                      | 最大        |             | 2                       | 2.5mm²                   | 銅                         |                          |
| 細撚線                                                                                                                                                                                                                                                                                                                                                                                                      | 最大        |             | 2                       | AWG 14                   | 銅                         |                          |
| 単線または荒撚線                                                                                                                                                                                                                                                                                                                                                                                                 | 最大        |             | 2                       | AWG 12                   | 銅                         |                          |
| 単線または荒撚線                                                                                                                                                                                                                                                                                                                                                                                                 | 最大        |             | 2                       | 2.5mm²                   | 銅                         |                          |
| DIN46228規格フェール適用の細撚線                                                                                                                                                                                                                                                                                                                                                                                     | 最小        |             | 1                       | 0.5mm²                   | 銅                         |                          |
| DIN46228規格フェール適用の細撚線                                                                                                                                                                                                                                                                                                                                                                                     | 最大        |             | 2                       | 2.5mm²                   | 銅                         |                          |
| DIN46228規格フェール適用の細撚線                                                                                                                                                                                                                                                                                                                                                                                     | 最小        |             | 2                       | 0.5mm²                   | 銅                         |                          |
| 認証                                                                                                                                                                                                                                                                                                                                                                                                       |           |             |                         |                          |                           |                          |
| 仕様                                                                                                                                                                                                                                                                                                                                                                                                       |           |             | マーキング                   |                          |                           |                          |
| EAC                                                                                                                                                                                                                                                                                                                                                                                                      |           |             | EAC                     |                          |                           |                          |
| CEマーキング                                                                                                                                                                                                                                                                                                                                                                                                  |           |             | CE                      |                          |                           |                          |
| UK Directives                                                                                                                                                                                                                                                                                                                                                                                            |           |             | UK<br>CA                |                          |                           |                          |

|                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 認証                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                    | マーキング                                                                               |
| 仕様                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                    |  |
| CSA C.22.2 No.14                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                     |
| Recommended screw driver                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                     |
| Type of screw driver                                                                                                                                                                                                                                                                                                                                                                      | Value                                                                                                                                                                                                                                                                                                                                                                              |                                                                                     |
| Cross Screwdriver                                                                                                                                                                                                                                                                                                                                                                         | PH1                                                                                                                                                                                                                                                                                                                                                                                |                                                                                     |
| Slot screwdriver according to DIN 5264                                                                                                                                                                                                                                                                                                                                                    | 0,8x4                                                                                                                                                                                                                                                                                                                                                                              |                                                                                     |
| 注意事項                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                     |
| 備考                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                     |
| <ul style="list-style-type: none"> <li>- 接点に潤滑剤を塗布したり、表面処理をしたりしないでください。</li> <li>- スイッチの取り付け、接続、操作の設定は、技術的に認められた規則に従って、有資格者のみが行うことができます。</li> <li>- 銅線のみを使用してください。電線を半田付けしないでください。</li> <li>- ジャンパー線(コモン線)に接続された端子ネジは工場出荷時には仮締め状態となっています。ジャンパー線(コモン線)に接続された端子ネジの締め付けを含む全ての端子ネジが、必ず適切なトルクで締められていることをご確認の上、ご使用ください。</li> <li>- スイッチの設置後、端子間の間隔は、適用される規格の要件を満たすのに十分なものでなければなりません。</li> </ul> |                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                     |
| Waste Electrical & Electronic Equipment (WEEE)                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                     |
| Picture name                                                                                                                                                                                                                                                                                                                                                                              | Description                                                                                                                                                                                                                                                                                                                                                                        |                                                                                     |
|                                                                                                                                                                                                                                                                                                           | Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at <a href="http://www.krausnaimer.com">www.krausnaimer.com</a> |                                                                                     |
| Proposition 65                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                     |
| Picture name                                                                                                                                                                                                                                                                                                                                                                              | Description                                                                                                                                                                                                                                                                                                                                                                        |                                                                                     |
|                                                                                                                                                                                                                                                                                                           | WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .                                                                                                                                            |                                                                                     |
| Classification Contact: Rigid contact bridge                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                     |
| Classification Contact Mat: Silver                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                     |
| Classification Terminal: Screw terminal                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                     |

|                                                                                     |              |
|-------------------------------------------------------------------------------------|--------------|
| Mounting-PF1                                                                        |              |
|  |              |
| IP - Code front side                                                                | IP65         |
| Stages                                                                              | 1,00 - 2,00  |
| A                                                                                   | □ 82,00 mm   |
| B                                                                                   | H 68,00 mm   |
| C                                                                                   | H 64,70 mm   |
| D                                                                                   | Ø 4,40 mm    |
| D5                                                                                  | Ø 4,00 x M20 |
| E                                                                                   | H 52,00 mm   |
| F                                                                                   | H 5,00 mm    |



Wiring diagram

CA11.A293.PF1



## Switch program

CA11.A293.PF1

|  Kraus & Naimer         |  | CA11                                                                              |   | A293 |   | Page 1 of 1 |    |    |    |    |    |    |    |
|----------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------|---|------|---|-------------|----|----|----|----|----|----|----|
|                                                                                                          |  |                                                                                   |   |      |   |             |    |    |    |    |    |    |    |
| <b>Face Plate</b>                                                                                        |  |                                                                                   |   |      |   |             |    |    |    |    |    |    |    |
|                         |  | 1                                                                                 | 3 | 5    | 7 | 9           | 11 | 13 | 15 | 17 | 19 | 21 | 23 |
|                                                                                                          |  |  |   |      |   |             |    |    |    |    |    |    |    |
| Switching Angle <input type="text" value="90"/><br>Total switching Angle <input type="text" value="90"/> |  | 2                                                                                 | 4 | 6    | 8 | 10          | 12 | 14 | 16 | 18 | 20 | 22 | 24 |
| 0                                                                                                        |  | 270                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 285                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 300                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 315                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 330                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 345                                                                               |   |      |   |             |    |    |    |    |    |    |    |
| 1                                                                                                        |  | 0                                                                                 |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 15                                                                                |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 30                                                                                |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 45                                                                                |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 60                                                                                |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 75                                                                                |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 90                                                                                |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 105                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 120                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 135                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 150                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 165                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 180                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 195                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 210                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 225                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 240                                                                               |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                          |  | 255                                                                               |   |      |   |             |    |    |    |    |    |    |    |

Version: 87

## Face plate

S1.F456/C10.V11H





Sample image

## PADLOCK DEVICE with F-handle ring

Designation: S1.V840G/A71/C1

Colour of F-handle ring: "A" black

Colour of face ring: "7" electro-grey

Locking position: "1" at 09:00 (1x90°)

Type of mounting: "C" for type of mounting PN, PF, PFA-PFF

Switch type: "1" for C-switches and for KG10.

