



Slim Panel Performer UGR19 G6


- High quality LED Slim Panel, suitable for offices (UGR19)
- Standard IP54 (front side)
- Recessed, suspended and surface mounting possible



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Colour rendering index (CRI)	Weight (kg/pc)
Wieland2, Smart								
542003115700	LEDPanelS-P6 Sq595-30W-BLE2-830-U19-WL	TL 4x18W	30	3900	130	3000	> 80	1.98

Accessories

Surface Mounting Frame		Recessed Mounting Frame			
	140055484 LEDPanelRc-SI Sq600-Surface-Module-WH-CT		542098017600 LEDPanelRc2 Sq600-Surface-Kit-WH		542098009600 LEDPanelRc Sq600-Frame-WH
					542098045500 LEDPanelS-P Suspension-Kit-G6
					542098000800 LEDPanelRC-SI U19 EM-kit 1h
					542098000900 LEDPanelRC-SI U19 EM-kit 3h
					140060852 LEDFixture-Ceiling-Cable-Kit-0.5m
	542098030700 Junction-Box-WH				

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
542003115700	LEDPanelS-P6 Sq595-30W-BLE2-830-U19-WL	94051190	631x41x673	2.56	6931783000182	1
140055484	LEDPanelRc-SI Sq600-Surface-Module-WH-CT	94059900	690x690x118	4.26	6956321879808	1
140060852	LEDFixture-Ceiling-Cable-Kit-0.5m	73121020	100x100x5	0.40	6956321895266	1
542003021800	LEDPanelRc-S-B2 Mounting-Springs	73209090	280x200x170	0.10	6941408821672	1
542098000800	LEDPanelRC-SI U19 EM-kit 1h	85044083	490x390x150	0.98	6941497702340	1
542098000900	LEDPanelRC-SI U19 EM-kit 3h	85044083	490x390x150	1.08	6941497702333	1
542098009600	LEDPanelRc Sq600-Frame-WH	94059900	688x88x694	1.79	6941497704061	1
542098017600	LEDPanelRc2 Sq600-Surface-Kit-WH	94059900	685x77x68	1.53	6941497720696	1
542098030700	Junction-Box-WH	85369010	43x103.4x26	0.06	6941408868684	1
542098045500	LEDPanelS-P Suspension-Kit-G6	73121020	130x130x30	0.22	6941497784773	1
560098000600	LEDSmart-Sensor Surface-Module-WH	94059200	330x220x255	0.15	6941497703972	1
821006001800	LEDSmart-BLE2-Rc-MW-Sensor	85365005	100x100x130	0.19	6941497778277	1
821006002000	LEDSmart-BLE2-Rc-PIR-Sensor	85365005	100x100x70	0.19	6941497778260	1
821009000200	LEDSmart-BLE2-Switch	85365005	89x21x101	0.10	6941497778253	1
821011002600	LEDSmart-BLE2-DALI-Connect-Box	85176200	100x60x105	0.30	6941497778291	1
821017003400	LEDSmart-BLE2-Multi-Switch-Module	94059200	46x46x30	0.07	6931783007600	1
821017003800	LEDSmart-BLE2-Relay-1000W	85364900	110x57x37	0.10	6941497778284	1


Technical Specifications		Electrical Supply	
Lifetime (L70)	100,000 h	Frequency	50/60 Hz
Lifetime (L80)	70,000 h	Nominal voltage	220-240 V
Lifetime (L90)	50,000 h	DC input voltage	See catalogue appendix
On-/Off-cycles	100,000	Connection	Specifications
Colour consistency (SDCM)	3	230V Cable length	0.3 m
Dimmability	BLE2		
Beam angle	90°		
Finishing	White RAL9003		
UGR	≤ 19		
IP front side	IP54		
IP recessed part	IP20		
Impact strength	IK03		
Protection class	II		
Risk group (EN 62471)	RG0		
With control gear	Yes		
Glow wire test	650°C		
Power factor	≥ 0.9		

Mechanical Properties	
Housing material	Aluminum
Optical material	PMMA
Cover material	Polystyrene (PS)

Ambient Conditions	
Operating temperature	-10-+45°C
Application temperature	+25°C
Storage environment	-20-+50°C



Dimensional Drawing (mm)

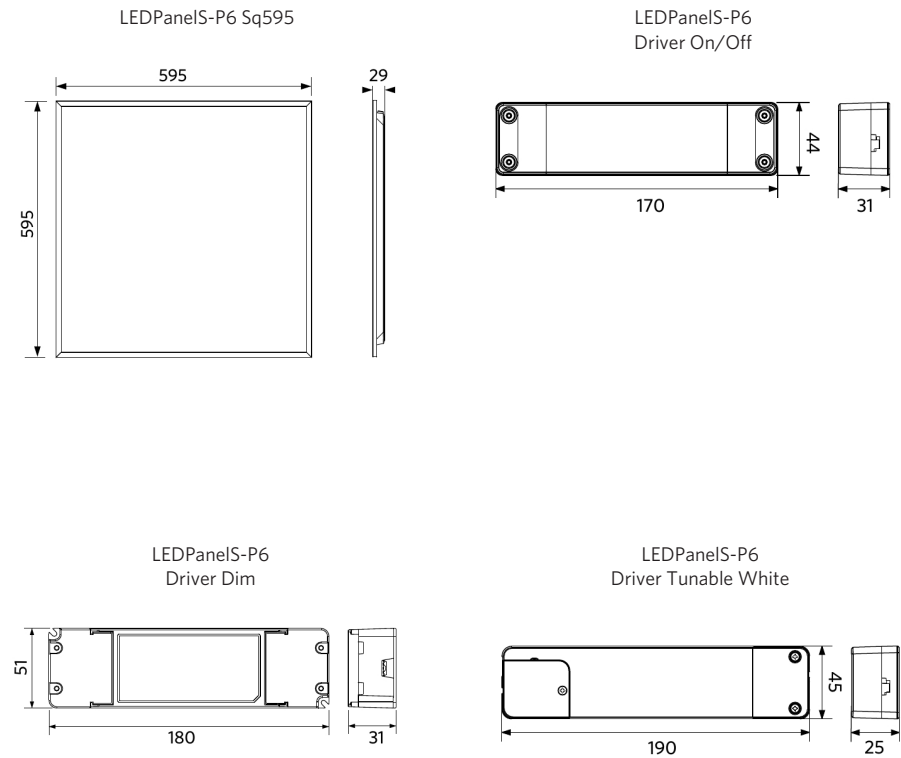

Photometric Data

