



Waterproof EcoMax G2

- Waterproof luminaire in "sealed-for-life" concept
- Quick installation through the easy to open endcap
- Supplied with vandal-proof stainless steel ceiling and suspension clips
- Equipped with 3x25mm² throughwiring



Specifications


Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
On-Off							
543022012400	LEDWaterproof-E2 L1260-18W-4000	TL 1x36W	18	2340	130	4000	0.97

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
543022012400	LEDWaterproof-E2 L1260-18W-4000	94051190	1300x67x61	1.26	6941408818450	1
506005001900	LEDWaterproof-E2-Mounting Kit	73269098	450x240x180	0.08	6941408831220	1


Technical Specifications		Electrical Supply	
Lifetime (L70)	50,000 h	Frequency	50/60 Hz
Lifetime (L80)	30,000 h	Nominal voltage	220-240 V
On-/Off-cycles	100,000	DC input voltage	No
Colour consistency (SDCM)	4	Mechanical Properties	
Dimmability	On-Off	Material housing	Polycarbonate
Beam angle	120°	UV resistant	Yes
Finishing	Grey RAL 7035	Optical material	Polycarbonate
Colour rendering index (CRI)	≥ 80	Mounting clips	Stainless steel
Degree of protection (IP)	IP66	Ambient Conditions	
Impact strength	IK08	Operating temperature	-20~+45°C
Protection class	II	Application temperature	+25°C
Risk group (EN 62471)	RG0	Storage environment	-30~+50°C
With control gear	Yes		
Glow wire test	850°C		
Power factor	≥ 0.9		
Input wire diameter	1mm ² - 2.5mm ²		
Internal wiring (mm ²)	3x2.5		
Max. input cable diameter (mm)	7-11.5 mm		

5 YEARS WARRANTY

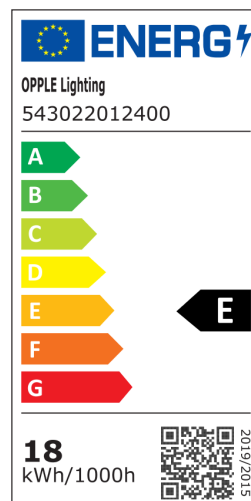


Dimensional Drawing (mm)

LEDWaterproof-E2 L1260



Installation Possibilities

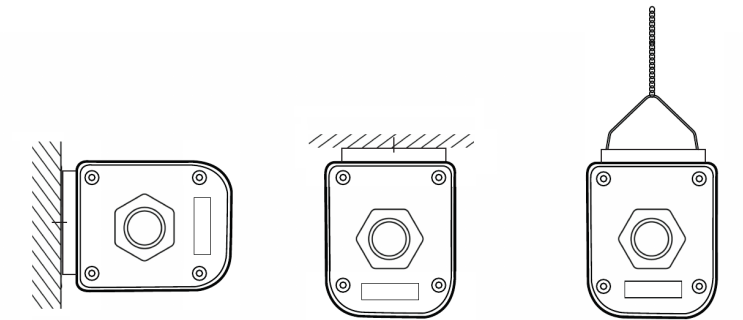

Photometric Data

