




Waterproof Classic G2

- New more sleek classic waterproof solution with clip design
- Improved efficacy of 150 lm/W
- Optimized diffuser design for more uniform illumination patterns
- Wiring from the back or side possible
- Supplied with vandal-proof stainless steel ceiling and suspension clips
- 3x2
- 5mm wire through kit available as accessory

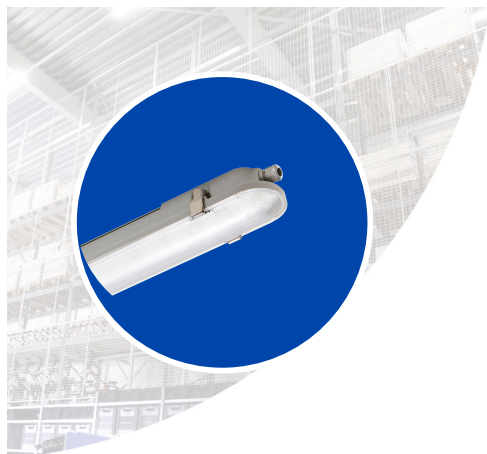

Specifications

Item Code	Item description	Equivalent System to	power	Rated luminous flux according to IEC 62722-2-1	Luminaire Colour efficacy	Colour temperature	Colour rendering index (CRI)	Price - WEEE_ES	Price - OPP_NL	Price - OPP_DACH	Price - OPP_BE	Price - OPP_ES	Price - OPP_PT	Product - Net weight
S1_EM3/DALI2	LEDWP-CLA-P2	TL	36	5400	150	4000	> 80	0.5	334	334	334	334		1.64
531000016200	L1200-36W-840-DALI-EM3	2x36W												

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
542098001000	LEDTrunking DALI Power Supply	85044083	198x54x39	0.24	6945730496614	1
799000002700	LEDWP-CLA-P2 Wirethrough-Kit-6	76169990	760x55x10	0.28	6931783035207	1

Technical Specifications

Max. system power
Lamp power
Rated luminous flux according to IEC 62722-2-1
Rated luminous flux according to IEC 62722-2-1
Luminaire efficacy
Lamp efficacy
UGR
Colour temperature
Beam angle_CF000014
Beam angle_CF000030
Effective wind area
With sensor
Colour rendering index (CRI)
Degree of protection (IP)

Version 2023
Wijzigingen voorbehouden

Max. input cable diameter

Electrical Supply


Frequency
Nominal voltage 220 - 240
DC input voltage See catalogue appendix Connection Specifications

Mechanical Properties

Material housing Polycarbonate
Optical material Polycarbonate
Mounting clips Stainless steel

Ambient Conditions

Operating temperature -20 - 45
Application temperature 25
Storage environment -30 - 60



Technical Specifications	
(mm)	
Compatible pole Ø (mm)	
Surge protection	
Lifetime (L70)	70000
Lifetime (L80)	50000
Lifetime (L80) HT	
Lifetime (L90)	
On-/Off-cycles	100000
Colour consistency (SDCM)	4
Dimmability	DALI2
Sensor type	No sensor
Sensor technology	No sensor
Beam angle_CF000014	120
Beam angle_CF000030	
Maximum tilt	
angle_CF000044	
Maximum tilt	
angle_CF004981	
Finishing	Grey RAL 7035
UGR	
Degree of protection (IP)	IP66
Ingress protection	
IP front side	
IP recessed part	
Impact strength	IK08
Protection class_EF000004	I
Protection class_CF236995	
Risk group (EN 62471)	
With control gear	True
Glow wire test	850
Driver failure rate (at 5,000 hrs)	0.5
Power factor	0.9
Displacement factor (DF)	
Surge protection	
Input wire diameter	1mm ² - 2.5mm ²
Internal wiring (mm ²)	5x2.5
Max. input cable diameter (mm)	5 - 11
Fitting	
Rechargeable	
Lux range	
Color temperature range	
Accuracy	
Operating temperature	
230V Cable length	
230V Connection cable length	
Housing material	
Cover material	
Lens material	
Compatible pole Ø	
Effective wind area	
Coastal proof	
Operating temperature HT	
Operating temperature MD	
Operating temperature EM	
Storage environment EM	

Photometric Data