



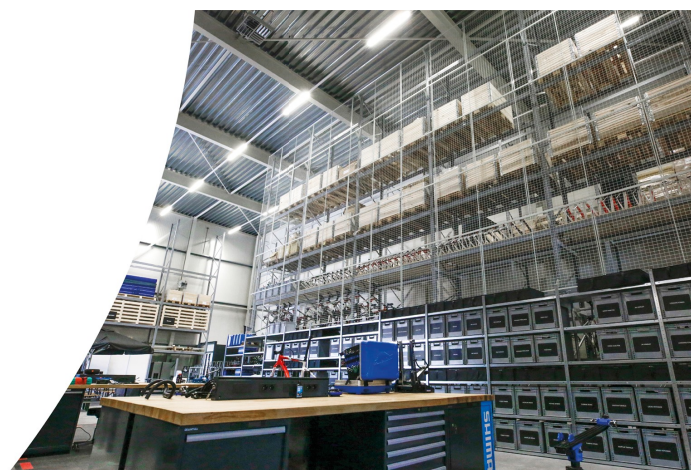

Waterdichtarmatuur Waterproof Classic G2

- Nieuwe meer gestroomlijnde klassieke waterdichte oplossing met clipontwerp
- Verbeterde efficiëntie van 150lm/W
- Geoptimaliseerd diffusorontwerp voor meer gelijkmatige verlichtingspatronen
- Bedrading vanaf de achterkant of zijkant mogelijk
- Geleverd met vandaalbestendige RVS montageklemmen
- 3x2,5mm draaddoorvoerkit beschikbaar als accessoire

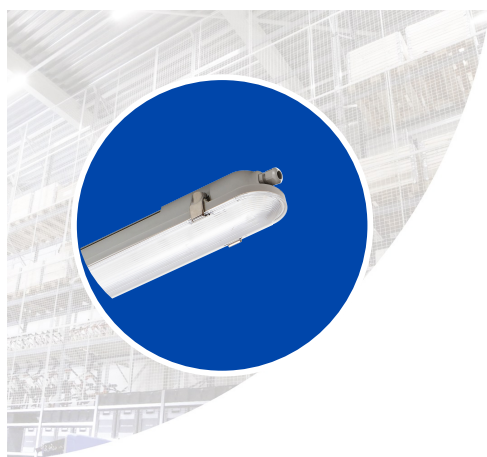

Specificaties

Item Code	Item description to	Equivalent System power	Rated luminous flux according to IEC 62722-2-1	Luminaire efficacy	Colour temperature index (CRI)	Colour rendering	Prijs - WEEE	Prijs - ES	Prijs - OPP_NL	Prijs - OPP_DACH	Prijs - OPP_BE	Prijs - OPP_ES	Prijs - OPP_PT	Product - Netto gewicht
-----------	---------------------	-------------------------	--	--------------------	--------------------------------	------------------	--------------	------------	----------------	------------------	----------------	----------------	----------------	-------------------------

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
531098002500	LEDWP-CLA-P2 Wirethrough-Kit	76169990	760x55x10	0.14	6931783035191	1
560006000900	LEDsmart-Sensor IP65-Base-Module	94059200	140x140x150	0.56	6941497726063	1
560006001000	LEDsmart-Sensor IP65-Module	94059200	145x120x150	0.55	6941497726056	1
560098000600	LEDsmart-Sensor Surface-Module-WH	94059200	330x220x255	0.15	6941497703972	1
821006001800	LEDsmart-BLE2-Rc-MW-Sensor	85365005	100x100x130	0.19	6941497778277	1
821006002000	LEDsmart-BLE2-Rc-PIR-Sensor	85365005	100x100x70	0.19	6941497778260	1
821009000200	LEDsmart-BLE2-Switch	85365005	89x21x101	0.10	6941497778253	1
821011002600	LEDsmart-BLE2-DALI-Connect-Box	85176200	100x60x105	0.30	6941497778291	1
821017003400	LEDsmart-BLE2-Multi-Switch-Module	94059200	46x46x50	0.07	6931783007600	1
821017003800	LEDsmart-BLE2-Relay-1000W	85364900	110x57x37	0.10	6941497778284	1

Technische specificaties

Max. system power

Lamp power

Rated luminous flux
according to IEC 62722-2-1

Rated luminous flux
according to IEC 62722-2-1

Luminaire efficacy

Lamp efficacy

UGR

Colour temperature

Beam angle_CF000014

Beam angle_CF000030

Effective wind area

With sensor

Visible light index (CRI)

Wirethrough

Elektrische Voeding

Frequency

Nominal voltage 220 - 240

DC input voltage
Zie catalogusbijlage
Aansluitwaarden

Mechanische Eigenschappen

Material housing Polycarbonaat

Optical material Polycarbonaat

Mounting clips Roestvaststaal (RVS)

Omgevingsomstandigheden

Operating temperature -20 - 45

Application temperature 25

Storage environment -30 - 60



Technische specificaties	
Internal wiring (mm ²)	
Max. input cable diameter (mm)	
Compatible pole Ø (mm)	
Surge protection	
Lifetime (L70)	70000
Lifetime (L80)	50000
Lifetime (L80) HT	
Lifetime (L90)	
On-/Off-cycles	100000
Colour consistency (SDCM)	4
Dimmability	BLE2
Sensor type	Geen sensor
Sensor technology	Geen sensor
Beam angle_CF000014	120
Beam angle_CF000030	
Maximum tilt angle_CF000044	
Maximum tilt angle_CF004981	
Finishing	Grijs RAL 7035
UGR	
Degree of protection (IP)	IP66
Ingress protection	
IP front side	
IP recessed part	
Impact strength	IK08
Protection class_EF000004	I
Protection class_CF236995	
Risk group (EN 62471)	
With control gear	Ja
Glow wire test	850
Driver failure rate (at 5,000 hrs)	0.5
Power factor	0.9
Displacement factor (DF)	
Surge protection	
Input wire diameter	1mm ² - 2.5mm ²
Internal wiring (mm ²)	3x2.5
Max. input cable diameter (mm)	5 - 11
Fitting	
Rechargeable	
Lux range	
Color temperature range	
Accuracy	
Operating temperature	
230V Cable length	
230V Connection cable length	
Housing material	
Cover material	
Lens material	
Compatible pole Ø	
Effective wind area	
Coastal proof	
Operating temperature HT	
Operating temperature MD	
Operating temperature EM	
Storage environment EM	

Photometric Data