



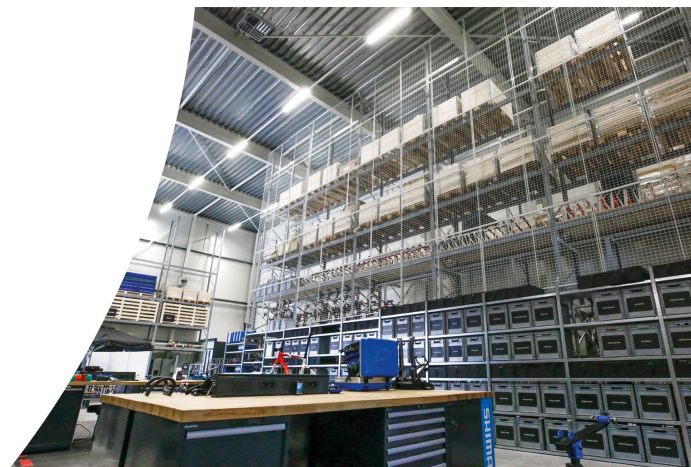

Waterdichtarmatuur Waterproof Classic G2

- Nieuwe meer gestroomlijnde klassieke waterdichte oplossing met clipontwerp
- Verbeterde efficiëntie van 150lm/W
- Geoptimaliseerd diffusorontwerp voor meer gelijkmatige verlichtingspatronen
- Bedrading vanaf de achterkant of zijkant mogelijk
- Geleverd met vandaalbestendige RVS montageklemmen
- 3x2,5mm draaddoorvoerkit beschikbaar als accessoire

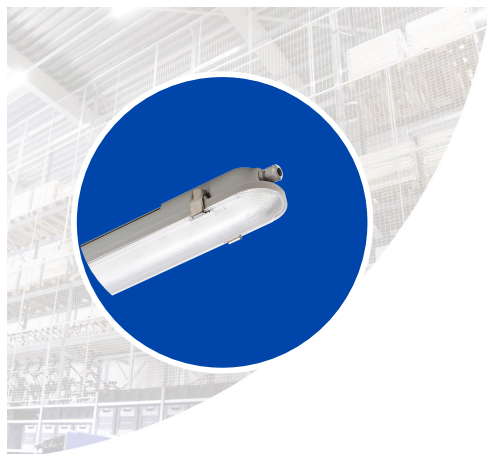

Specificaties

Item Code	Item description	Equivalent System to	System power	Rated luminous flux according to IEC 62722-2-1	Luminaire Colour efficacy	Colour temperature	Colour rendering index (CRI)	Prijs - WEEE_ES	Prijs - OPP_NL	Prijs - OPP_DACH	Prijs - OPP_BE	Prijs - OPP_ES	Prijs - OPP_PT	Product - Netto gewicht
S1_EM3/DALI2														
531000016400	LEDWP-CLA-P2 L1500-44W-840-DALI-EM3	TL 2x58W	44	6600	150	4000	> 80	0.5	339	339	339	339		1.96

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
542098001000	LEDTrunking DALI Power Supply	85044083	198x54x39	0.24	6945730496614	1
799000002700	LEDWP-CLA-P2 Wirethrough-Kit-6	76169990	760x55x10	0.28	6931783035207	1

Technische specificaties

Max. system power
Lamp power
Rated luminous flux according to IEC 62722-2-1
Rated luminous flux according to IEC 62722-2-1
Luminaire efficacy
Lamp efficacy
UGR
Colour temperature
Beam angle_CF000014
Beam angle_CF000030
Effective wind area
With sensor
Colour rendering index (CRI)
Degree of protection (IP)
Wirethrough
Internal wiring (mm ²)
Max. input cable diameter
Wijziging van gegevens voorbehouden (mm)
Compatible pole Ø (mm)

Versie oktober 2023

Wijziging van gegevens voorbehouden

Elektrische Voeding


Frequency	
Nominal voltage	220 - 240
DC input voltage	Zie catalogusbijlage Aansluitwaarden

Mechanische Eigenschappen

Material housing	Polycarbonaat
Optical material	Polycarbonaat
Mounting clips	Roestvaststaal (RVS)

Omgevingsomstandigheden

Operating temperature	-20 - 45
Application temperature	25
Storage environment	-30 - 60



Technische specificaties	
Surge protection	
Lifetime (L70)	70000
Lifetime (L80)	50000
Lifetime (L80) HT	
Lifetime (L90)	
On-/Off-cycles	100000
Colour consistency (SDCM)	4
Dimmability	DALI2
Sensor type	Geen sensor
Sensor technology	Geen sensor
Beam angle_CF000014	120
Beam angle_CF000030	
Maximum tilt angle_CF000044	
Maximum tilt angle_CF004981	
Finishing	Grijs RAL 7035
UGR	
Degree of protection (IP)	IP66
Ingress protection	
IP front side	
IP recessed part	
Impact strength	IK08
Protection class_EF000004	I
Protection class_CF236995	
Risk group (EN 62471)	
With control gear	Ja
Glow wire test	850
Driver failure rate (at 5,000 hrs)	0.5
Power factor	0.9
Displacement factor (DF)	
Surge protection	
Input wire diameter	1mm ² - 2.5mm ²
Internal wiring (mm ²)	5x2.5
Max. input cable diameter (mm)	5 - 11
Fitting	
Rechargeable	
Lux range	
Color temperature range	
Accuracy	
Operating temperature	
230V Cable length	
230V Connection cable length	
Housing material	
Cover material	
Lens material	
Compatible pole Ø	
Effective wind area	
Coastal proof	
Operating temperature HT	
Operating temperature MD	
Operating temperature EM	
Storage environment EM	

Photometric Data