



Spot Performer 3C Compact

- High performance compact track spot with high luminous efficiency and homogeneous light distribution
- Various beam angles achievable with exchangeable reflectors
- Fitting common Global/Nordic Aluminum® 3C Tracks – and many other standard types
- Low glare due to matte black anti-glare ring
- Honeycomb filters available for further glare reduction



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Beam angle	Weight (kg/pc)
On-Off								
541001052600	LEDSpot3C-C-P 35W-4000-36D-BL	HID 50W	35	3150	90	4000	36°	0.94

Accessories



550098000500
LEDSpot3C-C-P R100-
Reflector-24D



599007082800
LEDSpot3C-C-P R100-
Honeycomb

Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
541001052600	LEDSpot3C-C-P 35W-4000-36D-BL	94051190	330x135x135	1.18	6941408813837	1
550098000500	LEDSpot3C-C-P R100-Reflector-24D	94059200	90x90x50	0.07	6941408820934	1
599007082800	LEDSpot3C-C-P R100-Honeycomb	94059200	96.5x96.5x12.8	0.21	6941408896724	1

Technical Specifications	
Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Colour consistency (SDCM)	4
Dimmability	On-Off
Maximum tilt angle	85°
Finishing	Matte Black
Colour rendering index (CRI)	≥ 90
Degree of protection (IP)	IP20
Impact strength	IK03
Protection class	I
Risk group (EN 62471)	RG1
With control gear	Yes
Glow wire test	650°C
Power factor	≥ 0.9

Electrical Supply	
Frequency	50/60 Hz
Nominal voltage	220-240 V
DC input voltage	See catalogue appendix Connection Specifications

Mechanical Properties	
Housing material	Aluminium
Optical material	Dome shape
Lens material	Polycarbonate

Ambient Conditions	
Operating temperature	-10~+40°C
Application temperature	+25°C
Storage environment	-25~+50°C



ENERGY

OPPLE Lighting
541001052600

A	
B	
C	
D	
E	
F	
G	


F

35
kWh/1000h

2019/2015

Dimensional Drawing (mm)

LEDspot3C-C-P 35W

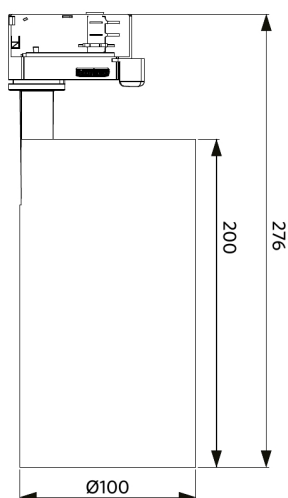

Photometric Data

