



Waterproof Basic G2

- Cost effective "sealed-for-life" waterproof luminaire
- Improved efficacy of 130 lm/W
- Standard equipped with wirethrough for faster installation
- Easy, tool-less installation for electrical connection
- Supplied with stainless steel ceiling and suspension clips



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
On-Off							
711000005000	LEDWaterproof-B2 L1500-50W-840	TL 2x58W	50	6500	130	4000	0.82


Packaging Information

Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
711000005000	LEDWaterproof-B2 L1500-50W-840	94051190	70x70x1600	0.89	6931783004821	1


Technical Specifications		Electrical Supply	
Lifetime (L70)	50,000 h	Frequency	50/60 Hz
Lifetime (L80)	30,000 h	Nominal voltage	220-240 V
On-/Off-cycles	100,000	DC input voltage	See catalogue appendix
Colour consistency (SDCM)	5	Connection	Specifications
Dimmability	On-Off	Mechanical Properties	
Beam angle	110°		
Finishing	Grey RAL 7035		
Colour rendering index (CRI)	> 80		
Degree of protection (IP)	IP65	Material housing	Polycarbonate
Impact strength	IK08	UV resistant	Yes
Protection class	II	Optical material	Polycarbonate
Risk group (EN 62471)	RG0	Mounting clips	Stainless steel
With control gear	Yes	Ambient Conditions	
Glow wire test	650°C		
Power factor	≥ 0.9		
Input wire diameter	1mm ² - 2.5mm ²		
Internal wiring (mm ²)	3x1.5	Operating temperature	-30~+45°C
Max. input cable diameter (mm)	5-9 mm	Application temperature	+25°C
		Storage environment	-30~+50°C



Dimensional Drawing (mm)

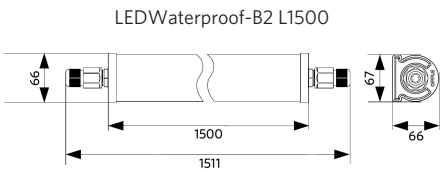

Installation Possibilities

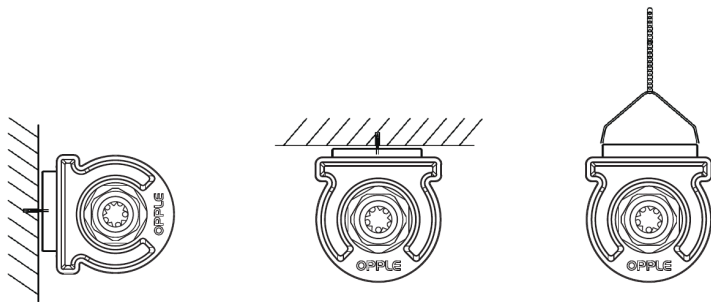

Photometric Data

