

T5 Standard Short
F13W/T5/33-640 G5 SLV 10 WAY
0000419



- Product features
- T5 Standard Short



PRODUCT OVERVIEW

Product name	F13W/T5/33-640 G5 SLV 10 WAY
Technology	Fluorescent
Watt (Rated) (W)	12.80
Lamp shape	Tube, double-ended
Type	T5 Standard Short
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC000108
Luminous flux (lm)	880
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	69
Colour temperature (K)	4000
Light colour	Cool White
Colour Code	640
CRI (Ra)	60
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	13.00
Dimmable	Yes
Average life (Nominal) (h)	10000
Product EAN number	5410288004198

DATA TABLE

General data	
Product name	F13W/T5/33-640 G5 SLV 10 WAY
Technology	Fluorescent
Watt (Rated) (W)	12.80
Lamp shape	Tube, double-ended
Type	T5 Standard Short
Cap/Base	G5
Lamp finish	Frosted/Coated

T5 Standard Short

F13W/T5/33-640 G5 SLV 10 WAY
0000419

Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC000108

Optical data

Luminous flux (lm)	880
Luminous flux (Rated) (lm)	880
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	69
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	4000
Light colour	Cool White
Colour Code	640
CRI (Ra)	60
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.88
Rated lumen maint. factor (%) at 4000 h 50Hz	0.82
Rated lumen maint. factor (%) at 6000 h 50Hz	0.78
Rated lumen maint. factor (%) at 8000 h 50Hz	0.75

Electrical data

Wattage (W)	13.00
Current (A)	0.165
Primary Supply/Product voltage - min (V)	85.0
Primary Supply/Product voltage - max (V)	105.0
Control gear required	Yes
Dimmable	Yes
Drive current (mA)	165
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	15

Lifetime data

Average life (Nominal) (h)	10000
Average life (Rated) (h)	10000
Rated survival factor (%) at 2000 h 50Hz	1.00
Rated survival factor (%) at 4000 h 50Hz	0.99
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.83

Physical data

Nominal Product Length (mm)	525.0
Nominal Product Diameter (mm)	16

T5 Standard Short
F13W/T5/33-640 G5 SLV 10 WAY
0000419

Max. Length base to base (mm) - A	516.9
Length base to pin Min-Max (mm) - B	521.6-524.0
Max. Lamp Length (mm) - C/L	531.1
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.045


Packaging

Single packaging type	Carton
Product EAN number	5410288004198
Packaging single length / height (cm)	53.37
Packaging single width (cm)	1.7
Packaging single depth (cm)	1.67
DUN14 (outer)	15410288004195
Units per outer package	10
Packaging outer length / height (cm)	54.1
Packaging outer width (cm)	9.2
Packaging outer depth (cm)	3.9


Safety data

Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

PHOTOMETRY

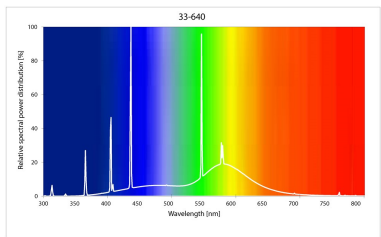


TECHNICAL DRAWINGS



T5 Standard Short
F13W/T5/33-640 G5 SLV 10 WAY
0000419



0000419

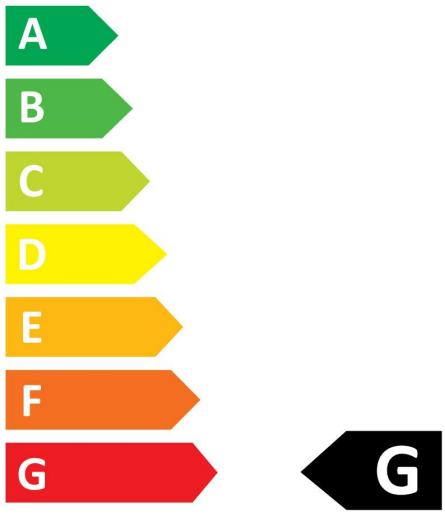

13
kWh/1000h




2019/2015

T5 Standard Short
F13W/T5/33-640 G5 SLV 10 WAY
0000419



0000419

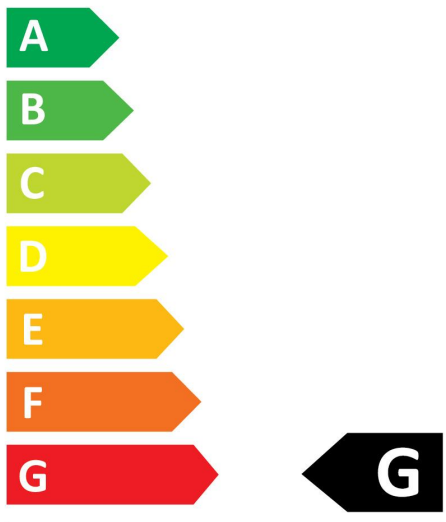

13
kWh/1000h



2019/2015