

Start Spot Alu IP65
START SPOT ALUMINIUM 740LM 830 IP65 WHT
0005174



Product features

- Integrated LED recessed spotlight, white bezel colour, white reflector, 740lm, 9.0W, dimmable trailing/leading edge, 3000K, 40° degree beam angle, polycarbonate and aluminium body, low profile 62mm recessed depth, IP65 from the front, IK03, loop-in/loop-out terminals for fast wiring, weight 0,165Kg, 85mm bezel diameter, 68-72mm cutout, clear lens.



PRODUCT OVERVIEW

Product name	START SPOT ALUMINIUM 740LM 830 IP65 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
Warranty	3 years
Fixture luminous flux (lm)	740
Luminaire efficacy (lm/W)	82
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	9
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Minimum dimming level (%)	10
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP65/20
IK rating	IK07
Product EAN number	5410288051741

DATA TABLE

General data

Start Spot Alu IP65

START SPOT ALUMINIUM 740LM 830 IP65 WHT

0005174

Product name	START SPOT ALUMINIUM 740LM 830 IP65 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer
Operating temperature range (°C)	-10°C...+35°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	3 years

Optical data

Fixture luminous flux (lm)	740
Luminaire efficacy (lm/W)	82
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	40
Distribution type	Symmetric
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	9
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	40
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Minimum dimming level (%)	10
Drive current (mA)	165
Inrush Current (A)	10
Inrush Duration (µs)	150
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	50
Max. products per 13A C Breaker	65
Max. products per 16A C Breaker	80
Max. products per 20A C Breaker	100
Max. products per 16A B Breaker	30

Start Spot Alu IP65

START SPOT ALUMINIUM 740LM 830 IP65 WHT

0005174

Lifetime data

Lifespan L70 B50	47000
------------------	-------

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP65/20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Reflector finish	White
Nominal Product Height (mm)	64
Nominal Product Diameter (mm)	86
Cutout Dimensions (W x L in mm or Diameter in mm)	68-72
Weight (kg)	0.14
Recessed Depth (mm)	100

Packaging


Single packaging type	Carton
Product EAN number	5410288051741
Packaging single length / height (cm)	10.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	25410288051745
Units per inner package	6
Packaging inner length / height (cm)	28.5
Packaging inner width (cm)	9.0
Packaging inner depth (cm)	19.0
DUN14 (outer)	15410288051748
Units per outer package	36
Packaging outer length / height (cm)	43.6
Packaging outer width (cm)	35.6
Packaging outer depth (cm)	29.3

Safety data

Optimal operating condition (°C)	-10-35
----------------------------------	--------

PHOTOMETRY

Start Spot Alu IP65
START SPOT ALUMINIUM 740LM 830 IP65 WHT
0005174

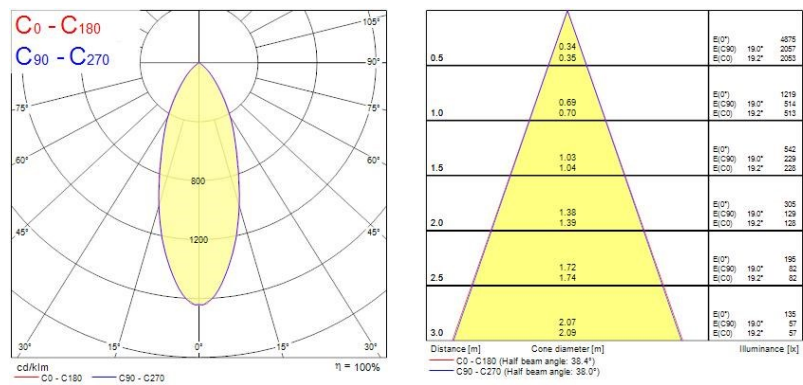

TECHNICAL DRAWINGS

