

RefLED R63
RefLED R63 V4 630LM 830 E27 SL
0029208



- Product features**
- Energy efficient LED alternative for traditional incandescent and halogen blown reflector lamp
 - Modern construction and attractive design
 - Mercury free solution
 - Long average rated lifetime: 15,000 hours
 - Lower maintenance cost compared to traditional lamps
 - Non-dimmable
 - 3 years warranty
 - Perfect for general lighting applications: residential lighting, down lights, hotels, hotels, restaurants, bars, lobbies, corridors, halls, etc



PRODUCT OVERVIEW

Product name	RefLED R63 V4 630LM 830 E27 SL
Technology	LED
Watt (Rated) (W)	7
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741088
Warranty	3 years
Luminous flux (lm)	630
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	120
Photobiological Risk Group	RG1
Wattage (W)	7
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288292083

DATA TABLE

General data	
Product name	RefLED R63 V4 630LM 830 E27 SL
Technology	LED
Watt (Rated) (W)	7

RefLED R63

RefLED R63 V4 630LM 830 E27 SL

0029208

Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741088
Warranty	3 years

Optical data

Luminous flux (lm)	630
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	120
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	7
Equivalent watt (W)	50
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	2
Inrush Duration (µs)	240
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	80
Max. products per 16A B Breaker	40

Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Length (mm)	97
Nominal Product Diameter (mm)	63
Weight (kg)	0.04

RefLED R63
RefLED R63 V4 630LM 830 E27 SL
0029208


Packaging

Single packaging type	Carton
Product EAN number	5410288292083
Packaging single length / height (cm)	6.3
Packaging single width (cm)	6.3
Packaging single depth (cm)	10.0
DUN14 (outer)	15410288292080
Units per outer package	6
Packaging outer length / height (cm)	19.7
Packaging outer width (cm)	13.3
Packaging outer depth (cm)	10.7


Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

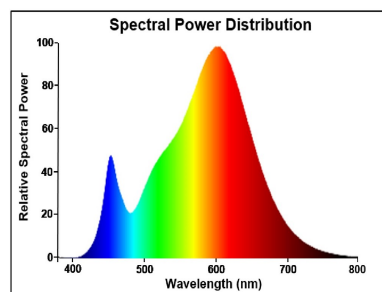

TECHNICAL DRAWINGS



RefLED R63
RefLED R63 V4 630LM 830 E27 SL
0029208

**ENERG**

SYLVANIA

0029208




7
kWh/1000h



2019/2015

RefLED R63
RefLED R63 V4 630LM 830 E27 SL
0029208

**ENERG**
SYLVANIA
0029208

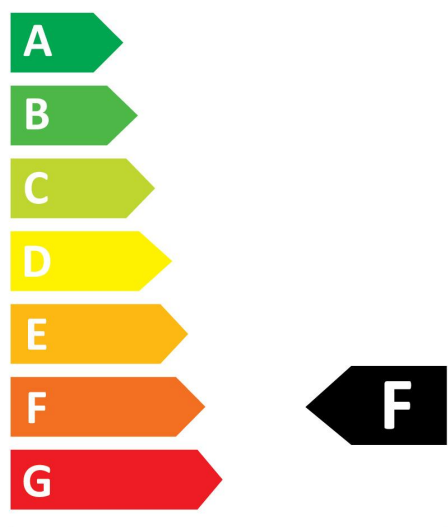

7
kWh/1000h



2019/2015