

Start Surface IP66 Ø350mm New
START Surface IP66 900-2950LM 840 IK10 BLK
0049295



Product features

- LED exterior surface mounted luminaire, 350mm diameter, 2950lm as max. lumen output, can be adjusted down to 900lm by internal switch, max 24W power consumption, max 133lm/W efficacy, 4000K color temperature, CRI80, non-dimmable, IP66, IK10, 100,000 hours (L70B50) Lifespan, black housing, vandal resistant, supplied with anti-theft screws



PRODUCT OVERVIEW

Product name	START Surface IP66 900-2950LM 840 IK10 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579596
Warranty	5 years
Fixture luminous flux (lm)	2950
Luminaire efficacy (lm/W)	123
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492957

DATA TABLE

General data	
Product name	START Surface IP66 900-2950LM 840 IK10 BLK
Technology	LED
Cap/Base	N/A

Start Surface IP66 Ø350mm New

START Surface IP66 900-2950LM 840 IK10 BLK

0049295

Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor, Outdoor
General application	Hospitality
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4579596
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2950
Luminaire efficacy (lm/W)	123
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Distribution type	Diffuse, Symmetric
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	24
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	15
Electrical protection	Class II
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Inrush Current (A)	10
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	38
Max. products per 13A C Breaker	47
Max. products per 16A C Breaker	57
Max. products per 20A C Breaker	66
Max. products per 10A B Breaker	30
Max. products per 13A B Breaker	38
Max. products per 16A B Breaker	45
Connectable conductor cross section - Max (mm²)	2.5

Start Surface IP66 Ø350mm New
START Surface IP66 900-2950LM 840 IK10 BLK
0049295

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B50	100000
Lifespan L90 B50	71000

Physical data

Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	111
Nominal Product Diameter (mm)	350
Weight (kg)	1.25



Packaging

Single packaging type	Carton
Product EAN number	5410288492957
Packaging single length / height (cm)	35.0
Packaging single width (cm)	35.0
Packaging single depth (cm)	11.1
DUN14 (outer)	15410288492954
Units per outer package	8
Packaging outer length / height (cm)	72.0
Packaging outer width (cm)	37.0
Packaging outer depth (cm)	49.0


Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

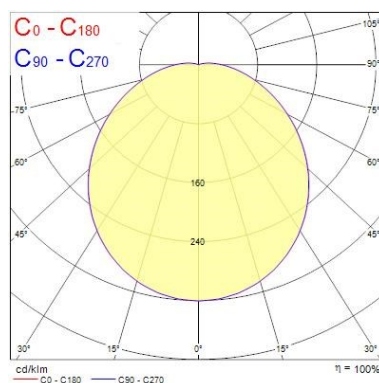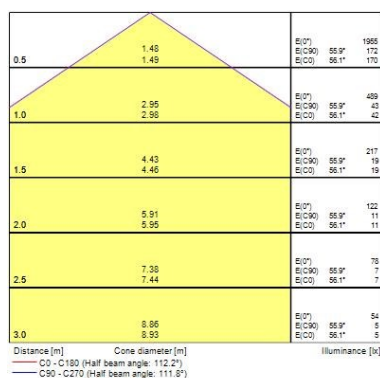


Start Surface IP66 Ø350mm New START Surface IP66 900-2950LM 840 IK10 BLK 0049295

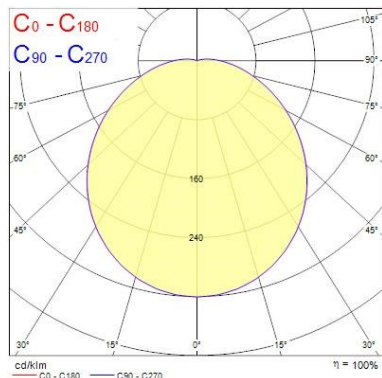

0.5	1.48 1.48	E(0°) E(C90) E(C0)	2340 209 203
1.0	2.95 2.98	E(0°) E(C90) E(C0)	585 52 51
1.5	4.43 4.46	E(0°) E(C90) E(C0)	260 23 22
2.0	5.91 5.95	E(0°) E(C90) E(C0)	145 13 13
2.5	7.38 7.44	E(0°) E(C90) E(C0)	94 8 8
3.0	8.86 8.93	E(0°) E(C90) E(C0)	65 6 6

Distance [m] Cone diameter [m]
— C0 - C180 (Half beam angle: 112.2°)
— C90 - C270 (Half beam angle: 111.8°)

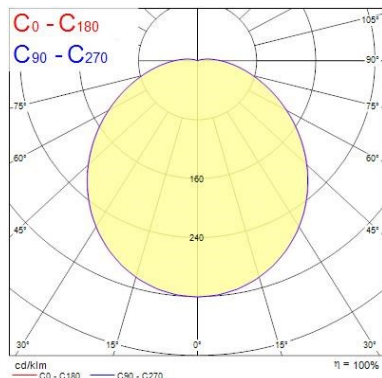


0.5	1.48 1.48	E(0°) E(C90) E(C0)	3077 271 267
1.0	2.95 2.98	E(0°) E(C90) E(C0)	769 66 67
1.5	4.43 4.46	E(0°) E(C90) E(C0)	342 30 30
2.0	5.91 5.95	E(0°) E(C90) E(C0)	192 17 17
2.5	7.38 7.44	E(0°) E(C90) E(C0)	123 11 11
3.0	8.86 8.93	E(0°) E(C90) E(C0)	85 8 7

Distance [m] Cone diameter [m]
— C0 - C180 (Half beam angle: 112.2°)
— C90 - C270 (Half beam angle: 111.8°)


0.5	1.48 1.48	E(0°) E(C90) E(C0)	3782 333 328
1.0	2.95 2.98	E(0°) E(C90) E(C0)	945 83 82
1.5	4.43 4.46	E(0°) E(C90) E(C0)	420 37 36
2.0	5.91 5.95	E(0°) E(C90) E(C0)	236 21 21
2.5	7.38 7.44	E(0°) E(C90) E(C0)	151 13 13
3.0	8.86 8.93	E(0°) E(C90) E(C0)	102 9 9

Distance [m] Cone diameter [m]
— C0 - C180 (Half beam angle: 112.2°)
— C90 - C270 (Half beam angle: 111.8°)






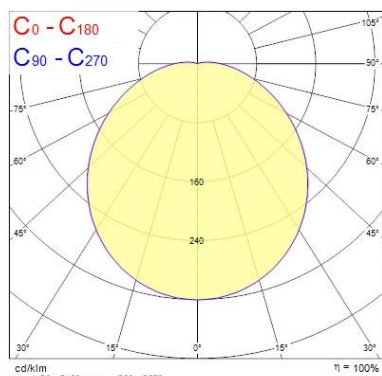


0.5	1.48 1.48	E(0°) E(C90) E(C0)	2692 237 234
1.0	2.95 2.98	E(0°) E(C90) E(C0)	673 59 58
1.5	4.43 4.46	E(0°) E(C90) E(C0)	299 26 26
2.0	5.91 5.95	E(0°) E(C90) E(C0)	185 16 15
2.5	7.38 7.44	E(0°) E(C90) E(C0)	108 9 9
3.0	8.86 8.93	E(0°) E(C90) E(C0)	75 7 6

Distance [m] Cone diameter [m]
— C0 - C180 (Half beam angle: 112.2°)
— C90 - C270 (Half beam angle: 111.8°)

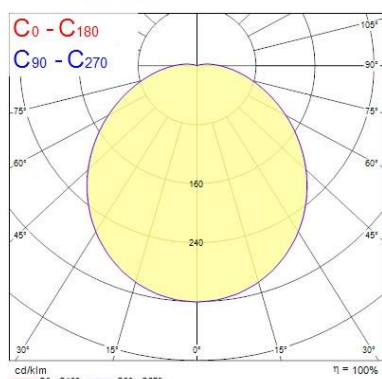

Start Surface IP66 Ø350mm New
START Surface IP66 900-2950LM 840 IK10 BLK
0049295

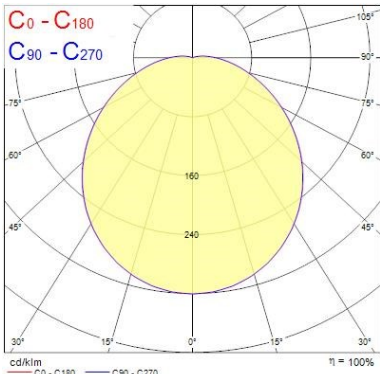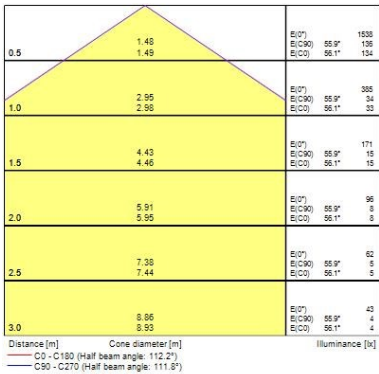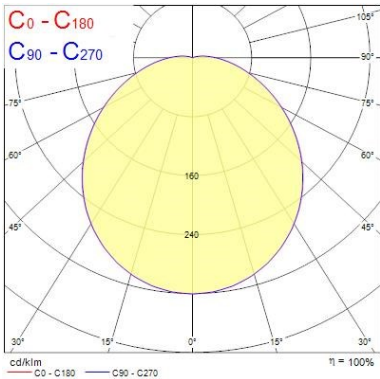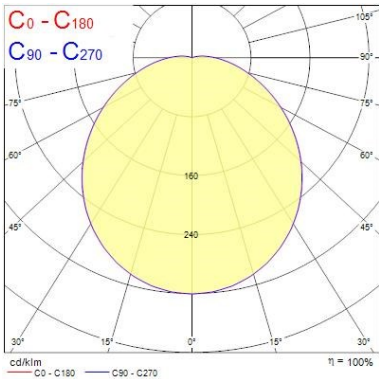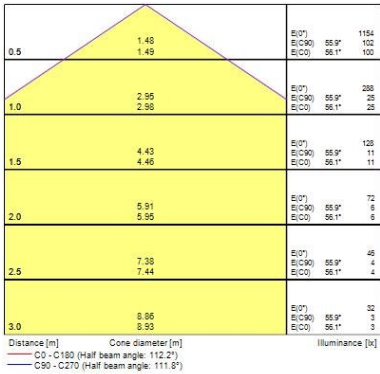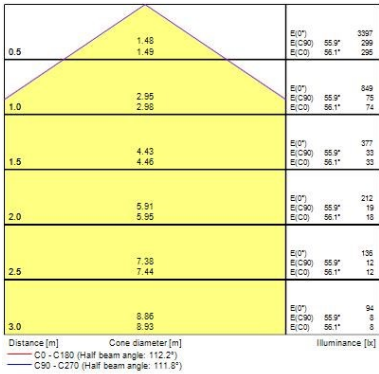

TECHNICAL DRAWINGS

