

Start Flood Flat PIR
Start Flood Flat IP54 PIR 2850LM 830 Black
0050137



- Product features**
- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 2850 lm, 28 W, 102 lm/W, 3000K, non dimmable, CRI>80, IP54, IK06 - fixture, IK05 - sensor, Class I, lifespan L70:B50: 90000 hrs, 201 x 156 x 57 mm (L x W x H). Weight: 0.575kg. PIR sensor included.



PRODUCT OVERVIEW

Product name	Start Flood Flat IP54 PIR 2850LM 830 Black
Technology	LED
Cap/Base	N/A
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579541
Warranty	3 years
Fixture luminous flux (lm)	2850
Luminaire efficacy (lm/W)	102
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	28.0
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Low (6% - 20%)
Housing colour	Black
IP rating	IP54
IK rating	IK06
Product EAN number	5410288501376

DATA TABLE

General data	
Product name	Start Flood Flat IP54 PIR 2850LM 830 Black
Technology	LED
Cap/Base	N/A
General application	Residential & Consumer

Start Flood Flat PIR

Start Flood Flat IP54 PIR 2850LM 830 Black
0050137

Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001744
E-number FI	4579541
Warranty	3 years

Optical data

Fixture luminous flux (lm)	2850
Luminaire efficacy (lm/W)	102
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	28.0
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Drive current (mA)	60
Inrush Current (A)	20.4
Inrush Duration (µs)	390
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	15
Max. products per 13A C Breaker	20
Max. products per 16A C Breaker	25
Max. products per 20A C Breaker	30
Max. products per 10A B Breaker	9
Max. products per 13A B Breaker	12
Max. products per 16A B Breaker	15
Max. products per 20A B Breaker	18

Lifetime data

Lifespan L70 B50	90000
Lifespan L80 B50	73000
Lifespan L80 B20	47000

Physical data

Housing colour	Black
IP rating	IP54
IK rating	IK06

Start Flood Flat PIR

Start Flood Flat IP54 PIR 2850LM 830 Black
0050137

IK rating of sensor	IK05
Nominal Product Length (mm)	201
Nominal Product Width (mm)	156
Nominal Product Height (mm)	57
Weight (kg)	0.575



Packaging

Single packaging type	Carton
Product EAN number	5410288501376
Packaging single length / height (cm)	16.1
Packaging single width (cm)	5.9
Packaging single depth (cm)	21.0
DUN14 (outer)	15410288501373
Units per outer package	6
Packaging outer length / height (cm)	38.2
Packaging outer width (cm)	17.4
Packaging outer depth (cm)	22.8

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

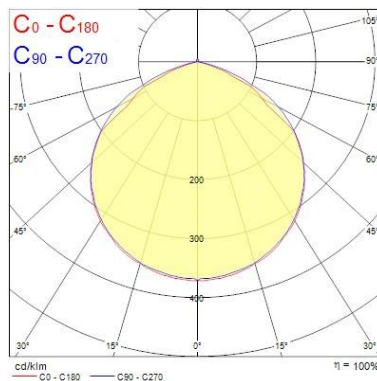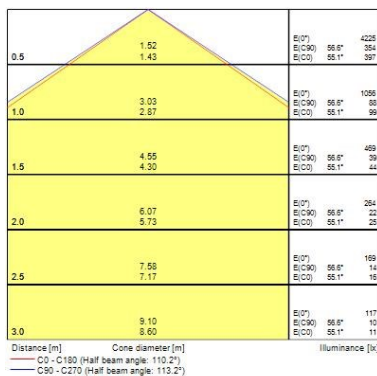

TECHNICAL DRAWINGS

