


RANA LED Surface 1500
RANA LED S 1500 LO 3K LOUV+PRI W GEN2
0051501



Product features

- Surface or Suspended LED Linear luminaire with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1440x187x47mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 1410x65mm, Constant Current, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3700lm, 34W, 109lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.

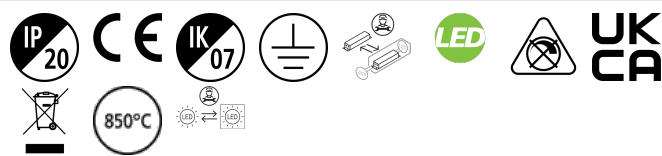

PRODUCT OVERVIEW

Product name	RANA LED S 1500 LO 3K LOUV+PRI W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
General application	Office, Hospitality, Retail, Education
ETIM Class	EC002892
E-number FI	4273698
Warranty	5 years
Fixture luminous flux (lm)	3700
Luminous flux (lm)	3700
Luminaire efficacy (lm/W)	109
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	34
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288515014

DATA TABLE

General data

Product name	RANA LED S 1500 LO 3K LOUV+PRI W GEN2
Technology	LED

RANA LED Surface 1500

RANA LED S 1500 LO 3K LOUV+PRI W GEN2

0051501

Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
General application	Office, Hospitality, Retail, Education
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4273698
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3700
Luminous flux (lm)	3700
Luminaire efficacy (lm/W)	109
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	34
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Drive current (mA)	275
Inrush Current (A)	25
Inrush Duration (µs)	280
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C, D(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	23
Max. products per 13A C Breaker	31
Max. products per 16A C Breaker	40
Max. products per 20A C Breaker	50
Max. products per 10A B Breaker	14
Max. products per 13A B Breaker	19
Max. products per 16A B Breaker	24
Max. products per 20A B Breaker	30
Connectable conductor cross section - Min (mm²)	2.5
Connectable conductor cross section - Max (mm²)	2.5

RANA LED Surface 1500

RANA LED S 1500 LO 3K LOUV+PRI W GEN2

0051501

Lifetime data

Lifespan L70 B50	50000
Lifespan L70 B10	50000
Lifespan L80 B50	50000
Lifespan L80 B10	50000
Lifespan L90 B50	50000
Lifespan L90 B10	50000

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1460
Nominal Product Width (mm)	187
Nominal Product Height (mm)	47
Weight (kg)	4.2

Packaging


Single packaging type	Carton
Product EAN number	5410288515014
Packaging single length / height (cm)	153.5
Packaging single width (cm)	6.5
Packaging single depth (cm)	21.0
DUN14 (outer)	05410288515014
Units per outer package	1
Packaging outer length / height (cm)	153.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	21.0

PHOTOMETRY

0.5	0.96 0.91	E(0°) E(C90) E(C0)	7504 1444 1684
1.0	1.91 1.81	E(0°) E(C90) E(C0)	1901 361 416
1.5	2.87 2.72	E(0°) E(C90) E(C0)	848 180 195
2.0	3.82 3.63	E(0°) E(C90) E(C0)	478 90 104
2.5	4.78 4.53	E(0°) E(C90) E(C0)	304 58 67
3.0	5.73 5.44	E(0°) E(C90) E(C0)	211 40 46

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 64.4°)
— C90 - C270 (Half beam angle: 87.4°)

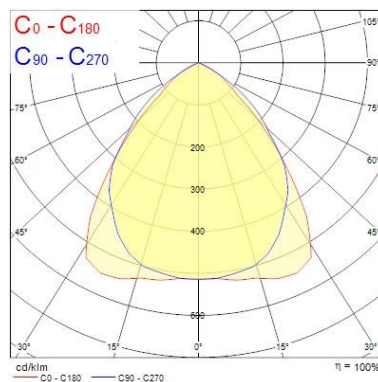

RANA LED Surface 1500
RANA LED S 1500 LO 3K LOUV+PRI W GEN2
0051501

TECHNICAL DRAWINGS

