


RANA LED Surface 1500
RANA LED S 1500 HO 3K LOUV+PRI W GEN2
0051527



Product features

- Surface or Suspended LED Linear luminaire with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1440x187x47mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 1410x165mm, Constant Current, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 7000lm, 62W, 113lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.

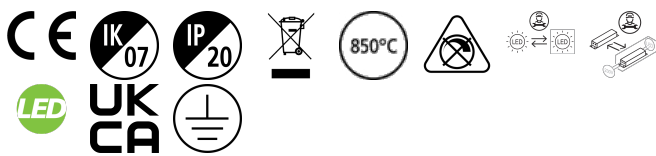

PRODUCT OVERVIEW

Product name	RANA LED S 1500 HO 3K LOUV+PRI W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
General application	Office, Hospitality, Retail, Education
ETIM Class	EC002892
E-number FI	4273710
Warranty	5 years
Fixture luminous flux (lm)	7000
Luminous flux (lm)	7000
Luminaire efficacy (lm/W)	113
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	62
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288515274

DATA TABLE

General data	
Product name	RANA LED S 1500 HO 3K LOUV+PRI W GEN2
Technology	LED

RANA LED Surface 1500

RANA LED S 1500 HO 3K LOUV+PRI W GEN2

0051527

Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
General application	Office, Hospitality, Retail, Education
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4273710
Warranty	5 years

Optical data

Fixture luminous flux (lm)	7000
Luminous flux (lm)	7000
Luminaire efficacy (lm/W)	113
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	62
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.98
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Drive current (mA)	525
Inrush Current (A)	57.7
Inrush Duration (µs)	217
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C, D(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	10
Max. products per 13A C Breaker	13
Max. products per 16A C Breaker	16
Max. products per 20A C Breaker	21
Max. products per 10A B Breaker	6
Max. products per 13A B Breaker	8
Max. products per 16A B Breaker	10
Max. products per 20A B Breaker	12
Connectable conductor cross section - Min (mm²)	2.5
Connectable conductor cross section - Max (mm²)	2.5

RANA LED Surface 1500

RANA LED S 1500 HO 3K LOUV+PRI W GEN2

0051527

Lifetime data

Lifespan L70 B50	50000
Lifespan L70 B10	50000
Lifespan L80 B50	50000
Lifespan L80 B10	50000
Lifespan L90 B50	50000
Lifespan L90 B10	50000

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1460
Nominal Product Width (mm)	187
Nominal Product Height (mm)	47
Weight (kg)	3.9

Packaging


Single packaging type	Carton
Product EAN number	5410288515274
Packaging single length / height (cm)	153.5
Packaging single width (cm)	6.5
Packaging single depth (cm)	21.0
DUN14 (outer)	05410288515274
Units per outer package	1
Packaging outer length / height (cm)	153.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	21.0

PHOTOMETRY

0.5	0.96 0.91	E(0°) 14355 E(C90) 43.7° 2752 E(C0) 42.2° 3148
1.0	1.91 1.81	E(0°) 3596 E(C90) 43.7° 693 E(C0) 42.2° 787
1.5	2.87 2.72	E(0°) 1596 E(C90) 43.7° 304 E(C0) 42.2° 350
2.0	3.82 3.63	E(0°) 899 E(C90) 43.7° 171 E(C0) 42.2° 197
2.5	4.78 4.53	E(0°) 575 E(C90) 43.7° 109 E(C0) 42.2° 129
3.0	5.73 5.44	E(0°) 400 E(C90) 43.7° 76 E(C0) 42.2° 87

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 64.4°)
— C90 - C270 (Half beam angle: 87.4°)

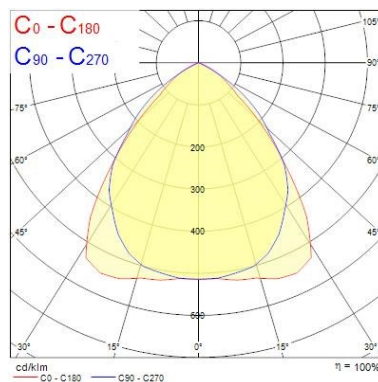

RANA LED Surface 1500
RANA LED S 1500 HO 3K LOUV+PRI W GEN2
0051527

TECHNICAL DRAWINGS

