

Start Downlight 5in1 65-260
START Downlight 5in1 65-260 1800LM
0053150



Product features

- START Downlight 5in1 is an integrated LED recessed / surface mounted downlight with built in non dimmable driver. Colour temperature (3000K, 4000K and 6500K) can be adjusted by a 3-way switch located on the back of the fixture. Adaptability to various cut-outs from 65mm to 260mm



PRODUCT OVERVIEW

Product name	START Downlight 5in1 65-260 1800LM
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Ceiling surface mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4278429
Warranty	3 years
Fixture luminous flux (lm)	1800
Luminaire efficacy (lm/W)	100
Light colour	N/A
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK05
Product EAN number	5410288531502

DATA TABLE

General data	
Product name	START Downlight 5in1 65-260 1800LM
Technology	LED
Cap/Base	N/A

Start Downlight 5in1 65-260

START Downlight 5in1 65-260 1800LM
0053150

Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Ceiling surface mounting
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001744
E-number FI	4278429
Warranty	3 years

Optical data

Fixture luminous flux (lm)	1800
Luminaire efficacy (lm/W)	100
Correlated colour temperature range (K)	3000 - 6500
Light colour	N/A
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Distribution type	Symmetric
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	18
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.7
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	85.0
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	55
Inrush Current (A)	2
Inrush Duration (µs)	100
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 16A C Breaker	62
Max. products per 16A B Breaker	34
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1.5

Lifetime data

Lifespan L70 B50	55000
Lifespan L80 B10	30000

Start Downlight 5in1 65-260

START Downlight 5in1 65-260 1800LM
0053150

Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK05
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Height (mm)	22
Nominal Product Diameter (mm)	290
Weight (kg)	0.633



Packaging

Single packaging type	Carton
Product EAN number	5410288531502
Packaging single length / height (cm)	30.6
Packaging single width (cm)	4.3
Packaging single depth (cm)	29.8
DUN14 (outer)	15410288531509
Units per outer package	8
Packaging outer length / height (cm)	36.5
Packaging outer width (cm)	32.0
Packaging outer depth (cm)	32.3


Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

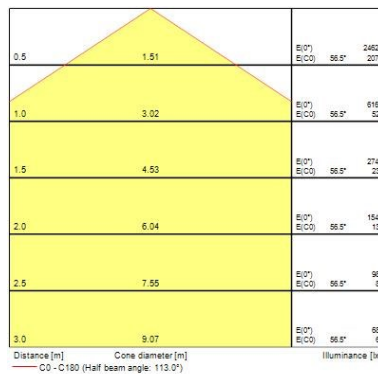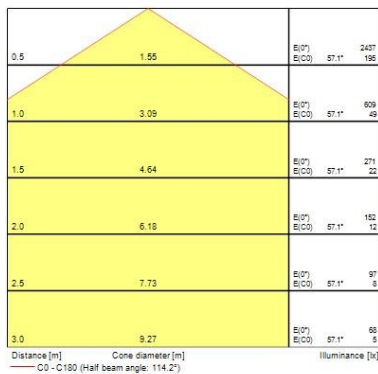

Start Downlight 5in1 65-260
START Downlight 5in1 65-260 1800LM
0053150

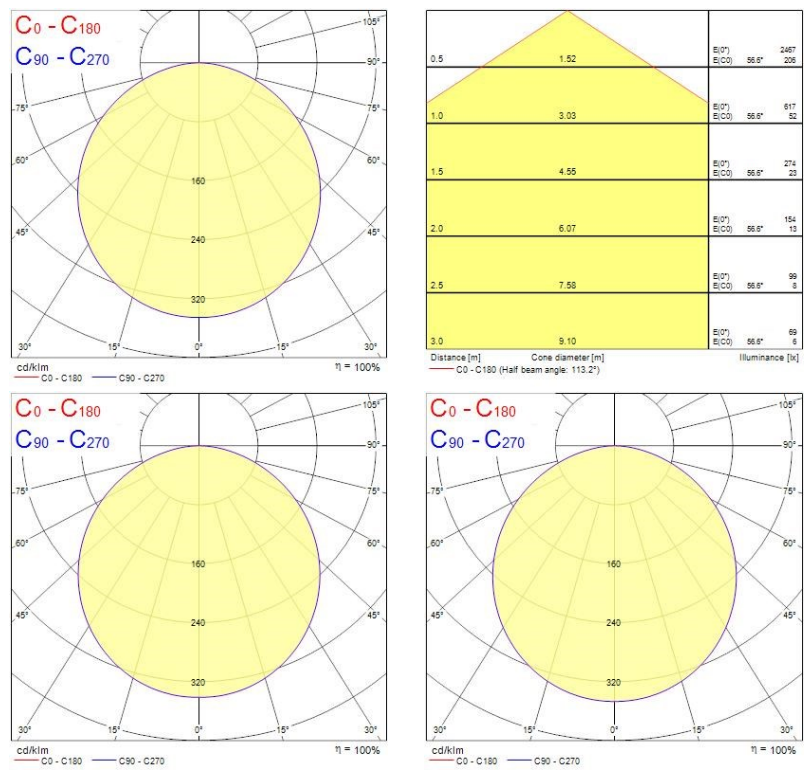

TECHNICAL DRAWINGS

