

START Downlight Eco 95mm Round Recessed
START Eco Downlight 95 640lm 830
0053910



Product features

- START Eco Downlight is an integrated LED recessed downlight with built-in non dimmable driver; Loop in loop out connector allows for quick installation; 8W; 640Lm; 80Lm/W; 3000K.



PRODUCT OVERVIEW

Product name	START Eco Downlight 95 640lm 830
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Retail
ETIM Class	EC001744
Warranty	3 years
Fixture luminous flux (lm)	640
Luminaire efficacy (lm/W)	80
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	8
Electrical protection	Class II
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288539102

DATA TABLE

General data	
Product name	START Eco Downlight 95 640lm 830
Technology	LED
Cap/Base	N/A

START Downlight Eco 95mm Round Recessed

START Eco Downlight 95 640lm 830

0053910

Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	3 years

Optical data

Fixture luminous flux (lm)	640
Luminaire efficacy (lm/W)	80
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 28
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	8
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.5
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	115.0
Electrical protection	Class II
Control gear required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	58
Inrush Current (A)	7
Inrush Duration (µs)	160
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)
Max. products per 10A C Breaker	140
Max. products per 13A C Breaker	183
Max. products per 16A C Breaker	226
Max. products per 20A C Breaker	283
Max. products per 10A B Breaker	83
Max. products per 13A B Breaker	109
Max. products per 16A B Breaker	135
Max. products per 20A B Breaker	169

START Downlight Eco 95mm Round Recessed
START Eco Downlight 95 640lm 830
0053910

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	34
Nominal Product Diameter (mm)	115
Cutout Dimensions (W x L in mm or Diameter in mm)	95
Weight (kg)	0.08


Packaging

Single packaging type	Carton
Product EAN number	5410288539102
Packaging single length / height (cm)	11.7
Packaging single width (cm)	4.0
Packaging single depth (cm)	13.0
DUN14 (outer)	15410288539109
Units per outer package	50
Packaging outer length / height (cm)	60.0
Packaging outer width (cm)	27.5
Packaging outer depth (cm)	22.0

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

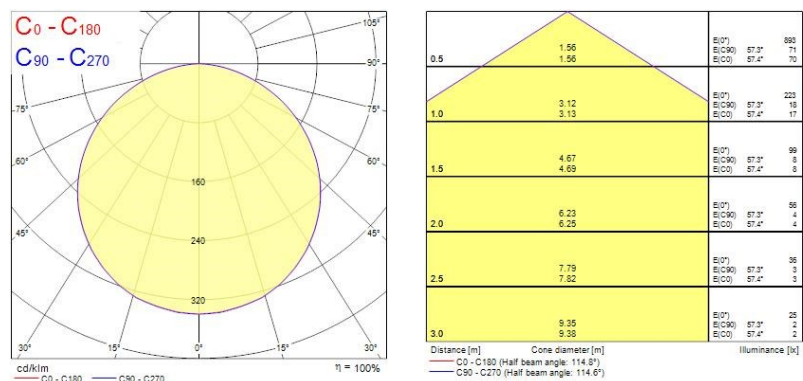

TECHNICAL DRAWINGS

START Downlight Eco 95mm Round Recessed

START Eco Downlight 95 640lm 830
0053910

