


START Flex Low Output
START Flex IP20 840 2850lm
0068101



Product features

- 5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 300 LEDs; 2850lm per 5m (570lm per 1m); 24V; 4000K; CRI80; SDCM 3;Compatible with emergency packs: 0046600, 0046601

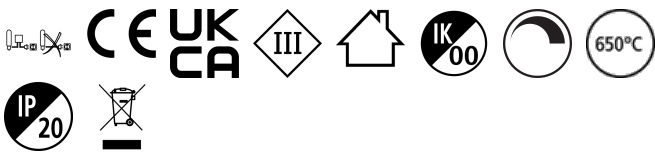

PRODUCT OVERVIEW

Product name	START Flex IP20 840 2850lm
Technology	LED
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
E-number FI	4276595
Warranty	5 years
Fixture luminous flux (lm)	2850
Luminaire efficacy (lm/W)	119
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Total power consumption (W)	24
Electrical protection	Class III
Dimmable	Yes
Dimming method	Other
IP rating	IP20
IK rating	IK00
Product EAN number	5410288681016

DATA TABLE

General data	
Product name	START Flex IP20 840 2850lm
Technology	LED
Mount	Other
General application	Hospitality, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25

START Flex Low Output

START Flex IP20 840 2850lm
0068101

ETIM Class	EC002706
E-number FI	4276595
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2850
Luminaire efficacy (lm/W)	119
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	24
Electrical protection	Class III
Control gear required	Yes
Dimmable	Yes
Dimming method	Other
Drive current (mA)	1000
Glow Wire Test (°C)	650
Lamp Energy Label (class)	F

Lifetime data

Lifespan L70 B50	54000
Lifespan L70 B10	54000
Lifespan L80 B10	50000
Lifespan L90 B10	44000

Physical data

IP rating	IP20
IK rating	IK00
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	8
Nominal Product Height (mm)	1.2
Weight (kg)	0.1

Packaging


Single packaging type	Carton
Product EAN number	5410288681016
Packaging single length / height (cm)	23.5
Packaging single width (cm)	22.5
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288681013
Units per outer package	20
Packaging outer length / height (cm)	49.0
Packaging outer width (cm)	34.0
Packaging outer depth (cm)	24.0

START Flex Low Output
START Flex IP20 840 2850lm
0068101

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

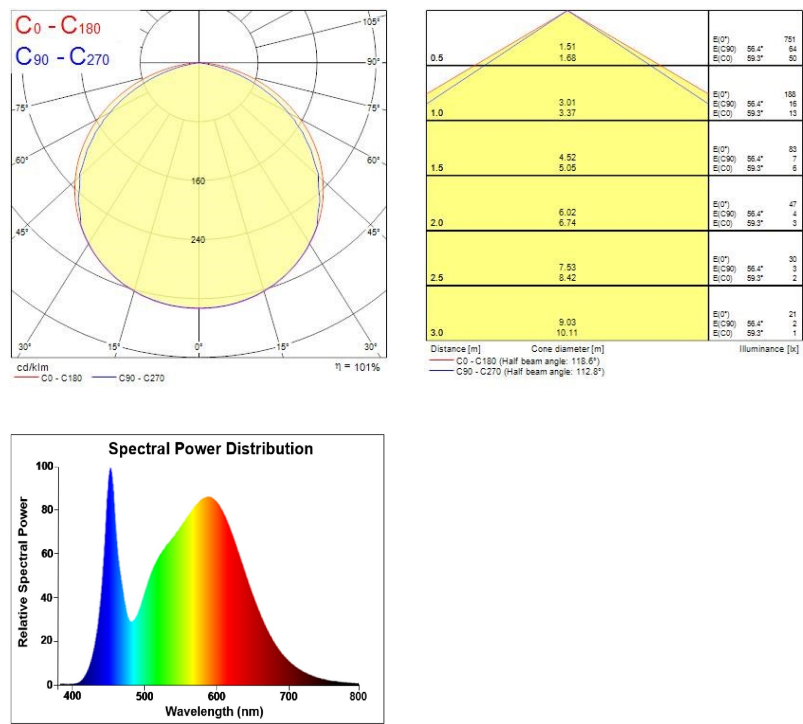


Spectral Power Distribution

Relative Spectral Power

Wavelength (nm)

TECHNICAL DRAWINGS




START Flex Low Output
START Flex IP20 840 2850lm
0068101

**ENERG**

SYLVANIA

0068101

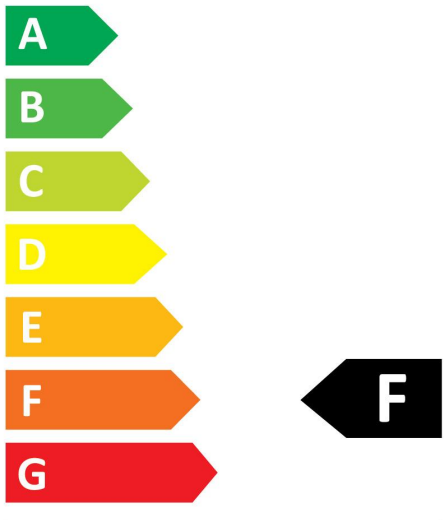


24
kWh/1000h



2019/2015

START Flex Low Output
START Flex IP20 840 2850lm
0068101

**ENERG**
SYLVANIA
0068101

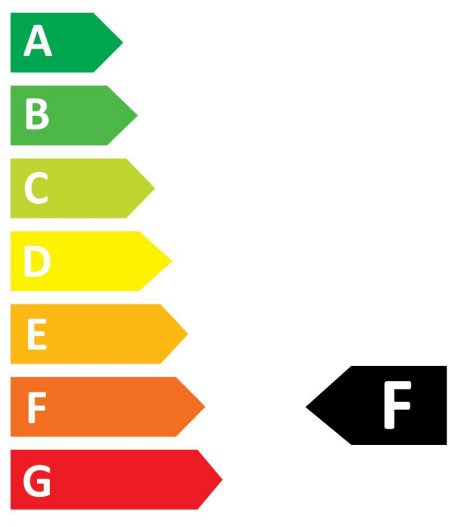

24
kWh/1000h

