

START Flex RGBW
START FLEX IP67 RGBW
0068124



- Product features
- 5 metre IP67 LED reel with pre-attached 3M adhesive type; 24V; RGBW; White colour 2700K

PRODUCT OVERVIEW

Product name	START FLEX IP67 RGBW
Technology	LED
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
E-number FI	4276990
Warranty	3 years
Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	45
Colour temperature (K)	2700
CRI (Ra)	50
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Total power consumption (W)	72
Electrical protection	Class III
Dimmable	Yes
Dimming method	Other
Housing colour	Transparent
IP rating	IP67
IK rating	IK00
Product EAN number	5410288681245

DATA TABLE

General data	
Product name	START FLEX IP67 RGBW
Technology	LED
Mount	Other
General application	Hospitality, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002706
E-number FI	4276990

START Flex RGBW

START FLEX IP67 RGBW

0068124

Warranty	3 years
----------	---------

Optical data

Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	45
Colour temperature (K)	2700
CRI (Ra)	50
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	72
Electrical protection	Class III
Control gear required	Yes
Dimmable	Yes
Dimming method	Other
Drive current (mA)	3000
Glow Wire Test (°C)	650
Lamp Energy Label (class)	G

Lifetime data

Lifespan L70 B50	30000
Lifespan L70 B10	30000
Lifespan L80 B10	30000
Lifespan L90 B10	30000

Physical data

Housing colour	Transparent
IP rating	IP67
IK rating	IK00
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	14.2
Nominal Product Height (mm)	5.4
Weight (kg)	0.35

Packaging


Single packaging type	Mix(80% carton, 20% plastic)
Product EAN number	5410288681245
Packaging single length / height (cm)	29.5
Packaging single width (cm)	27.5
Packaging single depth (cm)	3.0
DUN14 (outer)	15410288681242
Units per outer package	20
Packaging outer length / height (cm)	56.5
Packaging outer width (cm)	32.0
Packaging outer depth (cm)	31.5

START Flex RGBW
START FLEX IP67 RGBW
0068124

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

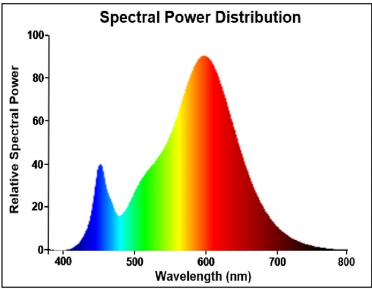


TECHNICAL DRAWINGS

START Flex RGBW
START FLEX IP67 RGBW
0068124



0068124

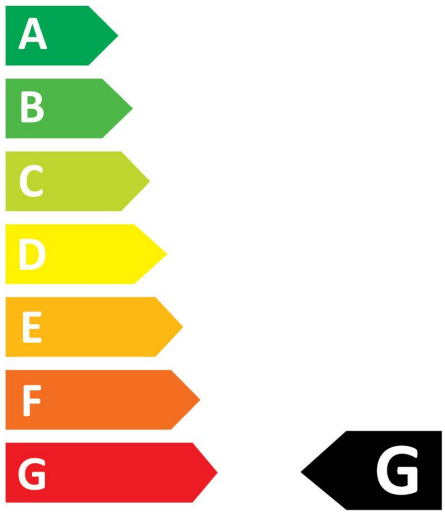


72
kWh/1000h



2019/2015

START Flex RGBW
START FLEX IP67 RGBW
0068124


SYLVANIA
0068124

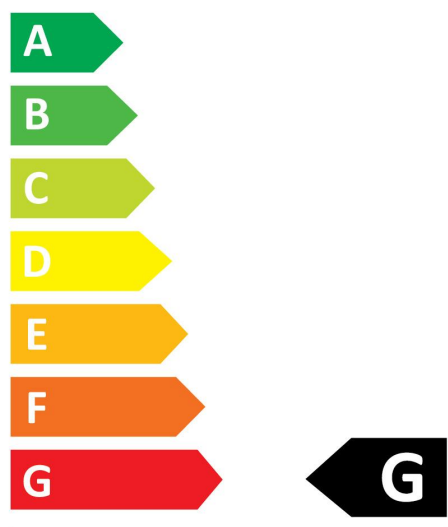

72
kWh/1000h

