

Myriad V IP65 White Bezel
MYRIAD IP65 4000K PHASE DIM WHITE
2049529



- Product features
- MYRIAD IP65 4000K PHASE DIM WHITE



PRODUCT OVERVIEW

Product name	MYRIAD IP65 4000K PHASE DIM WHITE
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number SE	7462014
E-number Norway	3290237
Warranty	5 years
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	105
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	30
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integral
Dimming method	Mains: leading / trailing edge
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768495290

DATA TABLE

General data	
Product name	MYRIAD IP65 4000K PHASE DIM WHITE

Myriad V IP65 White Bezel

MYRIAD IP65 4000K PHASE DIM WHITE

2049529

Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number SE	7462014
E-number Norway	3290237
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	105
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Symmetric
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integral
Dimming method	Mains: leading / trailing edge
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

Physical data

IP rating	IP65/20
IK rating	IK02
Diffuser material	Glass
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	76
Cutout Dimensions (W x L in mm or Diameter in mm)	75

Myriad V IP65 White Bezel



MYRIAD IP65 4000K PHASE DIM WHITE
2049529

Weight (kg)	0.39
Recessed Depth (mm)	72

Packaging

Single packaging type	Carton
Product EAN number	5025768495290
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY

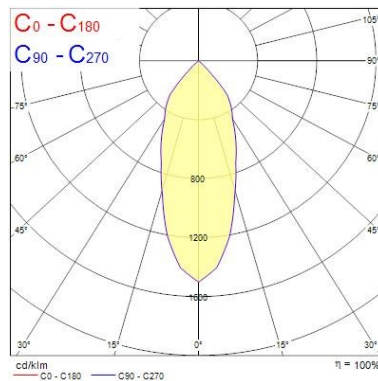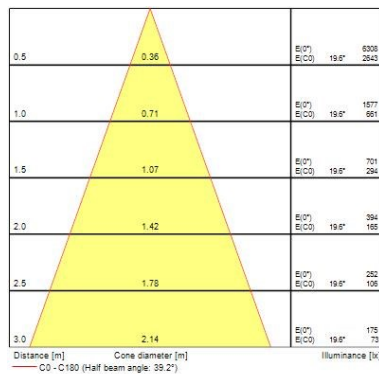

TECHNICAL DRAWINGS

