

Myriad V IP65 White Bezel
MYRIAD IP65 4000K PHASE DIM WHITE EM
2049530



- Product features
- MYRIAD IP65 4000K PHASE DIM WHITE EM



PRODUCT OVERVIEW

Product name	MYRIAD IP65 4000K PHASE DIM WHITE EM
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	88
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	30
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	347
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integral
Dimming method	Mains: leading / trailing edge
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768495306

DATA TABLE

General data	
Product name	MYRIAD IP65 4000K PHASE DIM WHITE EM

Myriad V IP65 White Bezel

MYRIAD IP65 4000K PHASE DIM WHITE EM
2049530

Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	88
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Symmetric
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	347

Electrical data

Total power consumption (W)	16
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integral
Dimming method	Mains: leading / trailing edge
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

Physical data

IP rating	IP65/20
IK rating	IK02
Diffuser material	Glass
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Cutout Dimensions (W x L in mm or Diameter in mm)	75
Weight (kg)	1.42

Myriad V IP65 White Bezel





MYRIAD IP65 4000K PHASE DIM WHITE EM
2049530

Recessed Depth (mm) 72

Packaging

Single packaging type	Carton
Product EAN number	5025768495306
Packaging single length / height (cm)	27.5
Packaging single width (cm)	25.0
Packaging single depth (cm)	12.5
DUN14 (outer)	05025768495306
Units per outer package	1
Packaging outer length / height (cm)	27.5
Packaging outer width (cm)	25.0
Packaging outer depth (cm)	12.5

PHOTOMETRY

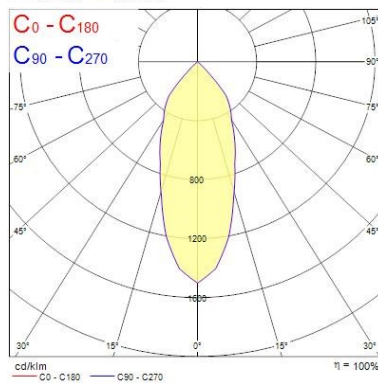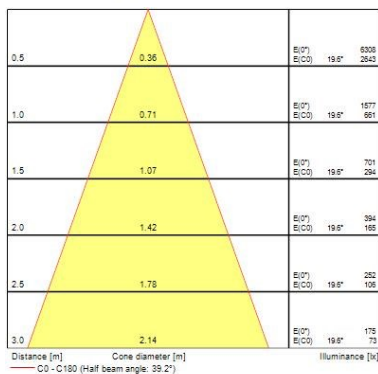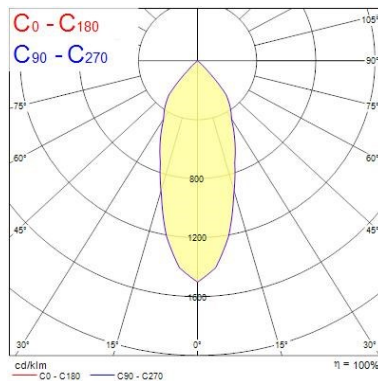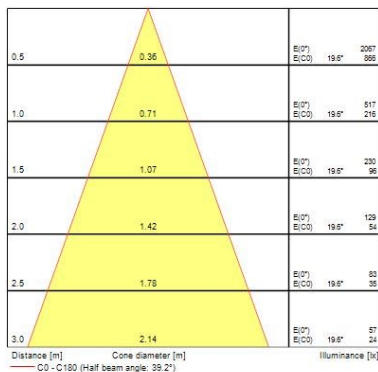

TECHNICAL DRAWINGS

Myriad V IP65 White Bezel

MYRIAD IP65 4000K PHASE DIM WHITE EM
2049530

