


Myriad V IP65 White Bezel
MYRIAD IP65 4000K DALI WHITE
2049541



- Product features
- MYRIAD IP65 4000K DALI WHITE

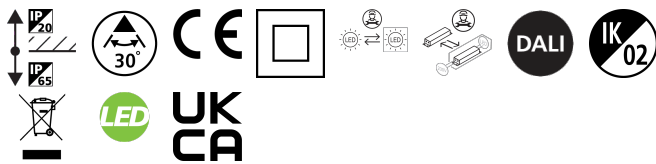

PRODUCT OVERVIEW

Product name	MYRIAD IP65 4000K DALI WHITE
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number SE	7462016
E-number Norway	3290238
Warranty	5 years
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	105
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	30
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimming method	DALI
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768495412

DATA TABLE

General data

Myriad V IP65 White Bezel

MYRIAD IP65 4000K DALI WHITE

2049541

Product name	MYRIAD IP65 4000K DALI WHITE
Technology	LED
Cap/Base	N/A
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number SE	7462016
E-number Norway	3290238
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	105
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Symmetric
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimming method	DALI
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

Physical data

IP rating	IP65/20
IK rating	IK02
Diffuser material	Glass
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	76

Myriad V IP65 White Bezel


MYRIAD IP65 4000K DALI WHITE
2049541

Cutout Dimensions (W x L in mm or Diameter in mm)	75
Weight (kg)	0.39
Recessed Depth (mm)	72

Packaging

Single packaging type	Carton
Product EAN number	5025768495412
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY

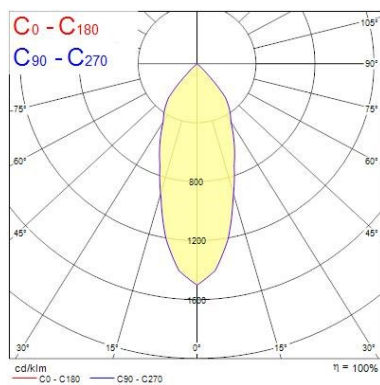

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.36	19.6°	6308
1.0	0.71	19.6°	1577
1.5	1.07	19.6°	701
2.0	1.42	19.6°	394
2.5	1.78	19.6°	252
3.0	2.14	19.6°	175

TECHNICAL DRAWINGS

