


Colossal 400 OPAL
COLOSSAL 400mm 830 OPAL DIR+HAL WHITE SSC
2071135



Product features

- 400mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct/indirect (halo) light distribution, 2550lm luminous flux, 20.5W system power, 124lm/W luminaire efficacy. Sylsmart Standalone enabled. Colour rendering index Ra >80, 3000K Warm White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 450mA drive current. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.

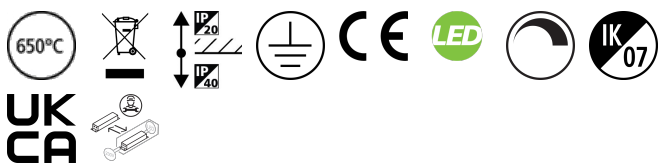

PRODUCT OVERVIEW

Product name	COLOSSAL 400mm 830 OPAL DIR+HAL WHITE SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	2550
Luminaire efficacy (lm/W)	124
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	20.5
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768711352

DATA TABLE

General data	
Product name	COLOSSAL 400mm 830 OPAL DIR+HAL WHITE SSC

Colossal 400 OPAL

COLOSSAL 400mm 830 OPAL DIR+HAL WHITE SSC

2071135

Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Office
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2550
Luminaire efficacy (lm/W)	124
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 23
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	20.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
Drive current (mA)	450
Inrush Current (A)	20
Inrush Duration (µs)	25
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	57
Max. products per 13A C Breaker	71
Max. products per 16A C Breaker	93
Max. products per 20A C Breaker	114
Max. products per 10A B Breaker	35
Max. products per 13A B Breaker	45

Colossal 400 OPAL

COLOSSAL 400mm 830 OPAL DIR+HAL WHITE SSC

2071135

Max. products per 16A B Breaker	55
Max. products per 20A B Breaker	68
Connectable conductor cross section - Min (mm²)	1.5
Connectable conductor cross section - Max (mm²)	1.5

Lifetime data

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	93
Nominal Product Diameter (mm)	400
Weight (kg)	6.5

Packaging

Single packaging type	Carton
Product EAN number	5025768711352
Packaging single length / height (cm)	14.0
Packaging single width (cm)	47.0
Packaging single depth (cm)	47.0
DUN14 (outer)	05025768711352
Units per outer package	1
Packaging outer length / height (cm)	14.0
Packaging outer width (cm)	47.0
Packaging outer depth (cm)	47.0


Safety data

Optimal operating condition (°C)	10-25
----------------------------------	-------

PHOTOMETRY

Colossal 400 OPAL
COLOSSAL 400mm 830 OPAL DIR+HAL WHITE SSC
2071135

		E(0°) E(C0)		54.7°	3672 355
0.5	1.41	E(0°) E(C0)	54.7°	918 89	
1.0	2.82	E(0°) E(C0)	54.7°	408 39	
1.5	4.24	E(0°) E(C0)	54.7°	230 22	
2.0	5.65	E(0°) E(C0)	54.7°	147 14	
2.5	7.06	E(0°) E(C0)	54.7°	102 10	
3.0	8.47	E(0°) E(C0)	54.7°		
Distance[m]		Cone diameter[m]		Illuminance [lx]	
C0 - C180 (Half beam angle: 105.4°)					

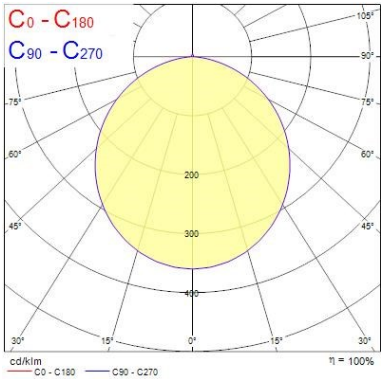

TECHNICAL DRAWINGS

