

Colossal 400 OPAL
COLOSSAL 400mm 840 OPAL DIR+HAL WHITE EM
2071142



Product features

- 400mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct/indirect (halo) light distribution, 2680lm luminous flux, 21.2W system power, 126lm/W luminaire efficacy. Constant current driver. 3 hours integrated emergency. Colour rendering index Ra >80, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 450mA drive current. Electrical protection Class I, 220-240V. Reported lifetime 66k hours L90B10.



PRODUCT OVERVIEW

Product name	COLOSSAL 400mm 840 OPAL DIR+HAL WHITE EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	2680
Luminaire efficacy (lm/W)	123
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	21.9
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768711420

DATA TABLE

General data

Product name	COLOSSAL 400mm 840 OPAL DIR+HAL WHITE EM
--------------	--

Colossal 400 OPAL

COLOSSAL 400mm 840 OPAL DIR+HAL WHITE EM

2071142

Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Office
Operating temperature range (°C)	10°C...+25°C
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2680
Luminaire efficacy (lm/W)	123
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG0
Emergency duration (h)	3

Electrical data

Total power consumption (W)	21.9
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	450
Inrush Current (A)	28
Inrush Duration (µs)	139
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	31
Max. products per 13A C Breaker	41
Max. products per 16A C Breaker	51
Max. products per 20A C Breaker	70
Max. products per 10A B Breaker	19
Max. products per 13A B Breaker	25
Max. products per 16A B Breaker	31

Colossal 400 OPAL

COLOSSAL 400mm 840 OPAL DIR+HAL WHITE EM

2071142

Max. products per 20A B Breaker	42
Connectable conductor cross section - Min (mm²)	1.5
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	93
Nominal Product Diameter (mm)	400
Weight (kg)	6.8

Packaging


Single packaging type	Carton
Product EAN number	5025768711420
Packaging single length / height (cm)	14.0
Packaging single width (cm)	47.0
Packaging single depth (cm)	47.0
DUN14 (outer)	05025768711420
Units per outer package	1
Packaging outer length / height (cm)	14.0
Packaging outer width (cm)	47.0
Packaging outer depth (cm)	47.0

Safety data

Optimal operating condition (°C)	10-25
----------------------------------	-------

PHOTOMETRY

Colossal 400 OPAL
COLOSSAL 400mm 840 OPAL DIR+HAL WHITE EM
2071142

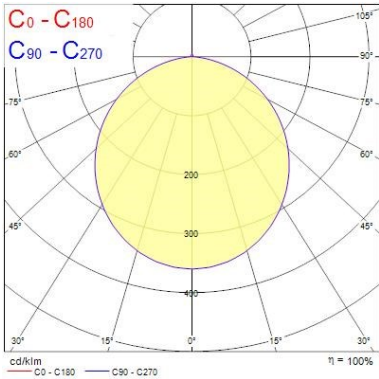

0.5	1.41	E(0°) E(C0)	54.7°	3880 373
1.0	2.82	E(0°) E(C0)	54.7°	965 90
1.5	4.24	E(0°) E(C0)	54.7°	439 41
2.0	5.65	E(0°) E(C0)	54.7°	241 23
2.5	7.06	E(0°) E(C0)	54.7°	154 15
3.0	8.47	E(0°) E(C0)	54.7°	107 10

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 105.4°)

TECHNICAL DRAWINGS

