

Colossal 600 OPAL

COLOSSAL 600mm 840 OPAL DIR+HAL WHITE DALI EM

2071212



Product features

- 600mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct/indirect (halo) light distribution, 5445lm luminuous flux, 41W system power, 133lm/W luminiaire efficacy. DALI dimmable. 3 hours integrated emergency. Colour rendering index Ra >80, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 450mA drive current. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.



PRODUCT OVERVIEW

Product name	COLOSSAL 600mm 840 OPAL DIR+HAL WHITE DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	5445
Luminous flux (lm)	5445
Luminaire efficacy (lm/W)	133
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	41
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768712120

DATA TABLE

Colossal 600 OPAL

COLOSSAL 600mm 840 OPAL DIR+HAL WHITE DALI EM

2071212

General data

Product name	COLOSSAL 600mm 840 OPAL DIR+HAL WHITE DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
General application	Hospitality, Office
Operating temperature range (°C)	10°C...+25°C
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	5445
Luminous flux (lm)	5445
Luminaire efficacy (lm/W)	133
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 23
Photobiological Risk Group	RG0
Emergency duration (h)	3

Electrical data

Total power consumption (W)	41
Primary Supply/Product voltage - min (V)	198.0
Primary Supply/Product voltage - max (V)	264.0
Lamp power factor	0.99
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	4.7
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Drive current (mA)	450
Inrush Current (A)	23
Inrush Duration (µs)	174
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	35
Max. products per 20A C Breaker	45

Colossal 600 OPAL

COLOSSAL 600mm 840 OPAL DIR+HAL WHITE DALI EM
2071212

Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	21
Max. products per 20A B Breaker	27
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	93
Nominal Product Diameter (mm)	604
Weight (kg)	9.3

Packaging


Single packaging type	Carton
Product EAN number	5025768712120
Packaging single length / height (cm)	14.0
Packaging single width (cm)	68.0
Packaging single depth (cm)	68.0
DUN14 (outer)	05025768712120
Units per outer package	1
Packaging outer length / height (cm)	14.0
Packaging outer width (cm)	68.0
Packaging outer depth (cm)	68.0

Safety data

Optimal operating condition (°C)	10-25
----------------------------------	-------

PHOTOMETRY

Colossal 600 OPAL
COLOSSAL 600mm 840 OPAL DIR+HAL WHITE DALI EM
2071212

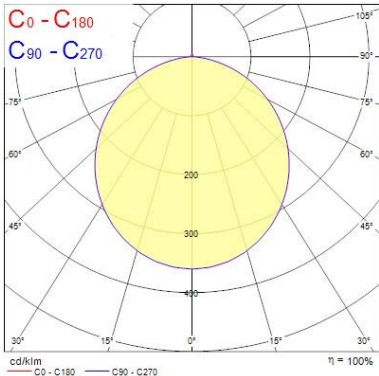

0.5	1.41	E(0°) E(C0)	54.7°	7541 758
1.0	2.82	E(0°) E(C0)	54.7°	1960 190
1.5	4.24	E(0°) E(C0)	54.7°	871 84
2.0	5.65	E(0°) E(C0)	54.7°	490 47
2.5	7.06	E(0°) E(C0)	54.7°	314 30
3.0	8.47	E(0°) E(C0)	54.7°	218 21

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 105.4°)

TECHNICAL DRAWINGS

