

Colossal 1200 OPAL

COLOSSAL 1200mm 830 OPAL DIR WHITE DALI
2071281



Product features

- 1200mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct light distribution, 20975lm luminous flux, 153.6W system power, 137lm/W luminaire efficacy. DALI dimmable. Colour rendering index Ra >80, 3000K Warm White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40/IP20, IK03. 450mA drive current. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.



PRODUCT OVERVIEW

Product name	COLOSSAL 1200mm 830 OPAL DIR WHITE DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	20975
Luminaire efficacy (lm/W)	137
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	153.6
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768712816

DATA TABLE

General data

Product name	COLOSSAL 1200mm 830 OPAL DIR WHITE DALI
--------------	---

Colossal 1200 OPAL

COLOSSAL 1200mm 830 OPAL DIR WHITE DALI
2071281

Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality, Office
Operating temperature range (°C)	5°C...+25°C
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	20975
Luminaire efficacy (lm/W)	137
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 23
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	153.6
Current (A)	450
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	450
Inrush Current (A)	25
Inrush Duration (µs)	280
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	B, B(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	24
Max. products per 13A C Breaker	31
Max. products per 16A C Breaker	40
Max. products per 20A C Breaker	49
Max. products per 10A B Breaker	13
Max. products per 16A B Breaker	24
Max. products per 20A B Breaker	30

Colossal 1200 OPAL

COLOSSAL 1200mm 830 OPAL DIR WHITE DALI
2071281

Connectable conductor cross section - Min (mm²)	1.5
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	93
Nominal Product Diameter (mm)	1168
Weight (kg)	23.0


Packaging

Single packaging type	Carton
Product EAN number	5025768712816
Packaging single length / height (cm)	14.0
Packaging single width (cm)	123.0
Packaging single depth (cm)	123.0
DUN14 (outer)	05025768712816
Units per outer package	1
Packaging outer length / height (cm)	14.0
Packaging outer width (cm)	123.0
Packaging outer depth (cm)	123.0

Safety data

Optimal operating condition (°C)	5-25
----------------------------------	------

PHOTOMETRY

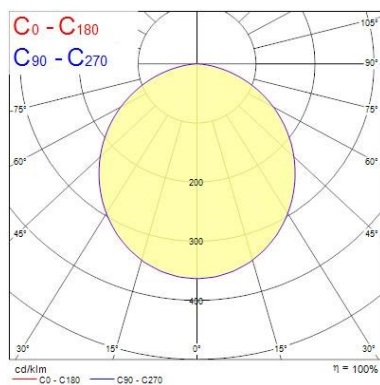

Distance [m]	Cone diameter [m]	E (0°) [lx]	E (C0) [lx]	E (C90) [lx]
0.5	1.42	32483	54.8°	2920
1.0	2.84	7821	54.8°	730
1.5	4.25	3387	54.8°	324
2.0	5.67	1905	54.8°	183
2.5	7.09	1219	54.8°	117
3.0	8.51	847	54.8°	81

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 105.6°)

Colossal 1200 OPAL

COLOSSAL 1200mm 830 OPAL DIR WHITE DALI
2071281

TECHNICAL DRAWINGS

