

Start Spot Alu IP65  
START SPOT ALUMINIUM 740LM 830 IP65 WHT  
0005174



Product features

- Integrated LED recessed spotlight, white bezel colour, white reflector, 740lm, 9.0W, dimmable trailing/leading edge, 3000K, 40° degree beam angle, polycarbonate and aluminium body, low profile 62mm recessed depth, IP65 from the front, IK03, loop-in/loop-out terminals for fast wiring, weight 0,165Kg, 85mm bezel diameter, 68-72mm cutout, clear lens.




PRODUCT OVERVIEW

|                                 |                                         |
|---------------------------------|-----------------------------------------|
| Product name                    | START SPOT ALUMINIUM 740LM 830 IP65 WHT |
| Technology                      | LED                                     |
| Cap/Base                        | N/A                                     |
| Housing                         | Aluminium                               |
| Mount                           | Ceiling recessed mounting               |
| General application             | Residential & Consumer                  |
| ETIM Class                      | EC001744                                |
| Warranty                        | 3 years                                 |
| Fixture luminous flux (lm)      | 740                                     |
| Luminaire efficacy (lm/W)       | 82                                      |
| Colour temperature (K)          | 3000                                    |
| Colour Code                     | 830                                     |
| Light colour                    | Warm White                              |
| CRI (Ra)                        | 80                                      |
| Colour Variation Initial (SDCM) | SDCM5                                   |
| Beam Angle (°)                  | 40                                      |
| Photobiological Risk Group      | RG1                                     |
| Total power consumption (W)     | 9                                       |
| Electrical protection           | Class II                                |
| Control gear type               | LED driver constant current             |
| Dimmable                        | Yes                                     |
| Dimming method                  | Mains: leading / trailing edge          |
| Minimum dimming level (%)       | 10                                      |
| LED Flickering Rate             | Low (6% - 20%)                          |
| Housing colour                  | RAL 9016 - Traffic white / Bezel        |
| IP rating                       | IP65/20                                 |
| IK rating                       | IK07                                    |
| Product EAN number              | 5410288051741                           |

PHOTOMETRY

Start Spot Alu IP65  
START SPOT ALUMINIUM 740LM 830 IP65 WHT  
0005174

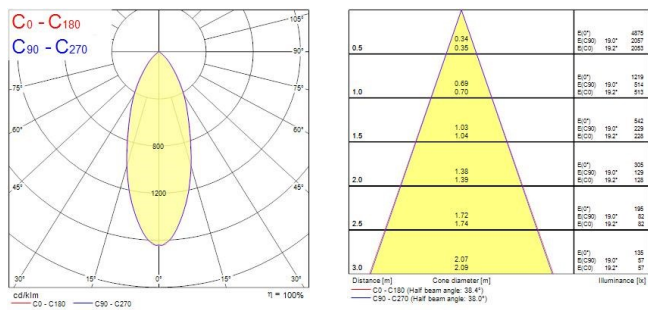

TECHNICAL DRAWINGS

