




- **Resisto**, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 5000lm; 38W; 132lm/W; 4000K; SDCM<5; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark; SylSmart Standalone enabled.



PHOTOMETRY

Resisto SylSmart
Resisto 1200 IP66 5000lm 840 SSC
0010227

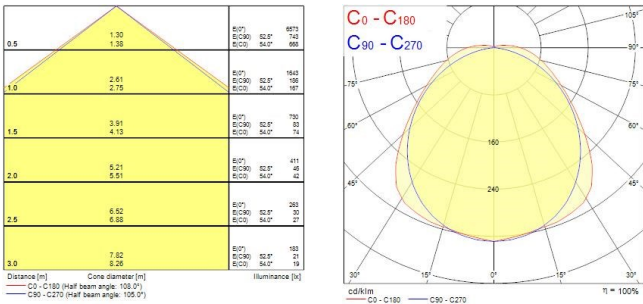

TECHNICAL DRAWINGS

