


Resisto SylSmart  
Resisto 1500 HE IP65 4000lm 840 SSE  
0010276



Product features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 4000lm; 26W; 154lm/W; 4000K; SDCM<5; CRI80; IP66; IK08 (sensor IK03); Class I; 69,000hrs (L80B20) lifespan; 1593mm x 87mm x 80mm; D-mark; SylSmart Connected Industry enabled.

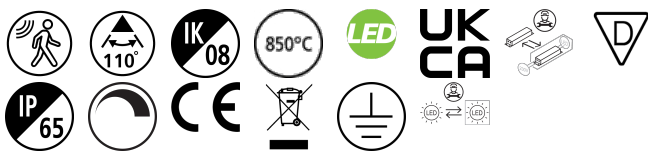


PRODUCT OVERVIEW

|                                 |                                                           |
|---------------------------------|-----------------------------------------------------------|
| Product name                    | Resisto 1500 HE IP65 4000lm 840 SSE                       |
| Technology                      | LED                                                       |
| Cap/Base                        | N/A                                                       |
| Housing                         | PC Polycarbonate                                          |
| Mount                           | Ceiling surface mounting, Suspended, Wall surface mounted |
| General application             | Logistics & Industry                                      |
| ETIM Class                      | EC002892                                                  |
| Warranty                        | 5 years                                                   |
| Fixture luminous flux (lm)      | 4000                                                      |
| Luminaire efficacy (lm/W)       | 154                                                       |
| Colour temperature (K)          | 4000                                                      |
| CRI (Ra)                        | 80                                                        |
| Colour Variation Initial (SDCM) | SDCM3                                                     |
| Colour Consistency (SDCM)       | 3                                                         |
| Beam Angle (°)                  | 110                                                       |
| Glare control                   | < 23                                                      |
| Photobiological Risk Group      | RG1                                                       |
| Total power consumption (W)     | 26                                                        |
| Electrical protection           | Class I                                                   |
| Control gear type               | LED driver constant current                               |
| Dimmable                        | Yes                                                       |
| Dimming method                  | SylSmart SSE                                              |
| Minimum dimming level (%)       | 1                                                         |
| LED Flickering Rate             | Ultra low (5% or less)                                    |
| Housing colour                  | Grey                                                      |
| IP rating                       | IP65                                                      |
| IK rating                       | IK08                                                      |
| Product EAN number              | 5410288102764                                             |

PHOTOMETRY

**Resisto SylSmart**  
*Resisto 1500 HE IP65 4000lm 840 SSE*  
**0010276**

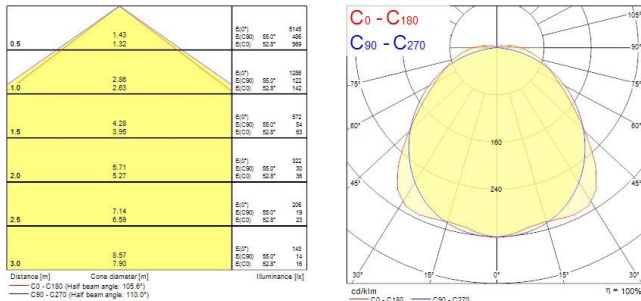

## TECHNICAL DRAWINGS

