

Isoline DALI
ISOLINE 1690MM 4K MD UGR DA 8C
0042523

Image not found.

Product features


- Isoline LED linear DALI dimmable luminaire for industrial and commercial applications. 1690 mm length with medium optics provide homogenous light distribution for aisles and focus areas. Suitable for DALI Dimming. Aluminium housing, RAL 9016. Max + 35 °C operating temperature range, 4000 K, CRI 80, UGR <20, 3 SDCM. 56 W power consumption, 8800 lm luminous flux, 157 lm/W efficacy, 1690 mm x 62 mm x 59 mm (L x W x H) dimensions, IP20, IK03, DC 50/60 Hz, Class I. Lifespan L70:B50 60,000 hours.

PRODUCT OVERVIEW

Product name	ISOLINE 1690MM 4K MD UGR DA 8C
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC000986
Warranty	5 years
Fixture luminous flux (lm)	8800
Luminous flux (lm)	8800
Luminaire efficacy (lm/W)	157
Colour temperature (K)	4000
Colour Code	840
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Glare control	< 20
Photobiological Risk Group	RG1
Total power consumption (W)	56
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Product EAN number	5410288425238

PHOTOMETRY

Isoline DALI
ISOLINE 1690MM 4K MD UGR DA 8C
0042523

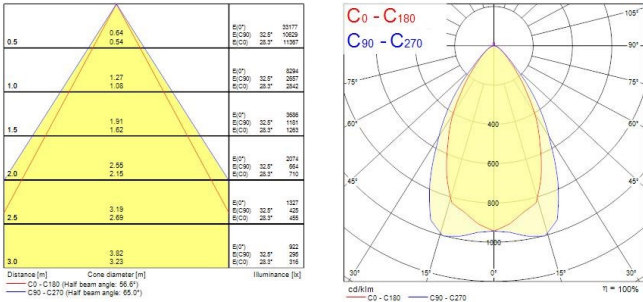

TECHNICAL DRAWINGS