


Isoline DALI  
ISOLINE 1690MM 4K ASYR DA 8C  
0042529



Product features

- Isoline LED linear DALI dimmable luminaire for industrial and commercial applications. 1690 mm length with asymmetrical (Right) optics provide homogenous light distribution for wide, shelf areas. Suitable for DALI Dimming. Aluminium housing, RAL 9016. Max + 35 °C operating temperature range, 4000 K, CRI 80, 3 SDCM. 56 W power consumption, 8000 lm luminous flux, 143 lm/W efficacy, 1690 mm x 62 mm x 59 mm (L x W x H) dimensions, IP20, IK03, DC 50/60 Hz, Class I. Lifespan L70:B50 60,000 hours.

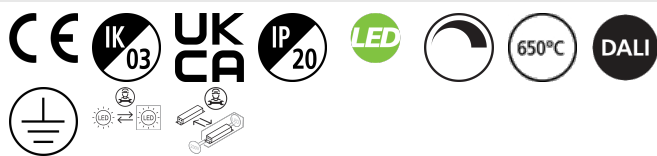


PRODUCT OVERVIEW

|                                 |                                  |
|---------------------------------|----------------------------------|
| Product name                    | ISOLINE 1690MM 4K ASYR DA 8C     |
| Technology                      | LED                              |
| Cap/Base                        | N/A                              |
| Housing                         | Aluminium                        |
| Mount                           | Suspended                        |
| Fixture rating                  | Enclosed                         |
| General application             | Logistics & Industry             |
| ETIM Class                      | EC000986                         |
| Warranty                        | 5 years                          |
| Fixture luminous flux (lm)      | 8000                             |
| Luminous flux (lm)              | 8000                             |
| Luminaire efficacy (lm/W)       | 143                              |
| Colour temperature (K)          | 4000                             |
| Colour Code                     | 840                              |
| CRI (Ra)                        | 80                               |
| Colour Variation Initial (SDCM) | SDCM3                            |
| Photobiological Risk Group      | RG1                              |
| Total power consumption (W)     | 56                               |
| Electrical protection           | Class I                          |
| Control gear type               | LED driver constant current      |
| Dimmable                        | Yes                              |
| Dimming method                  | DALI                             |
| Minimum dimming level (%)       | 1                                |
| LED Flickering Rate             | Ultra low (5% or less)           |
| Housing colour                  | RAL 9016 - Traffic white / Bezel |
| IP rating                       | IP20                             |
| IK rating                       | IK03                             |
| Product EAN number              | 5410288425290                    |

PHOTOMETRY

**Isoline DALI**  
*ISOLINE 1690MM 4K ASYR DA 8C*  
**0042529**



**TECHNICAL DRAWINGS**

