

Rail & Trunk System - Electronic inserts
RTS 1500MM 70W 5-WIRE DOUBLE ASYM WHITE
0042584



Product features

- RTS LED linear luminaire for industrial and commercial applications. 1500 mm lenght with double asymmetrical optics provide homogenous light distribution for wide, shelf areas. Steel housing, White color, -25 ... +30 °C operating temperature range, 4000 K, CRI 80, 3 SDMC. 70 W power consumption, 11200 lm luminous flux, 160 lm/W efficacy, 1500 mm x 70.2 mm x 78.6 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 120,000 hours.




PRODUCT OVERVIEW


Product name	RTS 1500MM 70W 5-WIRE DOUBLE ASYM WHITE
Technology	LED
Cap/Base	N/A
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC000986
Warranty	5 years
Fixture luminous flux (lm)	11200
Luminaire efficacy (lm/W)	160
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1
Total power consumption (W)	70
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288425849

PHOTOMETRY

Rail & Trunk System - Electronic inserts
RTS 1500MM 70W 5-WIRE DOUBLE ASYM WHITE
0042584

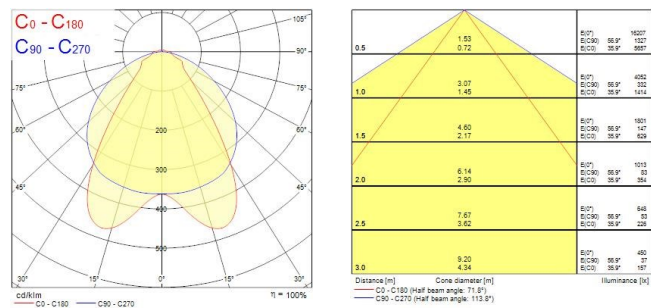

TECHNICAL DRAWINGS



L 600 900 1202 1500 2403 3000 3605 4500