

START Panel Flat UGR19 600x600  
START Panel Flat UGR19 600x600 840 SSH  
0047040



Product features

- Edge lit LED flat panel. SYLSMART Connected Building - Fully wireless, adaptive, dynamic smart system. 32 W, Neutral White, 4000 K, 3500 lumens, 109 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic driver. (HxWxD) 50 x 596 x 596 mm




PRODUCT OVERVIEW

|                                 |                                                                |
|---------------------------------|----------------------------------------------------------------|
| Product name                    | START Panel Flat UGR19 600x600 840 SSH                         |
| Technology                      | LED                                                            |
| Housing                         | Steel                                                          |
| Mount                           | Ceiling recessed mounting, Ceiling surface mounting, Suspended |
| Environment                     | Interior                                                       |
| General application             | Education, Office                                              |
| ETIM Class                      | EC002892                                                       |
| Warranty                        | 5 years                                                        |
| Fixture luminous flux (lm)      | 3500                                                           |
| Luminous flux (lm)              | 3450                                                           |
| Luminaire efficacy (lm/W)       | 109.3                                                          |
| LOR (%)                         | 100                                                            |
| Colour temperature (K)          | 4000                                                           |
| Light colour                    | Neutral White                                                  |
| CRI (Ra)                        | 80                                                             |
| Colour Variation Initial (SDCM) | SDCM3                                                          |
| Beam Angle (°)                  | 90                                                             |
| Glare control                   | < 19                                                           |
| Photobiological Risk Group      | RG0                                                            |
| Total power consumption (W)     | 32                                                             |
| Electrical protection           | Class II                                                       |
| Control gear type               | LED driver constant current                                    |
| Dimmable                        | Yes                                                            |
| Dimming method                  | SylSmart SSH                                                   |
| Minimum dimming level (%)       | 1                                                              |
| LED Flickering Rate             | Ultra low (5% or less)                                         |
| Housing colour                  | White                                                          |
| IP rating                       | IP40/20                                                        |
| IK rating                       | IK06                                                           |
| Product EAN number              | 5410288470405                                                  |

START Panel Flat UGR19 600x600  
START Panel Flat UGR19 600x600 840 SSH  
0047040

PHOTOMETRY

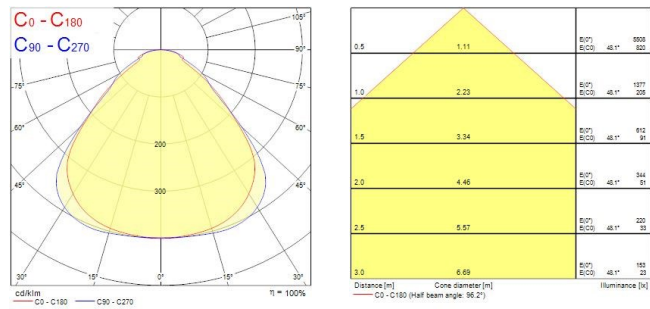

TECHNICAL DRAWINGS

