


Sylproof Superia LED G3 DALI  
SYLPROOF SUPERIA LED G3 1500mm Twin 4K QC DALI  
0048753



Product features

- Sylproof Superia, integrated LED weatherproof luminaire with quick connector, UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. Polycarbonate housing, Polycarbonate diffuser, DALI dimmable, 4000K, CRI80, 7100 lm, 47 W, 145 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I,IK08, IP65.

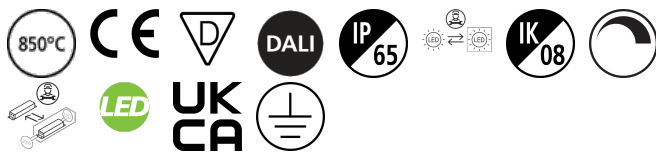


PRODUCT OVERVIEW

|                                 |                                                |
|---------------------------------|------------------------------------------------|
| Product name                    | SYLPROOF SUPERIA LED G3 1500mm Twin 4K QC DALI |
| Technology                      | LED                                            |
| Cap/Base                        | N/A                                            |
| Housing                         | PC Polycarbonate                               |
| Mount                           | Ceiling surface mounting                       |
| Fixture rating                  | Enclosed                                       |
| General application             | Logistics & Industry                           |
| ETIM Class                      | EC000109                                       |
| Warranty                        | 5 years                                        |
| Fixture luminous flux (lm)      | 7100                                           |
| Luminaire efficacy (lm/W)       | 145                                            |
| Colour temperature (K)          | 4000                                           |
| Light colour                    | Neutral White                                  |
| CRI (Ra)                        | 80                                             |
| Colour Variation Initial (SDCM) | SDCM3                                          |
| Beam Angle (°)                  | 100                                            |
| Photobiological Risk Group      | RG1                                            |
| Total power consumption (W)     | 47                                             |
| Electrical protection           | Class I                                        |
| Control gear type               | Electronic ballast                             |
| Dimmable                        | Yes                                            |
| Dimming method                  | DALI                                           |
| Minimum dimming level (%)       | 1                                              |
| Housing colour                  | Grey                                           |
| IP rating                       | IP65                                           |
| IK rating                       | IK08                                           |
| Product EAN number              | 5410288487533                                  |

PHOTOMETRY

**Sylproof Superia LED G3 DALI**  
*SYLPROOF SUPERIA LED G3 1500mm Twin 4K QC DALI*  
**0048753**

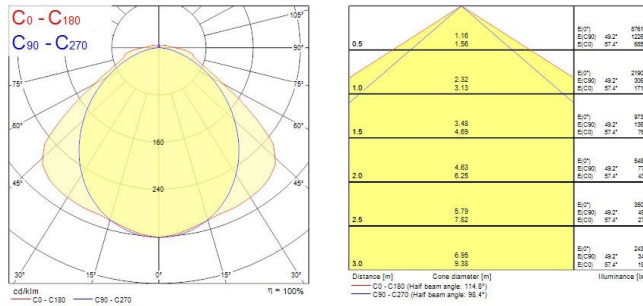

## TECHNICAL DRAWINGS

