

Wayline with Microwave sensor Wayline 1200 MW 5700lm 840 0048933



Product features

LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability, steel housing, 5700lm, 41W, 139lm/W, 4000K, CRI80, 3 step MacAdam ellipse, symmetric wide beam angle, Class I, 90000 hrs L80B20 lifespan, non-dimmable driver, MW sensor for 360° detection up to 8m range at 6m mounting height, IK08, IP20, 1220 x 70 x 76.5mm (LxWxD) dimensions, 1.47kg weight.




















PRODUCT OVERVIEW

| Product name | Wayline 1200 MW 5700lm 840 |
|---------------------------------|----------------------------------|
| Technology | LED |
| Cap/Base | N/A |
| Housing | Steel |
| General application | Logistics & Industry |
| ETIM Class | EC000109 |
| E-number FI | 4278323 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 5700 |
| Luminaire efficacy (lm/W) | 139 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Beam Angle (°) | 115 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 41 |
| Electrical protection | Class I |
| Dimmable | No |
| Dimming method | N/A |
| LED Flickering Rate | Low (6% - 20%) |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP20 |
| IK rating | IK08 |
| Product EAN number | 5410288489339 |
| | |

PHOTOMETRY



Wayline with Microwave sensor Wayline 1200 MW 5700lm 840 0048933

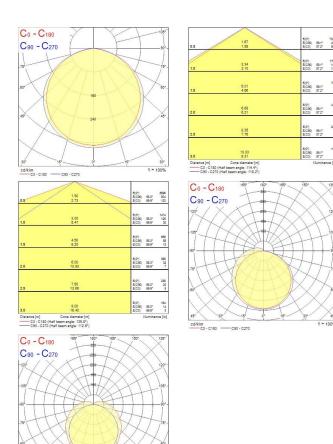

TECHNICAL DRAWINGS

