

START Downlight Eco 95mm Round Recessed
START Eco Downlight 95 640lm 830
0053910



Product features

- START Eco Downlight is an integrated LED recessed downlight with built-in non dimmable driver; Loop in loop out connector allows for quick installation; 8W; 640Lm; 80Lm/W; 3000K.




PRODUCT OVERVIEW

Product name	START Eco Downlight 95 640lm 830
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Retail
ETIM Class	EC001744
Warranty	3 years
Fixture luminous flux (lm)	640
Luminaire efficacy (lm/W)	80
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	8
Electrical protection	Class II
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288539102

PHOTOMETRY

START Downlight Eco 95mm Round Recessed
START Eco Downlight 95 640lm 830
0053910

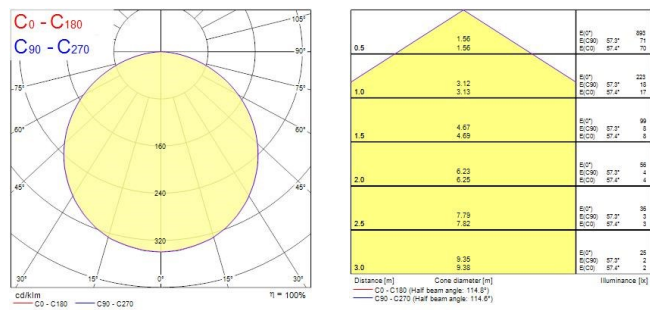

TECHNICAL DRAWINGS

