

START Downlight Eco145mm Round Recessed  
START eco Downlight 145 950lm 840  
0053915



Product features

- START eco Downlight is an integrated LED recessed downlight with built-in non dimmable driver; Loop in loop out connector allows for quick installation; 12W; 950Lm; 79Lm/W; 4000K.




PRODUCT OVERVIEW

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Product name                    | START eco Downlight 145 950lm 840 |
| Technology                      | LED                               |
| Cap/Base                        | N/A                               |
| Housing                         | PC Polycarbonate                  |
| Mount                           | Ceiling recessed mounting         |
| General application             | Retail                            |
| ETIM Class                      | EC001744                          |
| Warranty                        | 3 years                           |
| Fixture luminous flux (lm)      | 950                               |
| Luminaire efficacy (lm/W)       | 79                                |
| Colour temperature (K)          | 4000                              |
| Light colour                    | Neutral White                     |
| CRI (Ra)                        | 80                                |
| Colour Variation Initial (SDCM) | SDCM6                             |
| Beam Angle (°)                  | 110                               |
| Glare control                   | < 28                              |
| Photobiological Risk Group      | RG0                               |
| Total power consumption (W)     | 12                                |
| Electrical protection           | Class II                          |
| Dimmable                        | No                                |
| Dimming method                  | N/A                               |
| LED Flickering Rate             | Medium (21% - 40%)                |
| Housing colour                  | RAL 9003 - Signal white           |
| IP rating                       | IP20                              |
| IK rating                       | IK02                              |
| Product EAN number              | 5410288539157                     |

PHOTOMETRY

START Downlight Eco145mm Round Recessed  
*START eco Downlight 145 950lm 840*  
**0053915**

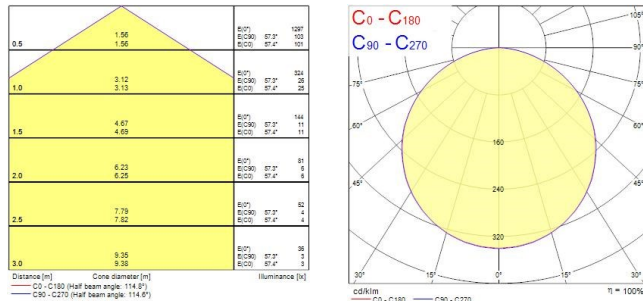

## TECHNICAL DRAWINGS

