


START Downlight Eco 215mm Round & Square Surface
START eco Downlight 215 2100lm 830 Surface
0054105



Product features

- START eco Downlight is an integrated LED surface mounted downlight with built-in non dimmable driver; 24W; 2100Lm; 88Lm/W; 3000K.

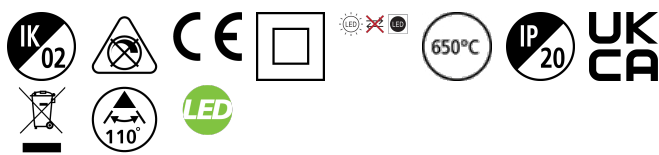


PRODUCT OVERVIEW

Product name	START eco Downlight 215 2100lm 830 Surface
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Retail
ETIM Class	EC002892
Warranty	3 years
Fixture luminous flux (lm)	2100
Luminaire efficacy (lm/W)	88
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class II
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288541051

PHOTOMETRY

START Downlight Eco 215mm Round & Square Surface
START eco Downlight 215 2100lm 830 Surface
0054105

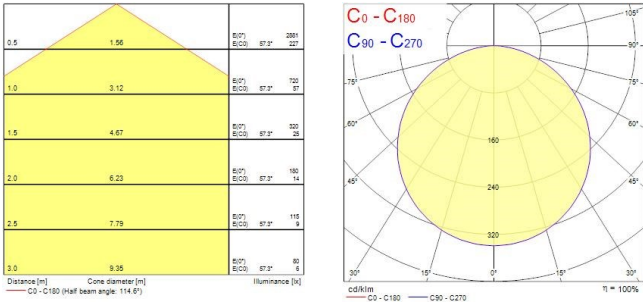

TECHNICAL DRAWINGS

