


START Flex Low Output  
START Flex IP20 840 2850lm  
0068101



Product features

- 5 metre IP20 LED reel with pre-attached 3M adhesive type; equipped with 300 LEDs; 2850lm per 5m (570lm per 1m); 24V; 4000K; CRI80; SDCM 3;Compatible with emergency packs: 0046600, 0046601

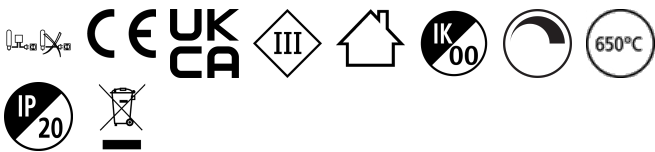


PRODUCT OVERVIEW


|                                 |                            |
|---------------------------------|----------------------------|
| Product name                    | START Flex IP20 840 2850lm |
| Technology                      | LED                        |
| Mount                           | Other                      |
| General application             | Hospitality, Retail        |
| ETIM Class                      | EC002706                   |
| E-number FI                     | 4276595                    |
| Warranty                        | 5 years                    |
| Fixture luminous flux (lm)      | 2850                       |
| Luminaire efficacy (lm/W)       | 119                        |
| Colour temperature (K)          | 4000                       |
| CRI (Ra)                        | 80                         |
| Colour Variation Initial (SDCM) | SDCM3                      |
| Beam Angle (°)                  | 120                        |
| Beam Angle (°)                  | N/A                        |
| Photobiological Risk Group      | RG1                        |
| Total power consumption (W)     | 24                         |
| Electrical protection           | Class III                  |
| Dimmable                        | Yes                        |
| Dimming method                  | Other                      |
| IP rating                       | IP20                       |
| IK rating                       | IK00                       |
| Product EAN number              | 5410288681016              |

PHOTOMETRY

START Flex Low Output  
START Flex IP20 840 2850lm  
0068101



| Distance [m] | Cone diameter [m] | Illuminance [lx]    |
|--------------|-------------------|---------------------|
| 0.5          | 1.01<br>1.05      | 501<br>50.1<br>50.1 |
| 1.0          | 2.01<br>2.07      | 125<br>12.5<br>12.5 |
| 1.5          | 3.02<br>3.10      | 44<br>4.4<br>4.4    |
| 2.0          | 4.02<br>4.14      | 25<br>2.5<br>2.5    |
| 2.5          | 5.03<br>5.18      | 16<br>1.6<br>1.6    |
| 3.0          | 6.03<br>6.21      | 11<br>1.1<br>1.1    |



TECHNICAL DRAWINGS

