

Insaver HO Topper LED II 205  
*Insaver HO Topper LED II 205 RO 21W NW*  
3033943



Product features

- IP44 from the front round LED downlight with outputs of up to 2,289lm and an efficacy of up to 99lm/W. Polycarbonate diffuser with a white bezel. Shallow recess depth (<65mm). Available in 12, 15, 21 & 25W in 150mm, 175mm, 205mm & 225mm cut out sizes. Perfect for up to 2x26W CFL replacement. Includes loop-in loop-out facility for quick installation.




PRODUCT OVERVIEW

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Product name                    | Insaver HO Topper LED II 205 RO 21W NW |
| Technology                      | LED                                    |
| Cap/Base                        | N/A                                    |
| Housing                         | Aluminium                              |
| Mount                           | Ceiling recessed mounting              |
| Environment                     | Interior                               |
| General application             | Hospitality                            |
| ETIM Class                      | EC001744                               |
| E-number SE                     | 7465649                                |
| Warranty                        | 5 years                                |
| Fixture luminous flux (lm)      | 1989                                   |
| Luminaire efficacy (lm/W)       | 95                                     |
| LOR (%)                         | 100                                    |
| Colour temperature (K)          | 4000                                   |
| Light colour                    | Neutral White                          |
| CRI (Ra)                        | 80                                     |
| Colour Variation Initial (SDCM) | SDCM3                                  |
| Beam Angle (°)                  | 74                                     |
| Glare control                   | < 24                                   |
| Photobiological Risk Group      | RG0                                    |
| Total power consumption (W)     | 21                                     |
| Electrical protection           | Class II                               |
| Control gear type               | LED driver constant current            |
| Dimmable                        | No                                     |
| Dimming method                  | N/A                                    |
| LED Flickering Rate             | Ultra low (5% or less)                 |
| Housing colour                  | RAL 9003 - Signal white                |
| IP rating                       | IP44/20                                |
| IK rating                       | IK07                                   |
| Product EAN number              | 8711971339434                          |

Insaver HO Topper LED II 205  
Insaver HO Topper LED II 205 RO 21W NW  
3033943

PHOTOMETRY

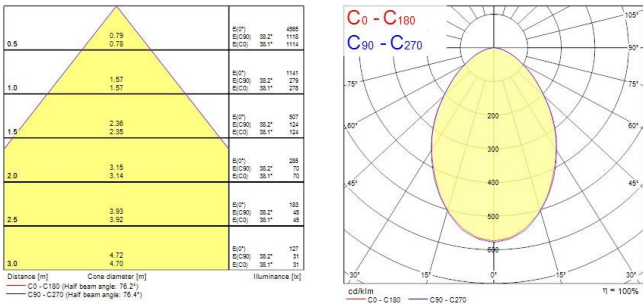

TECHNICAL DRAWINGS

