

Giotto LED 235  
GIOTTO 235 4000K RECESSED DALI  
3034758



Product features

- Ambient and decorative round, recessed mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1150lm, 10.1W, 114lm/W, 4000K, CRI 80, DALI, 120,000 hours lumen maintenance (L70:B50). Drive current: 275mA, IP44, IK10, Class I, 220-240V.




PRODUCT OVERVIEW

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Product name                    | GIOTTO 235 4000K RECESSED DALI    |
| Technology                      | LED                               |
| Cap/Base                        | N/A                               |
| Housing                         | PC Polycarbonate                  |
| Mount                           | Ceiling recessed mounting         |
| Environment                     | Indoor                            |
| General application             | Hospitality, Logistics & Industry |
| ETIM Class                      | EC002892                          |
| E-number FI                     | 4270060                           |
| Warranty                        | 5 years                           |
| Fixture luminous flux (lm)      | 1150                              |
| Luminous flux (lm)              | 1150                              |
| Luminaire efficacy (lm/W)       | 114                               |
| Colour temperature (K)          | 4000                              |
| Colour Code                     | 840                               |
| Light colour                    | Neutral White                     |
| CRI (Ra)                        | 80                                |
| Colour Variation Initial (SDCM) | SDCM3                             |
| Beam Angle (°)                  | 120                               |
| Glare control                   | < 25                              |
| Photobiological Risk Group      | RG0                               |
| Total power consumption (W)     | 10.1                              |
| Electrical protection           | Class I                           |
| Control gear type               | LED driver constant current       |
| Control gear mounting           | Integrated                        |
| Dimmable                        | Yes                               |
| Dimming method                  | DALI                              |
| Minimum dimming level (%)       | 1                                 |
| LED Flickering Rate             | Ultra low (5% or less)            |
| Housing colour                  | White                             |
| IP rating                       | IP44                              |
| IK rating                       | IK10                              |
| Product EAN number              | 8711971347583                     |

Giotto LED 235  
GIOTTO 235 4000K RECESSED DALI  
3034758

PHOTOMETRY

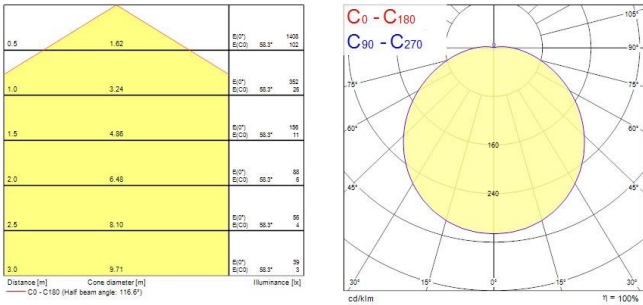

TECHNICAL DRAWINGS

