


Sterling Bulkhead - LED  
STERLING IP65 IK10 1325LM 830 SILVER  
4063833



Product features

- Led exterior bulkhead, Unique feature allowing a choice between High Output or High Efficiency with the flick of a switch, die-cast aluminium body, 684/1325LM, 9/17W, 76/78LM/W, 3000K, Driver Current: 350/750mA, CRI80, Non dimmable, IP65, IK10, lifespan 100,000hrs (L70:B50), (HxWxD) 350 x 350 x 128mm, 3.4kg, 3 step MacAdam ellipse, RAL 9006, Class 1, 230V, energy class: A++, A+, A




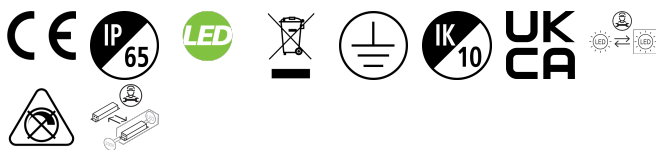


PRODUCT OVERVIEW

|                             |                                                                                      |
|-----------------------------|--------------------------------------------------------------------------------------|
| Product name                | STERLING IP65 IK10 1325LM 830 SILVER                                                 |
| Technology                  | LED                                                                                  |
| Cap/Base                    | N/A                                                                                  |
| Environment                 | Indoor, Outdoor                                                                      |
| General application         | Education, Hospitality, Logistics & Industry, Office, Residential & Consumer, Retail |
| ETIM Class                  | EC002892                                                                             |
| E-number FI                 | 4579259                                                                              |
| Warranty                    | 5 years                                                                              |
| Fixture luminous flux (lm)  | 684/1325                                                                             |
| Luminaire efficacy (lm/W)   | 78                                                                                   |
| LOR (%)                     | 100                                                                                  |
| Colour temperature (K)      | 3000                                                                                 |
| Light colour                | Warm White                                                                           |
| CRI (Ra)                    | 80                                                                                   |
| Photobiological Risk Group  | RG1                                                                                  |
| Total power consumption (W) | 9/17                                                                                 |
| Electrical protection       | Class I                                                                              |
| Dimmable                    | No                                                                                   |
| Housing colour              | Silver                                                                               |
| IP rating                   | IP65                                                                                 |
| IK rating                   | IK10                                                                                 |
| Product EAN number          | 5026524638333                                                                        |

PHOTOMETRY

Sterling Bulkhead - LED  
STERLING IP65 IK10 1325LM 830 SILVER  
4063833



TECHNICAL DRAWINGS

